
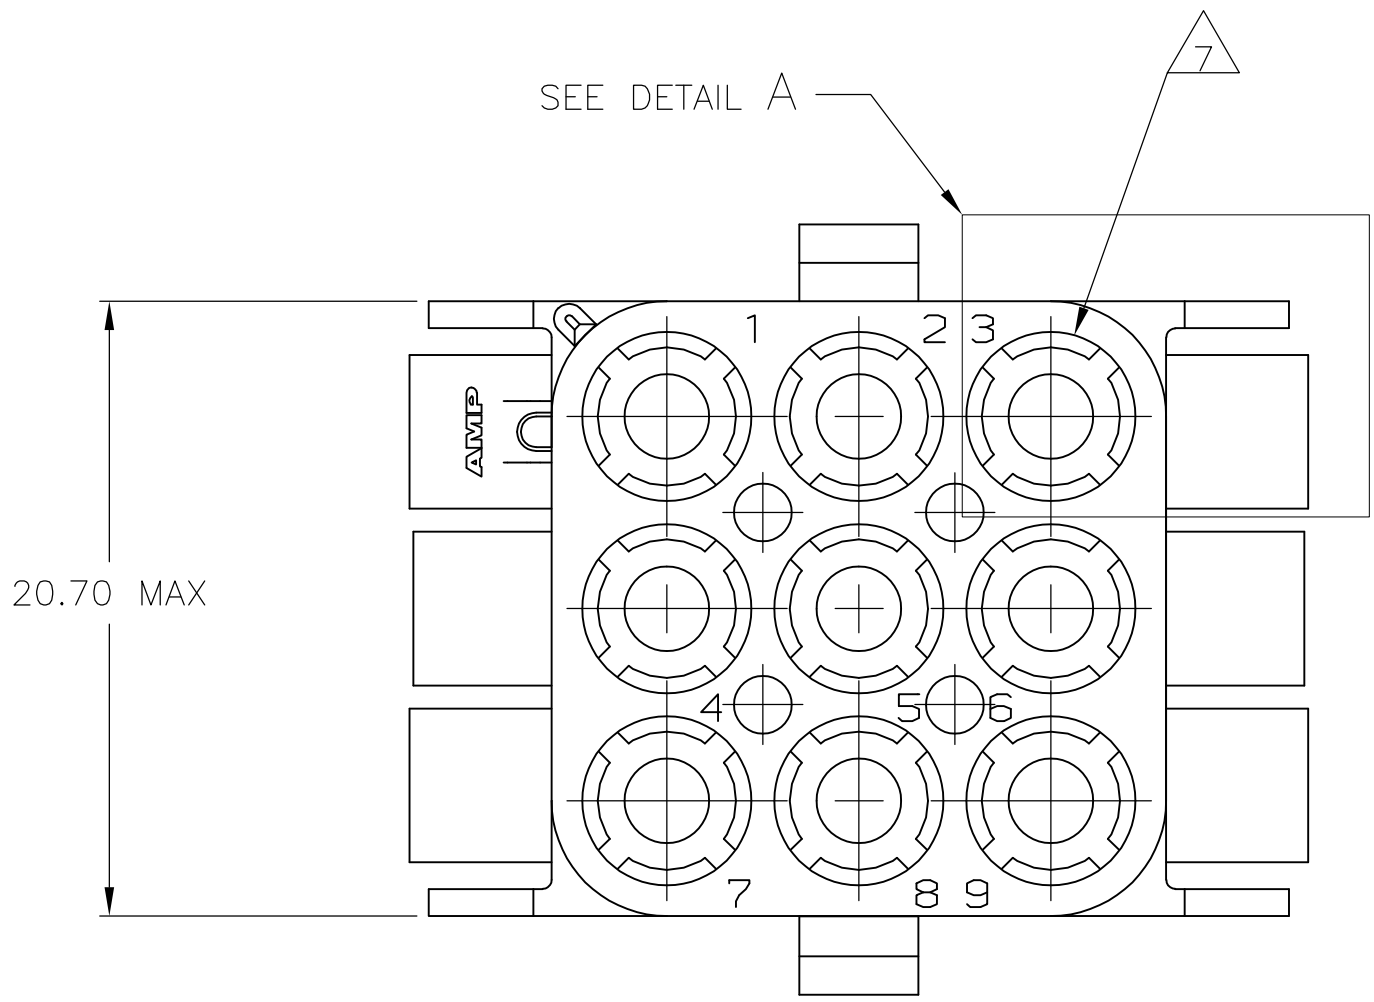
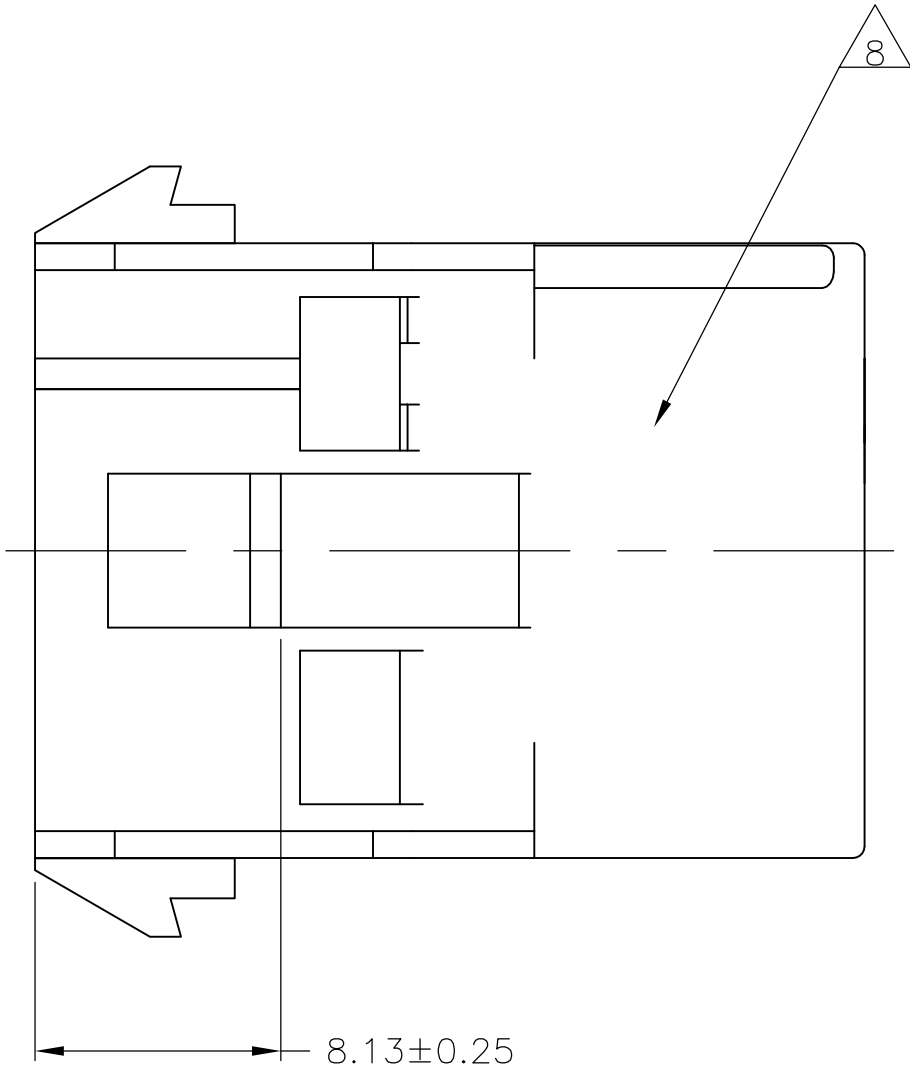


LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN
		AL1	REVISED PER ECR-17-008392		26JUN2017	BW

D

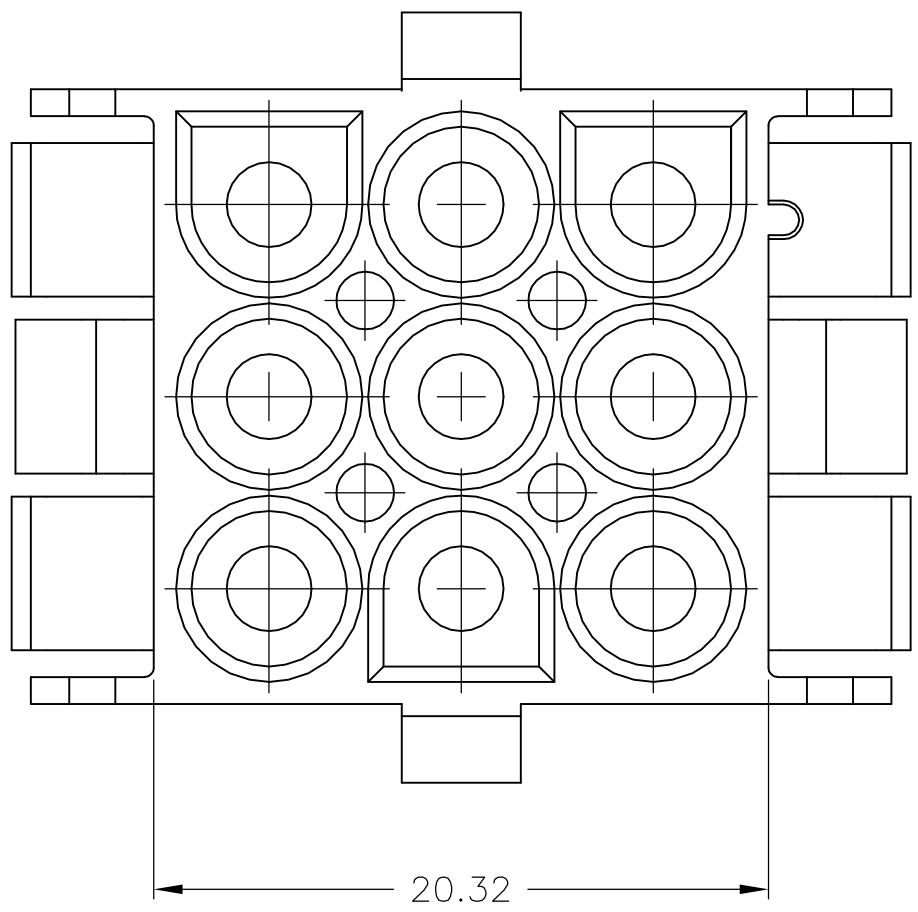

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.

OPTIONAL FOR KEYING HOUSING IN PANEL.

CIRCUIT NUMBER 1 LOCATION.


DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.



UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

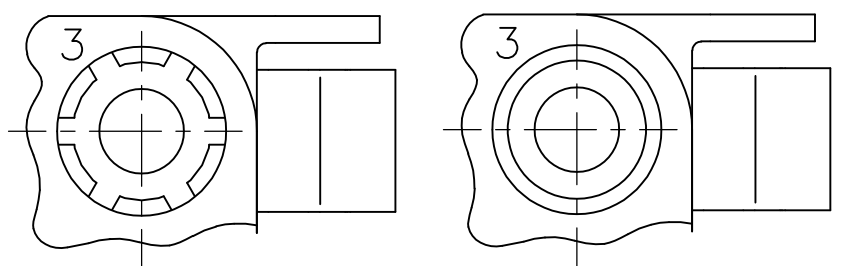


DETAIL A
OPTIONAL CONSTRUCTIONS

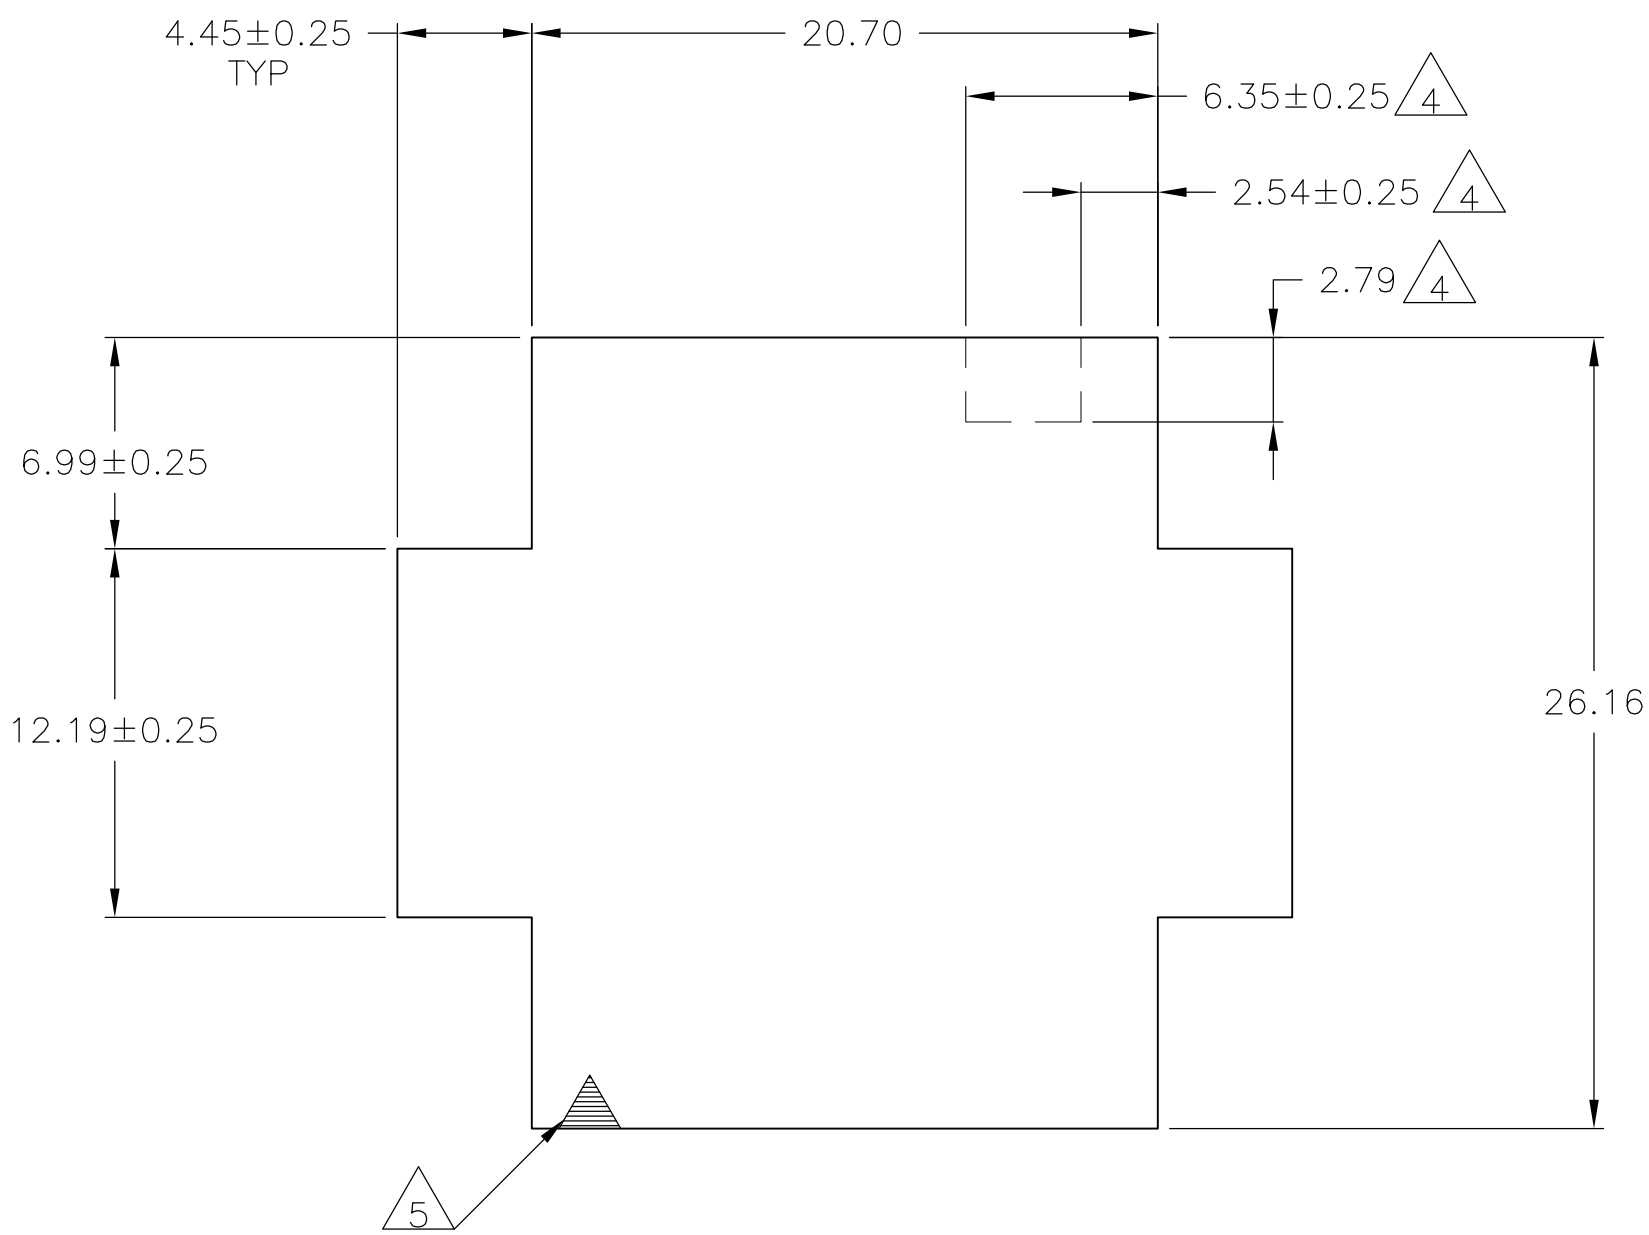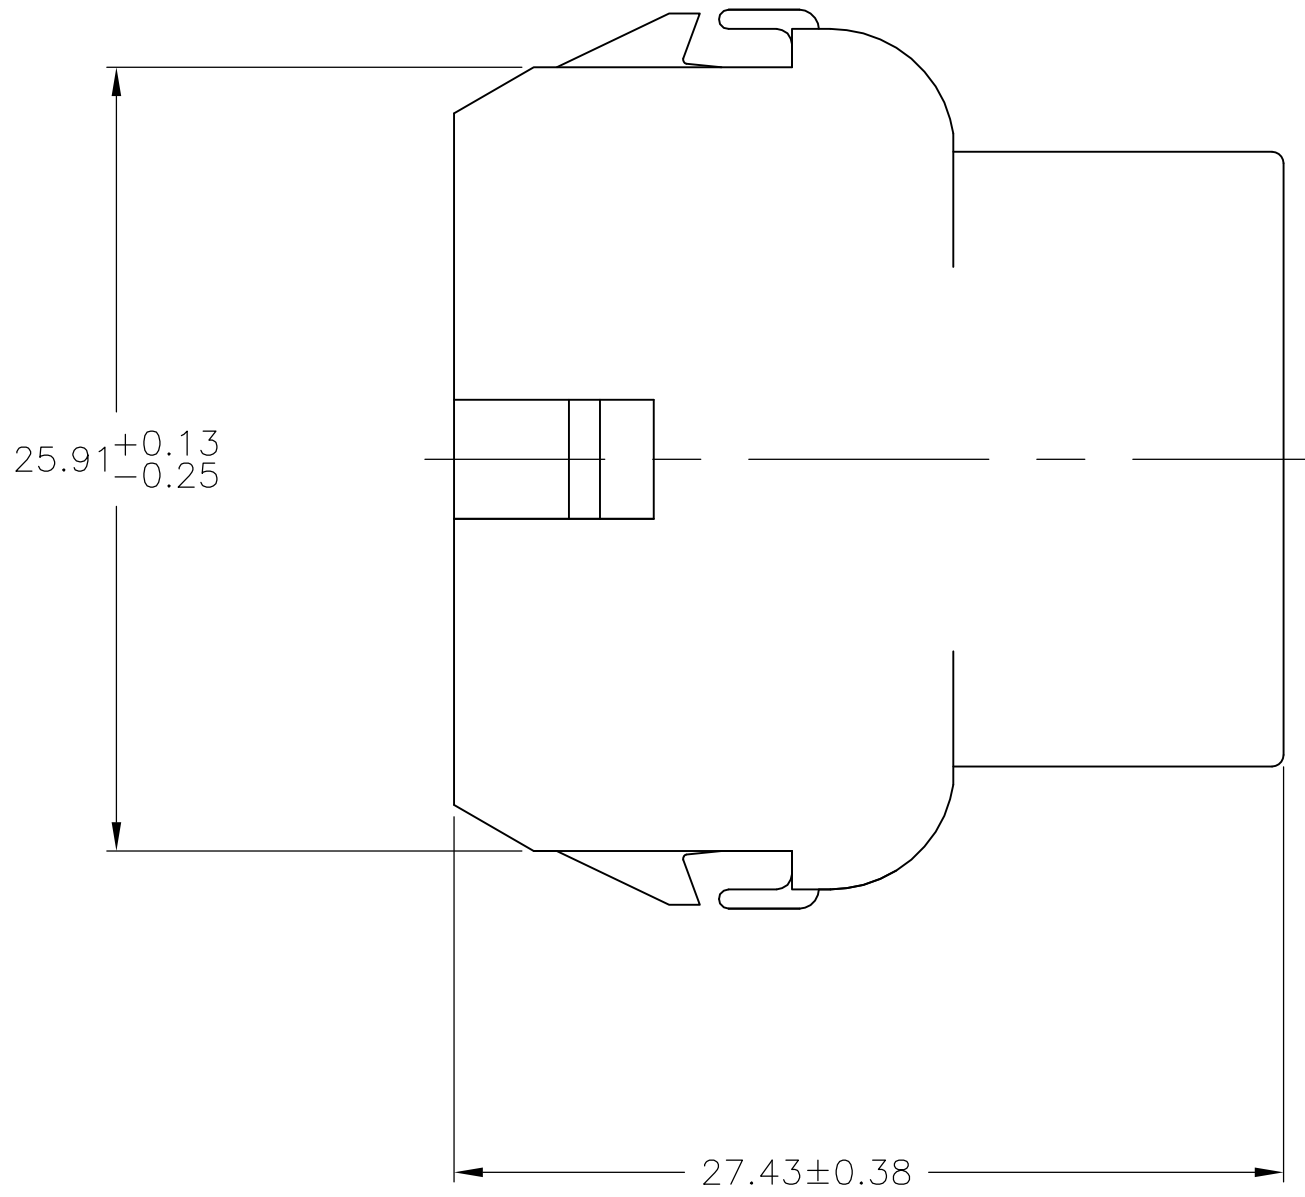

RECOMMENDED PANEL CUT OUT

B

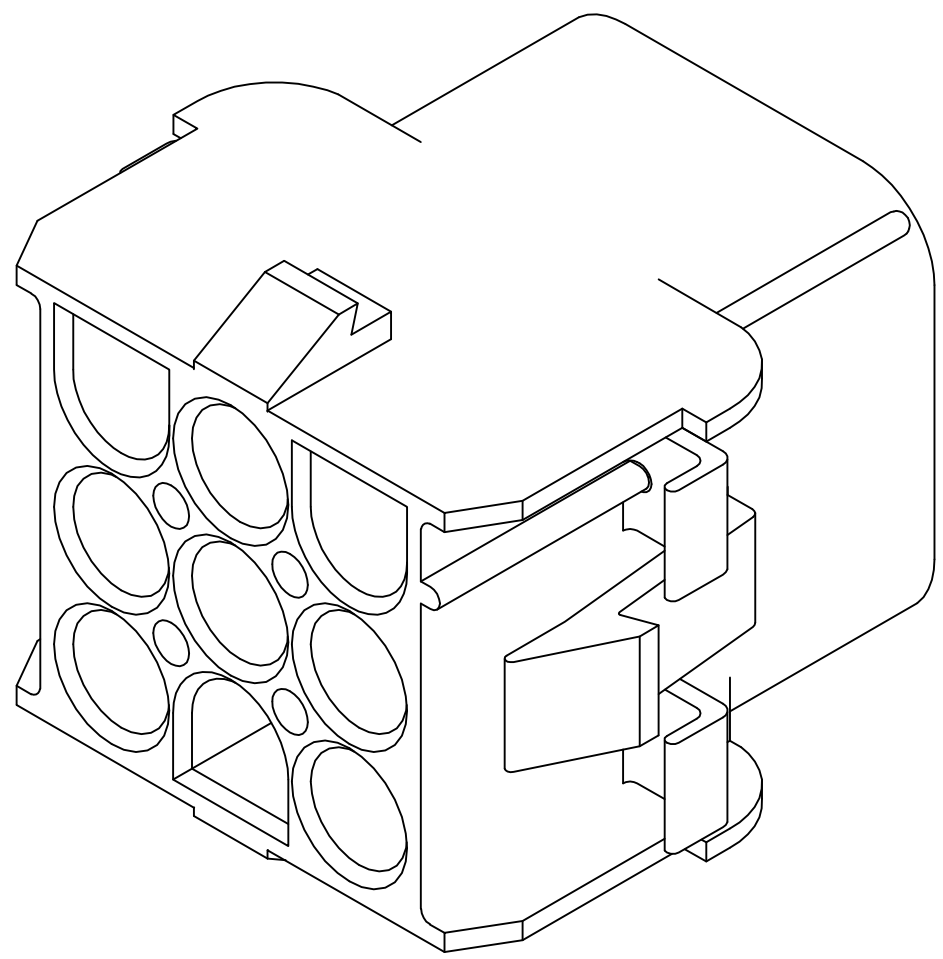

3-DIMENSIONAL MODEL
NTS


6.35	.250	—	—
4.45	.175	27.43	1.080
2.79	.110	26.43	1.041
2.54	.100	25.91	1.020
2.29	.090	20.70	.815
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN

CONVERSION TABLE





OBSOLETE	BLACK	1-480707-9
	GRAY	1-480707-8
SUPERSEDED BY 1-480707-0	BLUE	1-480707-6
	GREEN	1-480707-5
OBSOLETE	YELLOW	1-480707-4
	ORANGE	1-480707-3
	RED	1-480707-2
	BROWN	1-480707-1
	NATURAL	1-480707-0
	COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN K. WHITAKER	29JUL04	 TE Connectivity		
			CHK S. RIDGILL	29JUL04			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL	29JUL04	NAME	CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)		
		PRODUCT SPEC					
	0 PLC ± -			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	1 PLC ± -			A1	00779	C=480707	-
2 PLC ± 0.13							
3 PLC ± -			APPLICATION SPEC				
4 PLC ± -			WEIGHT				
ANGLES FINISH	± 0°30'			CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 2 REV AL	
MATERIAL NYLON, UL94V-2	-						

REV	DATE	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

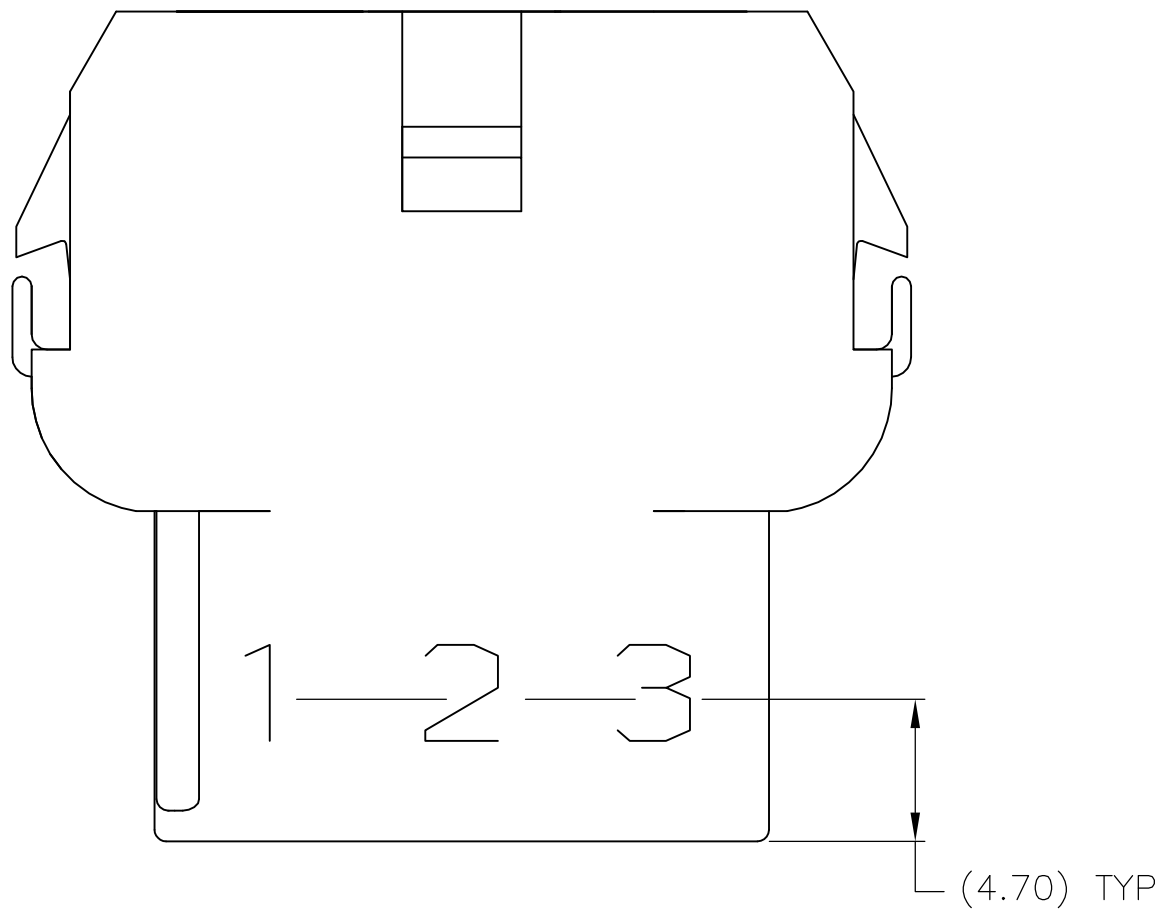

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

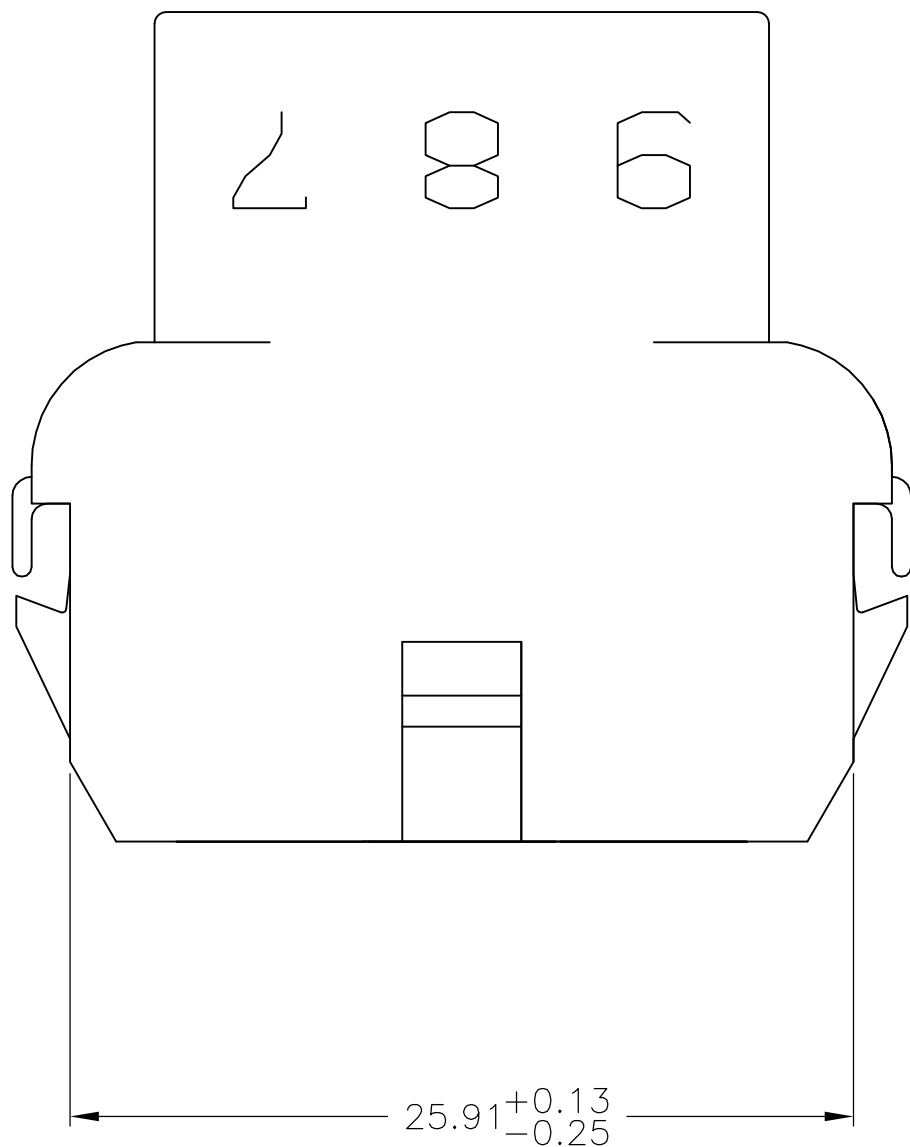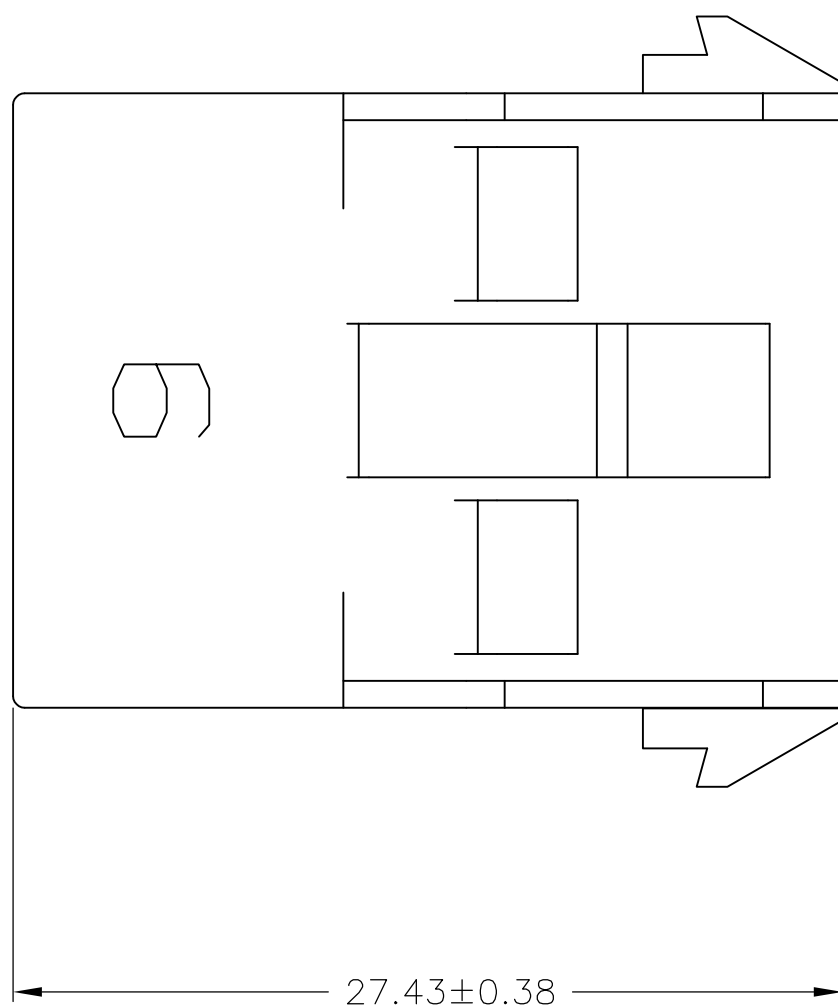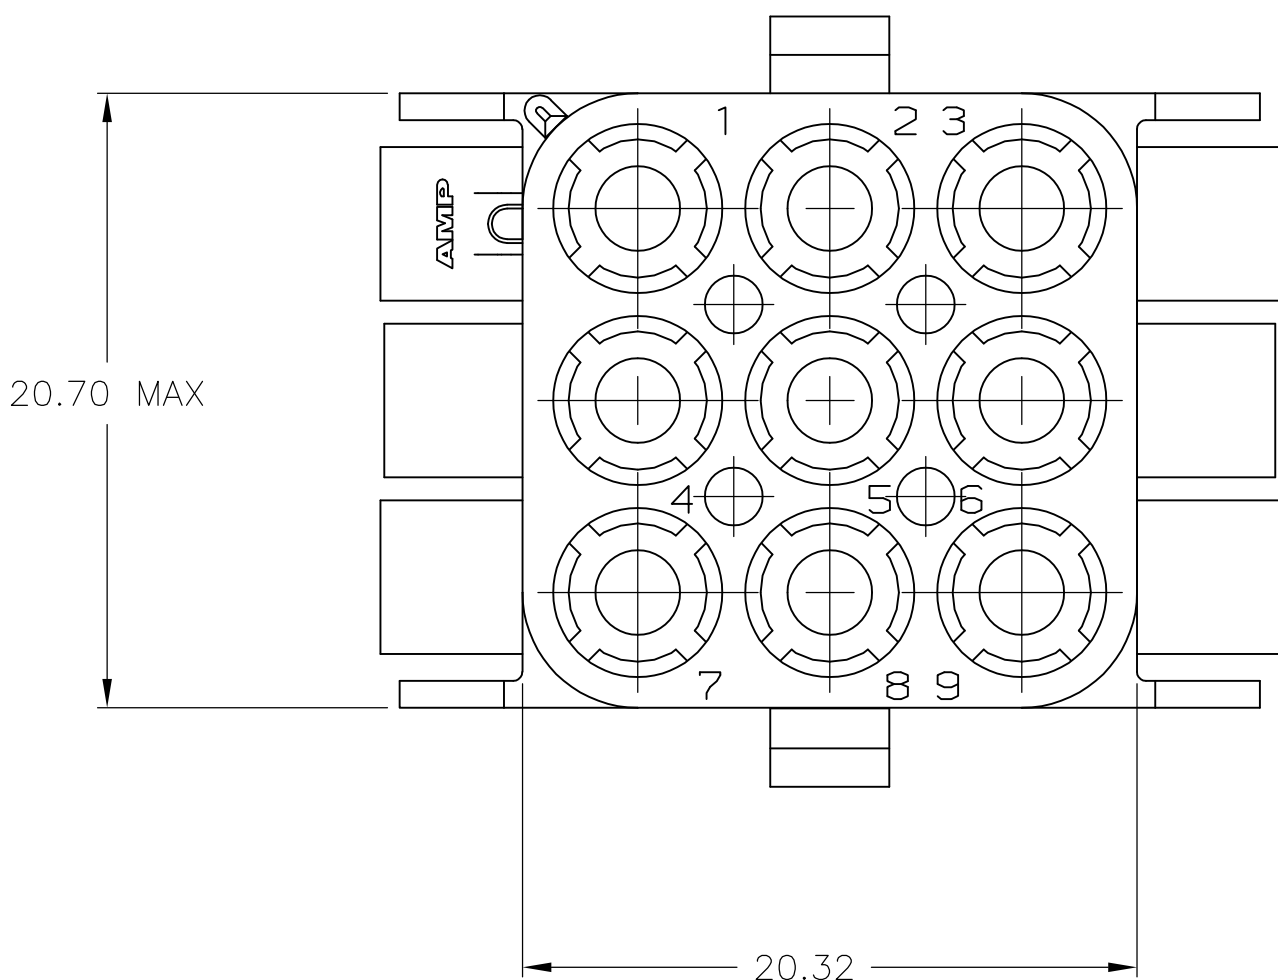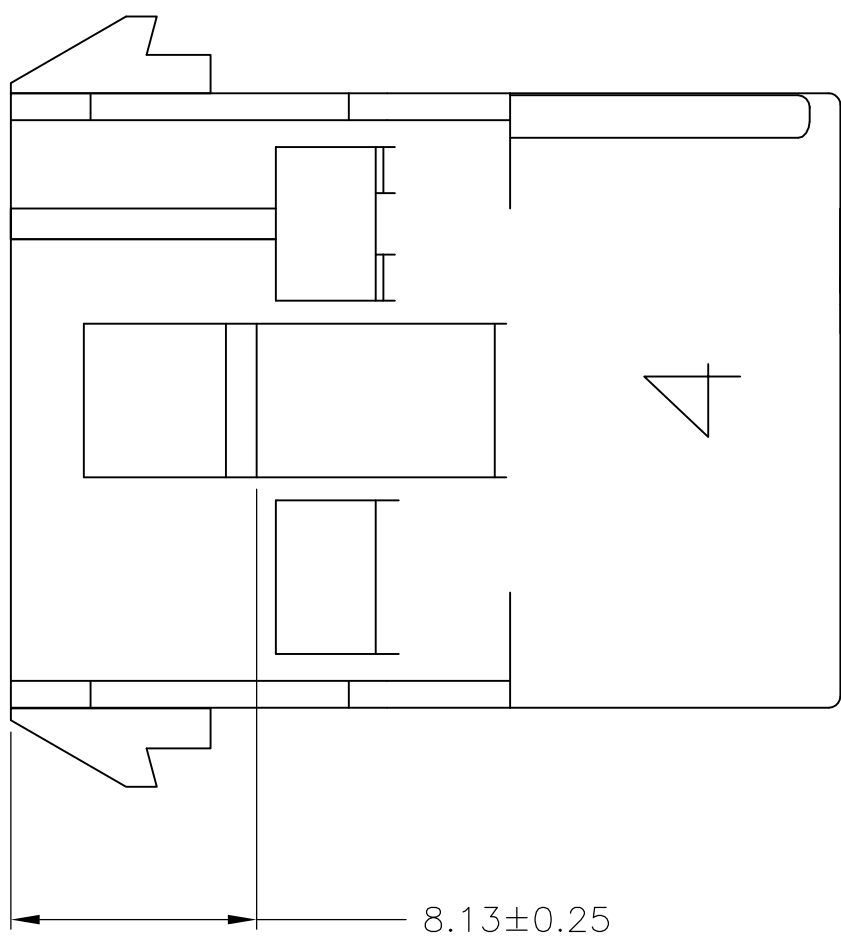

5.08	.200	—	—
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.70	.815
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN

CONVERSION TABLE

NATURAL	2-480707-0
COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
K. WHITAKER
CHK
S. RIDGILL
APVD
S. RIDGILL

29JUL04
29JUL04
29JUL04

TE Connectivity

NAME

CAP,
9 CIRCUIT,
UNIVERSAL MATE-N-LOK(TM)

SIZE
A1

CAGE CODE
00779

DRAWING NO
480707

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
4:1

SHEET
2

OF
2

REV
AL1