

## High Temperature Silicon Carbide Power Schottky Diode


$V_{RRM}$	=	300 V
$I_F$ ( $T_C=25^\circ\text{C}$ )	=	4 A
$Q_C$	=	9 nC

### Features

- 300 V Schottky rectifier
- 225 °C maximum operating temperature
- Zero reverse recovery charge
- Superior surge current capability
- Positive temperature coefficient of  $V_F$
- Temperature independent switching behavior
- Lowest figure of merit  $Q_C/I_F$
- Available screened to Mil-PRF-19500

### Package

- RoHS Compliant



TO – 46

### Advantages

- High temperature operation
- Improved circuit efficiency (Lower overall cost)
- Low switching losses
- Ease of paralleling devices without thermal runaway
- Smaller heat sink requirements
- Industry's lowest reverse recovery charge
- Industry's lowest device capacitance
- Ideal for output switching of power supplies
- Best in class reverse leakage current at operating temperature

### Applications

- Down Hole Oil Drilling
- Geothermal Instrumentation
- Solenoid Actuators
- General Purpose High-Temperature Switching
- Amplifiers
- Solar Inverters
- Switched-Mode Power Supply (SMPS)
- Power Factor Correction (PFC)

### Maximum Ratings at $T_j = 225^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Values	Unit
Repetitive peak reverse voltage	$V_{RRM}$		300	V
Continuous forward current	$I_F$	$T_C = 25^\circ\text{C}$	4	A
Continuous forward current	$I_F$	$T_C \leq 225^\circ\text{C}$	2	A
RMS forward current	$I_{F(RMS)}$	$T_C \leq 225^\circ\text{C}$	4	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25^\circ\text{C}$ , $t_p = 10\text{ ms}$	10	A
Non-repetitive peak forward current	$I_{F,max}$	$T_C = 25^\circ\text{C}$ , $t_p = 10\text{ }\mu\text{s}$	65	A
$I^2t$ value	$\int I^2 dt$	$T_C = 25^\circ\text{C}$ , $t_p = 10\text{ ms}$	0.5	$\text{A}^2\text{S}$
Power dissipation	$P_{tot}$	$T_C = 25^\circ\text{C}$	64	W
Operating and storage temperature	$T_j, T_{stg}$		-55 to 225	$^\circ\text{C}$

### Electrical Characteristics at $T_j = 225^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Diode forward voltage	$V_F$	$I_F = 1\text{ A}$ , $T_j = 25^\circ\text{C}$ $I_F = 1\text{ A}$ , $T_j = 225^\circ\text{C}$		1.6 2.6		V
Reverse current	$I_R$	$V_R = 300\text{ V}$ , $T_j = 25^\circ\text{C}$ $V_R = 300\text{ V}$ , $T_j = 225^\circ\text{C}$		1 5	5 50	$\mu\text{A}$
Total capacitive charge	$Q_C$	$I_F \leq I_{F,MAX}$ $dI_F/dt = 200\text{ A}/\mu\text{s}$ $T_j = 210^\circ\text{C}$		9		nC
Switching time	$t_s$	$V_R = 300\text{ V}$		< 17		ns
Total capacitance	$C$	$V_R = 1\text{ V}$ , $f = 1\text{ MHz}$ , $T_j = 25^\circ\text{C}$		76		pF
		$V_R = 300\text{ V}$ , $f = 1\text{ MHz}$ , $T_j = 25^\circ\text{C}$		15		

### Thermal Characteristics


Thermal resistance, junction - case	$R_{thJC}$	5.55	$^\circ\text{C}/\text{W}$
-------------------------------------	------------	------	---------------------------

### Mechanical Properties


Mounting torque	M	0.6	Nm
-----------------	---	-----	----

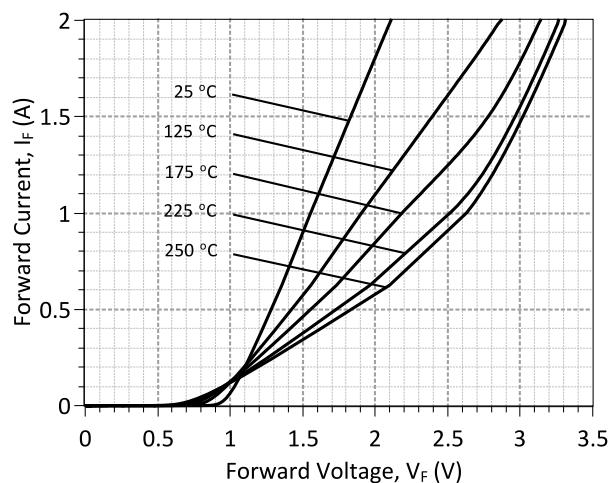


**Figure 1: Typical Forward Characteristics**

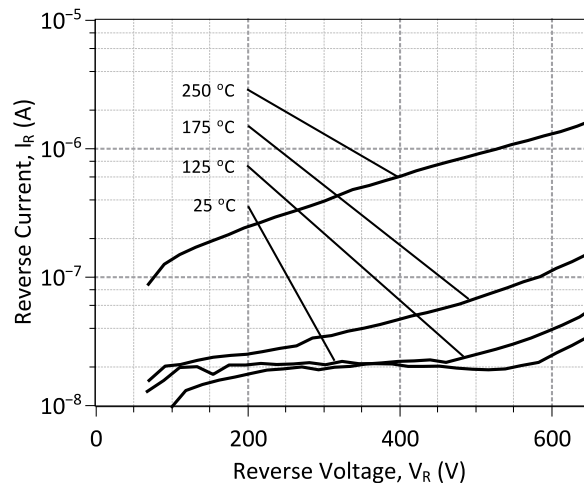


**Figure 2: Typical Reverse Characteristics**

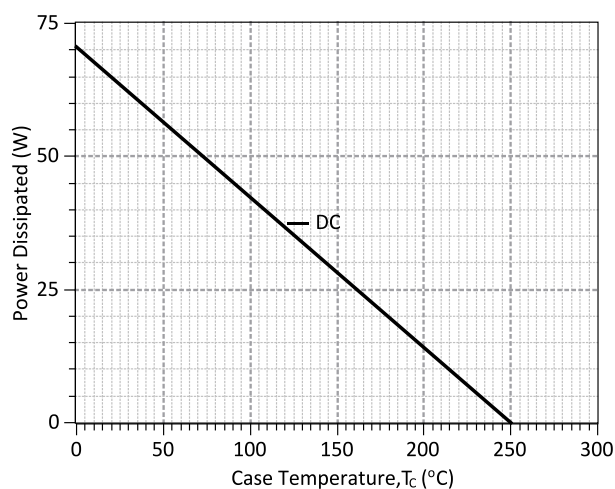


**Figure 3: Power Derating Curve**

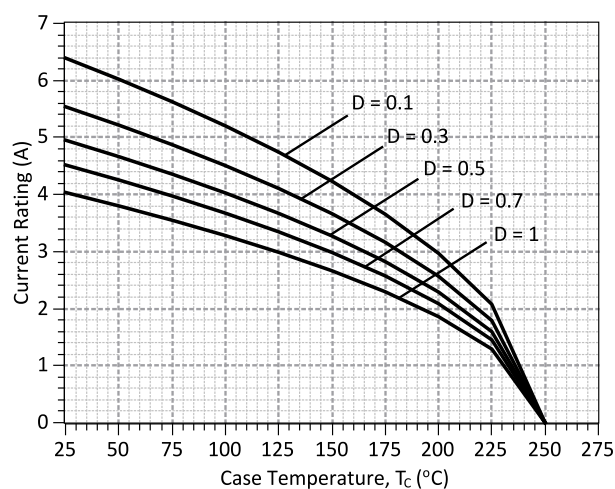


**Figure 4: Current Derating Curves ( $D = t_p/T$ ,  $t_p = 400 \mu s$ )  
(Considering worst case  $Z_{th}$  conditions)**

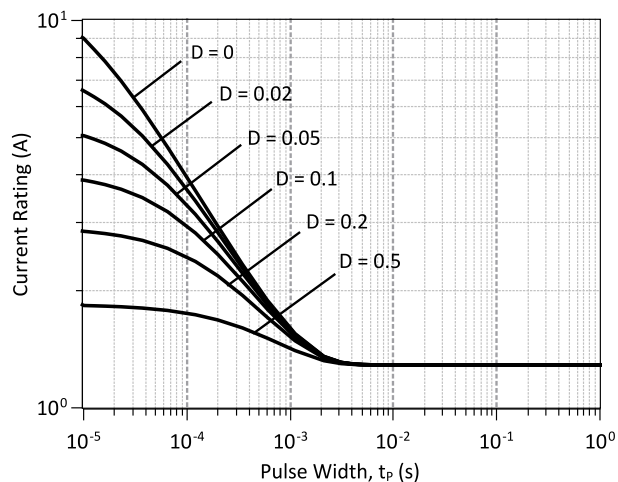

**Figure 5: Current vs Pulse Duration Curves at  $T_C = 225 \text{ } ^\circ\text{C}$**

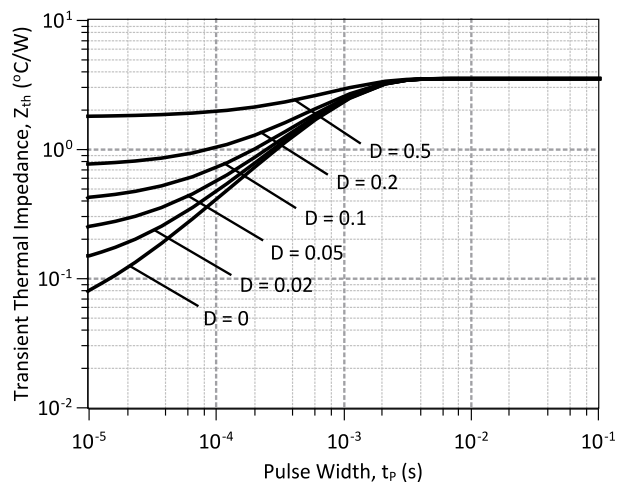

**Figure 6: Transient Thermal Impedance**

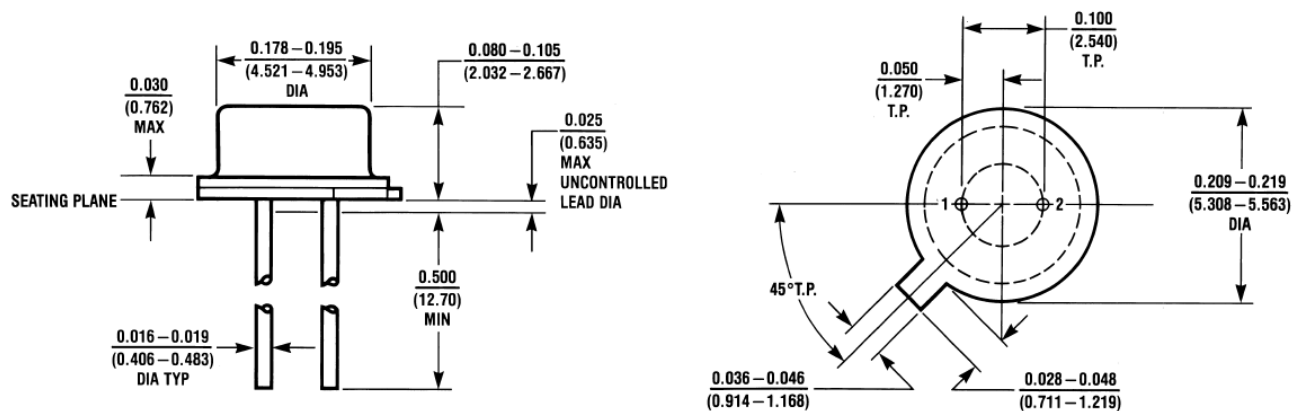**Package Dimensions:**
**TO-46**
**PACKAGE OUTLINE**

**NOTE**

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

**Revision History**

Date	Revision	Comments	Supersedes
2014/08/29	0	Initial release	

Published by

GeneSiC Semiconductor, Inc.  
 43670 Trade Center Place Suite 155  
 Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

## SPICE Model Parameters

This is a secure document. Copy this code from the SPICE model PDF file on our website into a SPICE software program for simulation of the GB02SHT03-46.

```
*      MODEL OF GeneSiC Semiconductor Inc.
*
*      $Revision:   1.0           $
*      $Date:      29-AUG-2014    $
*
*      GeneSiC Semiconductor Inc.
*      43670 Trade Center Place Ste. 155
*      Dulles, VA 20166
*
*      COPYRIGHT (C) 2014 GeneSiC Semiconductor Inc.
*      ALL RIGHTS RESERVED
*
*      These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
*      OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
*      TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
*      PARTICULAR PURPOSE."
*      Models accurate up to 2 times rated drain current.
*
*      Start of GB02SHT03-46 SPICE Model
*
.SUBCKT GB02SHT03ANODE KATHODE
D1 ANODE KATHODE GB02SHT03_25C; Call the Schottky Diode Model
D2 ANODE KATHODE GB02SHT03_PIN; Call the PiN Diode Model
.MODEL GB02SHT03_25C D
+ IS      3.57E-18          RS      0.49751
+ TRS1    0.0057           TRS2    2.40E-05
+ N       1                IKF      322
+ EG      1.2              XTI      3
+ CJO     9.12E-11         VJ       0.371817384
+ M       1.527759838      FC       0.5
+ TT      1.00E-10         BV       300
+ IBV     1.00E-03         VPK      300
+ IAVE    2                TYPE     SiC_Schottky
+ MFG     GeneSiC_Semiconductor
.MODEL GB02SHT03_PIN D
+ IS      5.73E-11          RS      0.72994
+ N       5                IKF      800
+ EG      3.23             XTI      -14
+ FC      0.5              TT       0
+ BV      300              IBV      1.00E-03
+ VPK     300              IAVE     2
+ TYPE    SiC_PiN
.ENDS
*
*      End of GB02SHT03 SPICE Model
```