
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	PRELIMINARY	03/21/07	JMC	

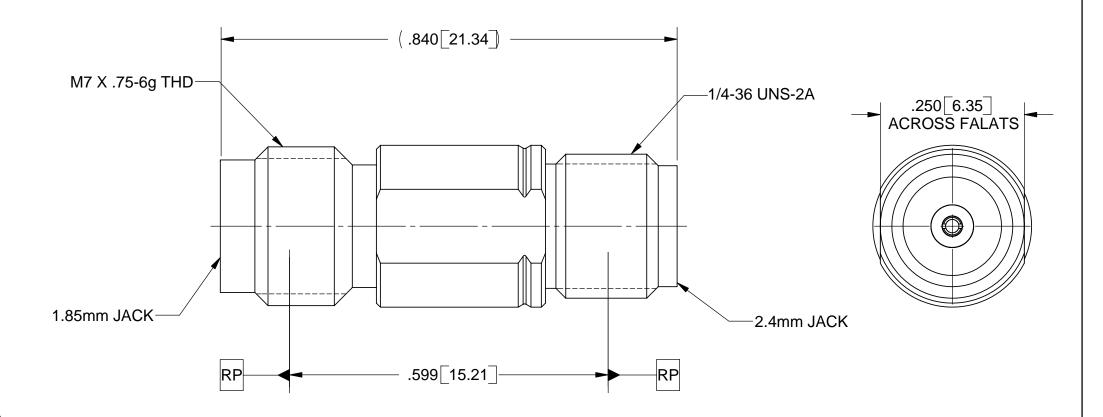

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACTS:

INSULATOR: KEL-F PER ASTM D1437.

ULTEM 1000

SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60 GASKET:

FINISH:

BODY: PASSIVATED PER AMS-2700, TYPE 2

CONTACTS:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 50 GHz INS. LOSS: 0.40dB MAX. VSWR:

1.30:1 MAX. AT 50 GHz

MAT	ERIAL:	SEE NOTES			
FINIS	SH:	SEE NOTES			
SUR	SURFACE AREA: N/A				
	PROPRIETARY				
IS TH ANY WITH	THE INFORMATION CONTAINED IN THIS DRAWII IS THE SOLE PROPERTY OF SV MICROWAVE, IN ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE. INC IS PROHIBITED.				

SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES	
SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1	
N/A	.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANC	
OPRIETARY	PER ASME Y14.5M - 1994	
CONTAINED IN THIS DRAWING ERTY OF SV MICROWAVE. INC.	THIRD ANGLE PROJECTION	
LIXTI OI 3V WIICKOWAVE, INC.		

.XXX ±.005	5) SUI
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	
THIRD ANGLE PROJECTION	
	CH

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 15T & LAST THREADS.
5) SURFACE ROUGHNESS 63 V. MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

ANGLE PROJECTION	DRAWN:	MMH 03/21/07
A []	CHECKED:	JMC 03/21/07
	APPROVED:	JMC 03/21/07

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

TITLE: 1.85mm JACK TO 2.4mm **JACK ADAPTER**

SIZE CAGE CODE DWG. NO. B 95077 SF1133-6003 SCALE: 6:1

SHEET 1 OF 1