


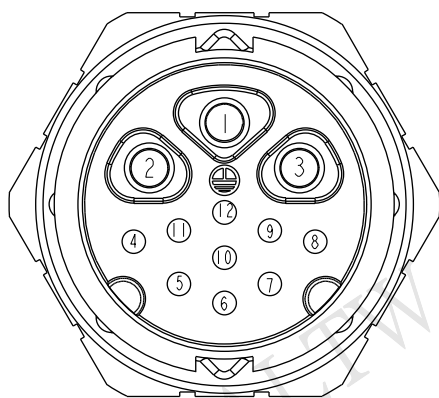



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1350055	2013/04/24	Ruru	Modify Cable OD Max
C	LEN15B0042	2015/10/27	Ruru	Change Logo

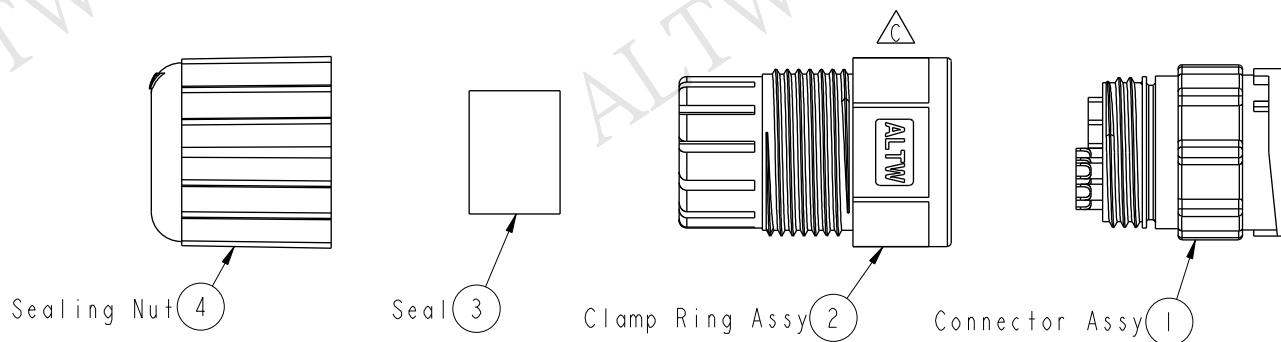

- Note:
- *  Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Clamp Ring: Nylon, Black
 - * Seal: EPDM, Black
 - * Sealing Nut: Nylon, Black
 - *  Cable OD Max : $\varnothing 10.0 \sim \varnothing 12.4 \text{mm}$

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Large Assy Connector		DCD-12BMDA-LL7001		Ruru		2015-10-27	
.XXX ±0.05		ANGLES ±1°		MConn 3FPin(20A)+9MPin(5A)		DWG NO		CHECKED BY		DATE	
				SCALE 1:1		DCD-12BMDA-LL7001		Rita		2015-10-27	
				REV. C		CUSTOMER		APPROVED BY		DATE	
				WC-REV. B.2		ALTW		Lisa		2015-10-27	
				 : Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司