


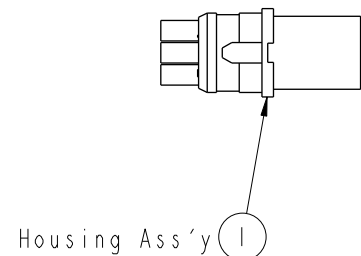
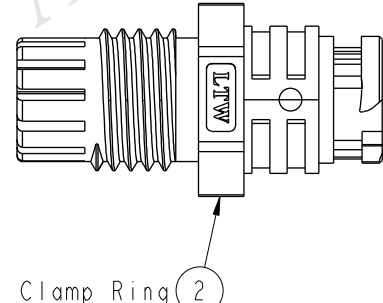




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	Ruru	2012/10/25	PLD-04BMFA-QL7001 To PLD-04BMFA-QL7001
B	LEN1510155	Vicky	2015/01/08	Update Logo & Tolerance



Pin Assignments
Front View

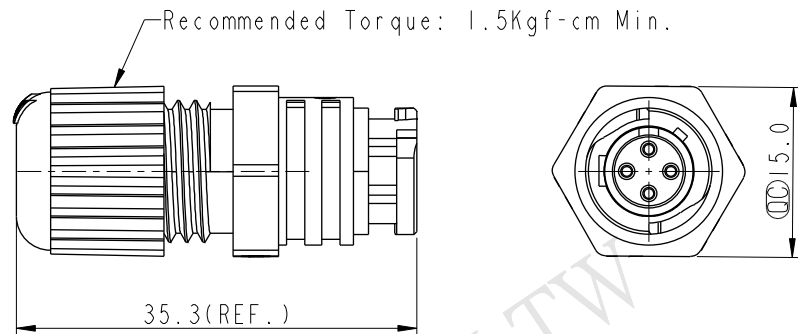

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Female Pin: Copper Alloy, Gold Plated
 - * Housing: Nylon, UL 94V-0, Black.
 - * Seal: Silicone, UL 94V-0, Gray.
 - * Clamp Ring: Nylon, UL 94V-2, Black.
 - * Sealing Nut: Nylon, UL 94V-2, Black.
 - * Seals for Cable OD: $\varnothing 4.5\text{mm}$ ~ $\varnothing 6.5\text{mm}$
 - * Operating Voltage Max: AC 300 V Rms.
 - * Operating Current Max: 5A.
 - * One Set Unassembled In One Bag.

UNIT:mm	
TOLERANCE	$\pm 0.5 \text{ mm}$

TITLE ASSY,PUSH LOCK,4PIN M CONN F PIN			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO PLD-04BMFA-QL7001	DRAWN BY Vicky	DATE 2015-01-08
DWG NO PLD-04BMFA-QL7001	CHECKED BY Sam	DATE 2015-01-08
CUSTOMER ALTW	APPROVED BY Rita	DATE 2015-01-08