
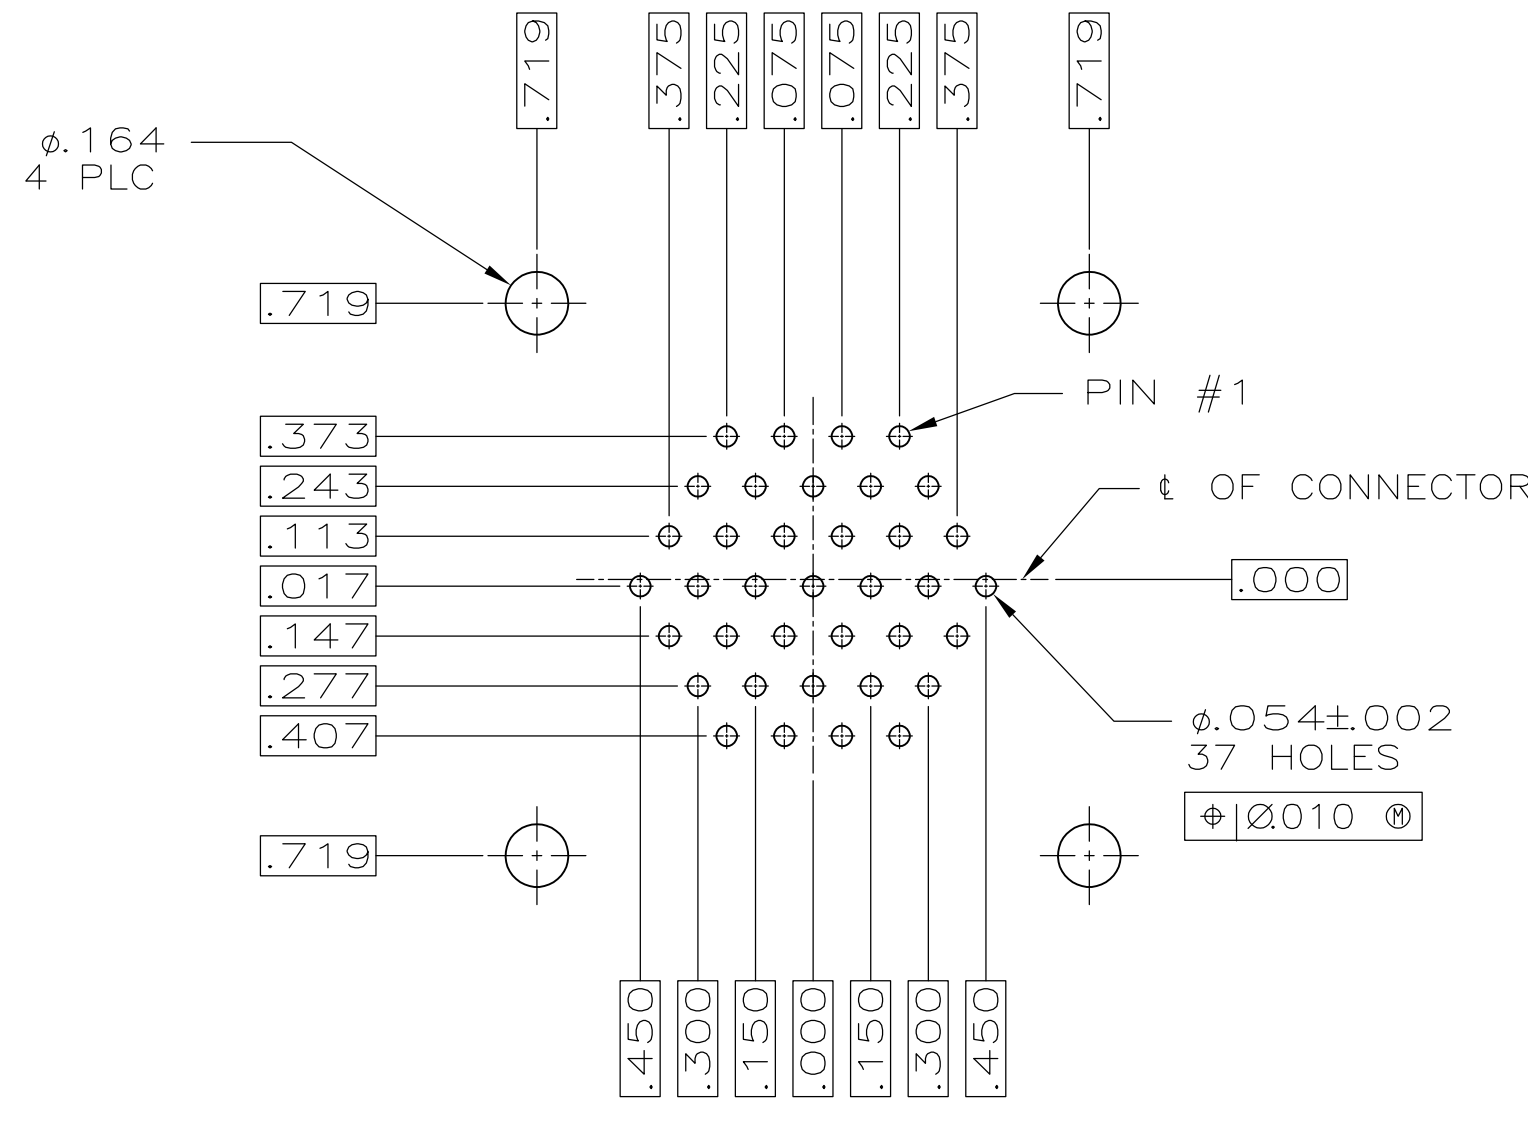
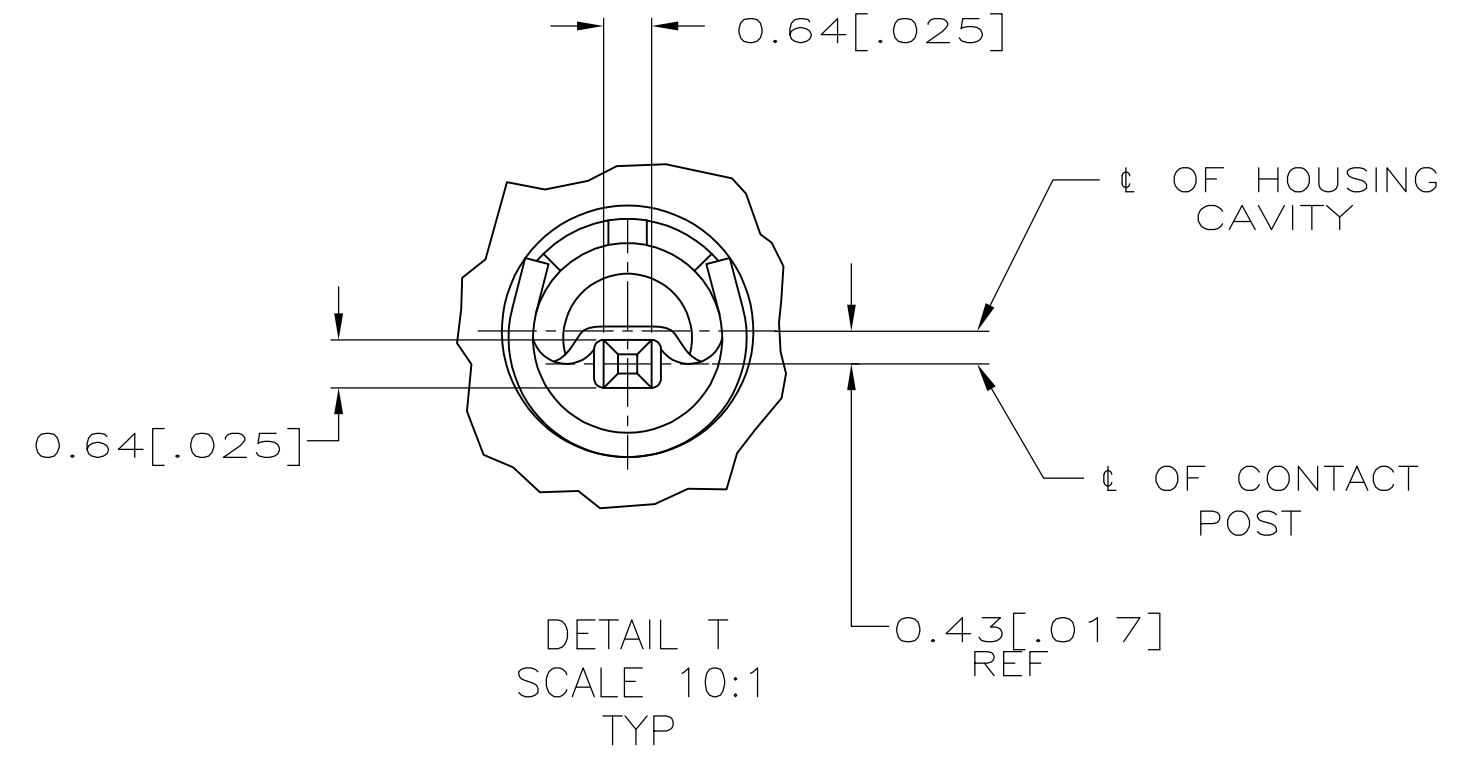
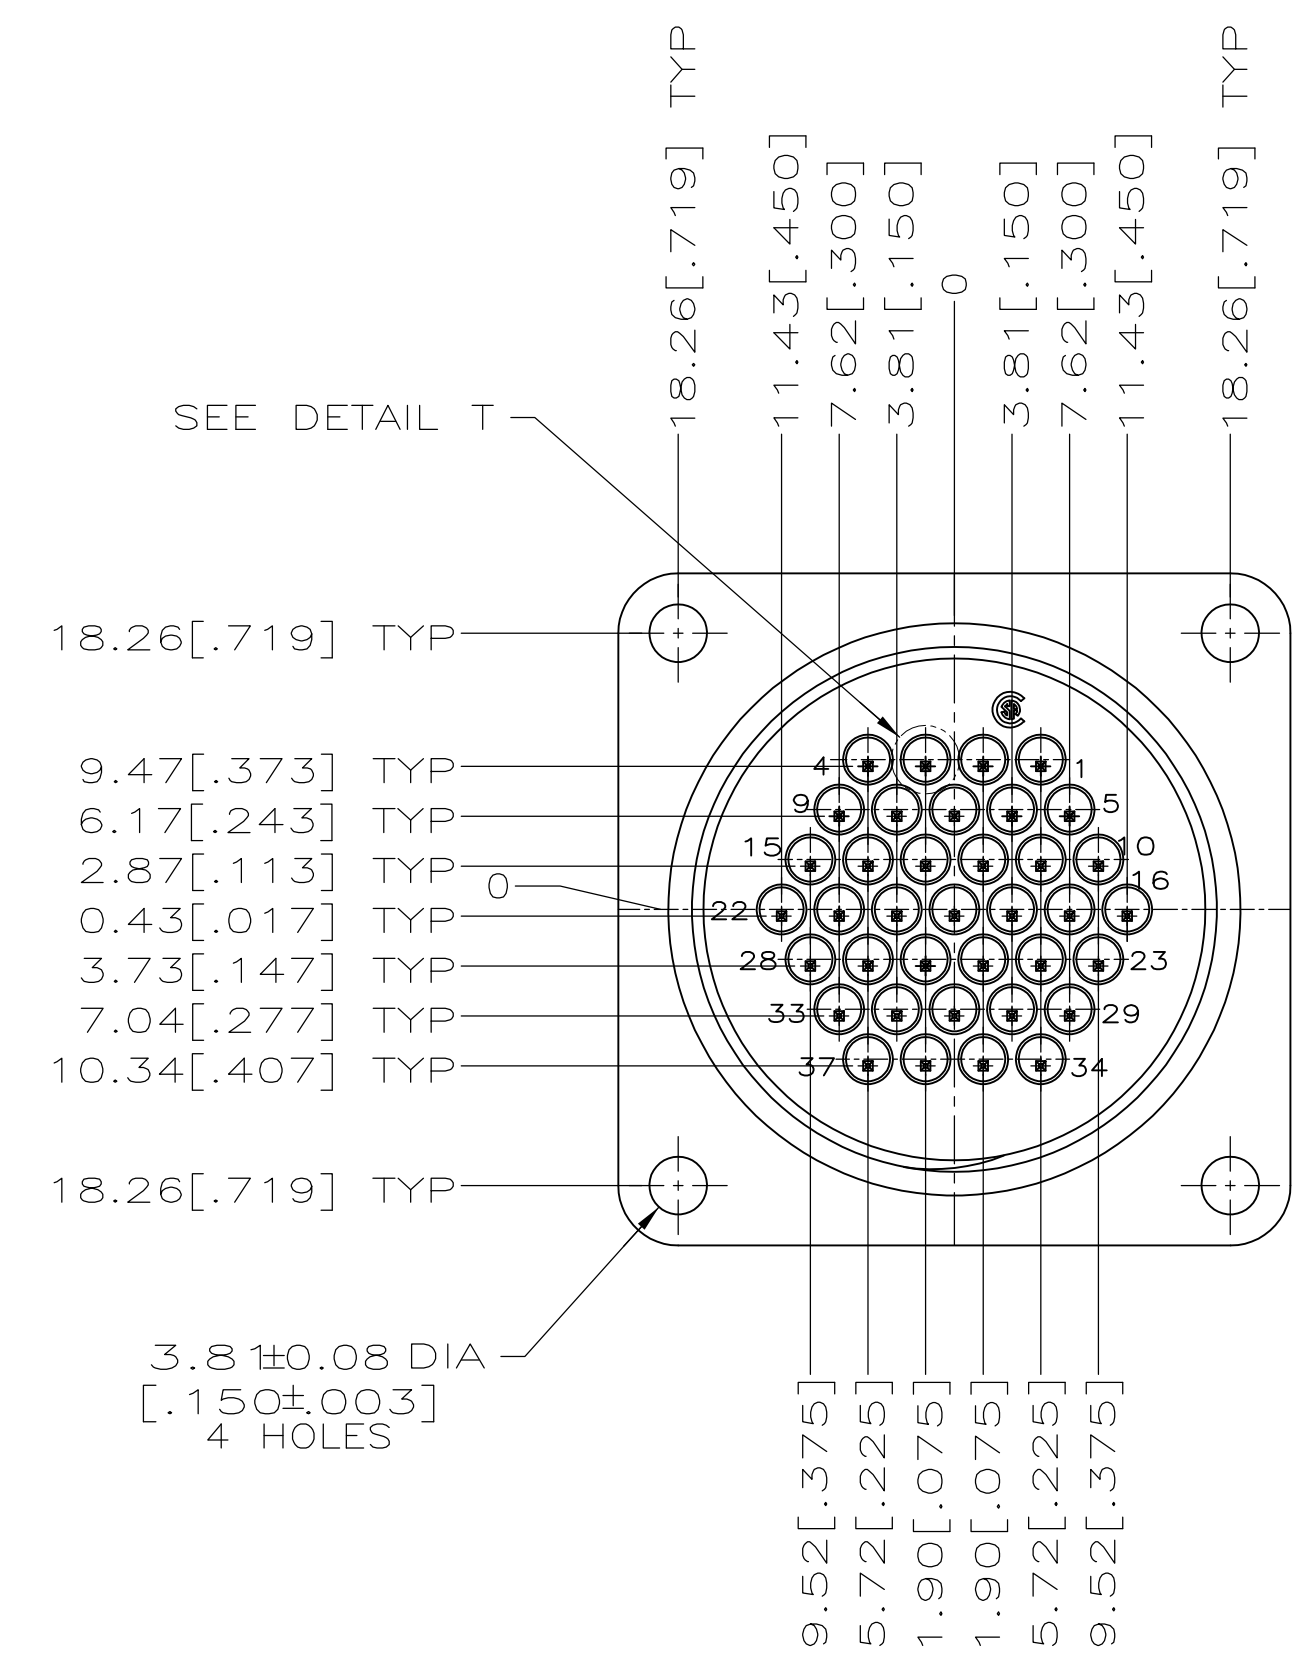
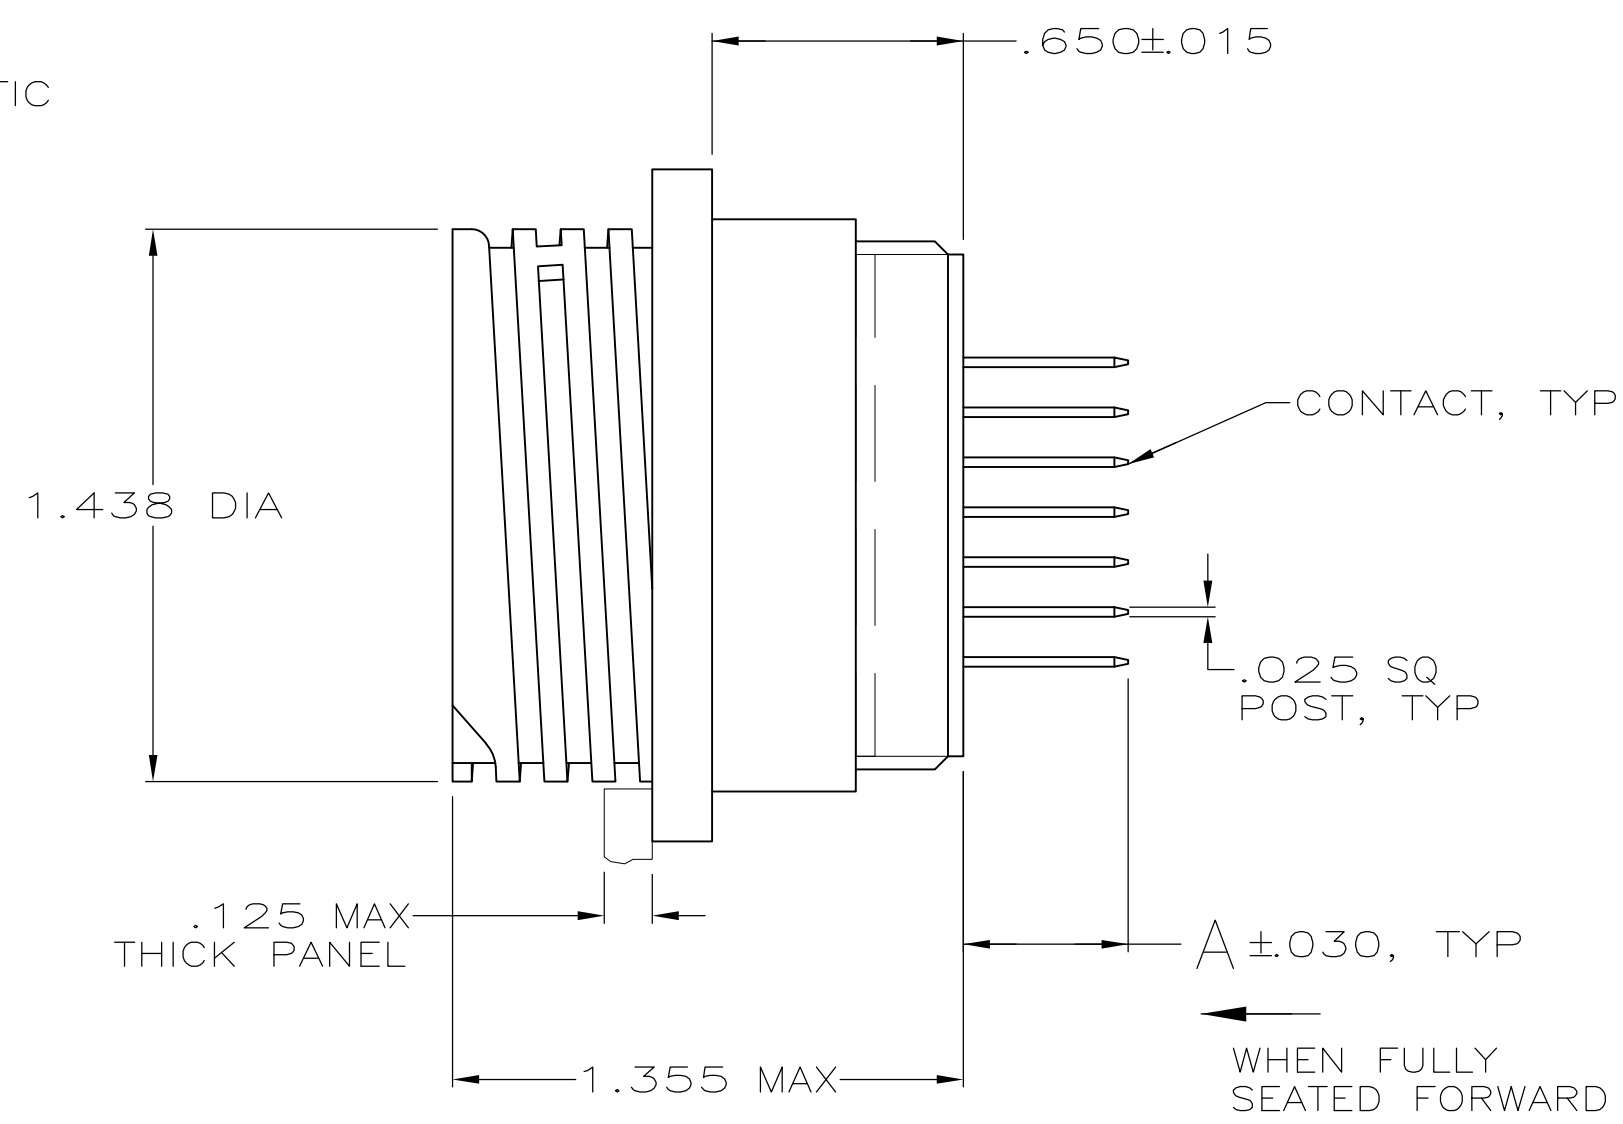


D

C

B

A

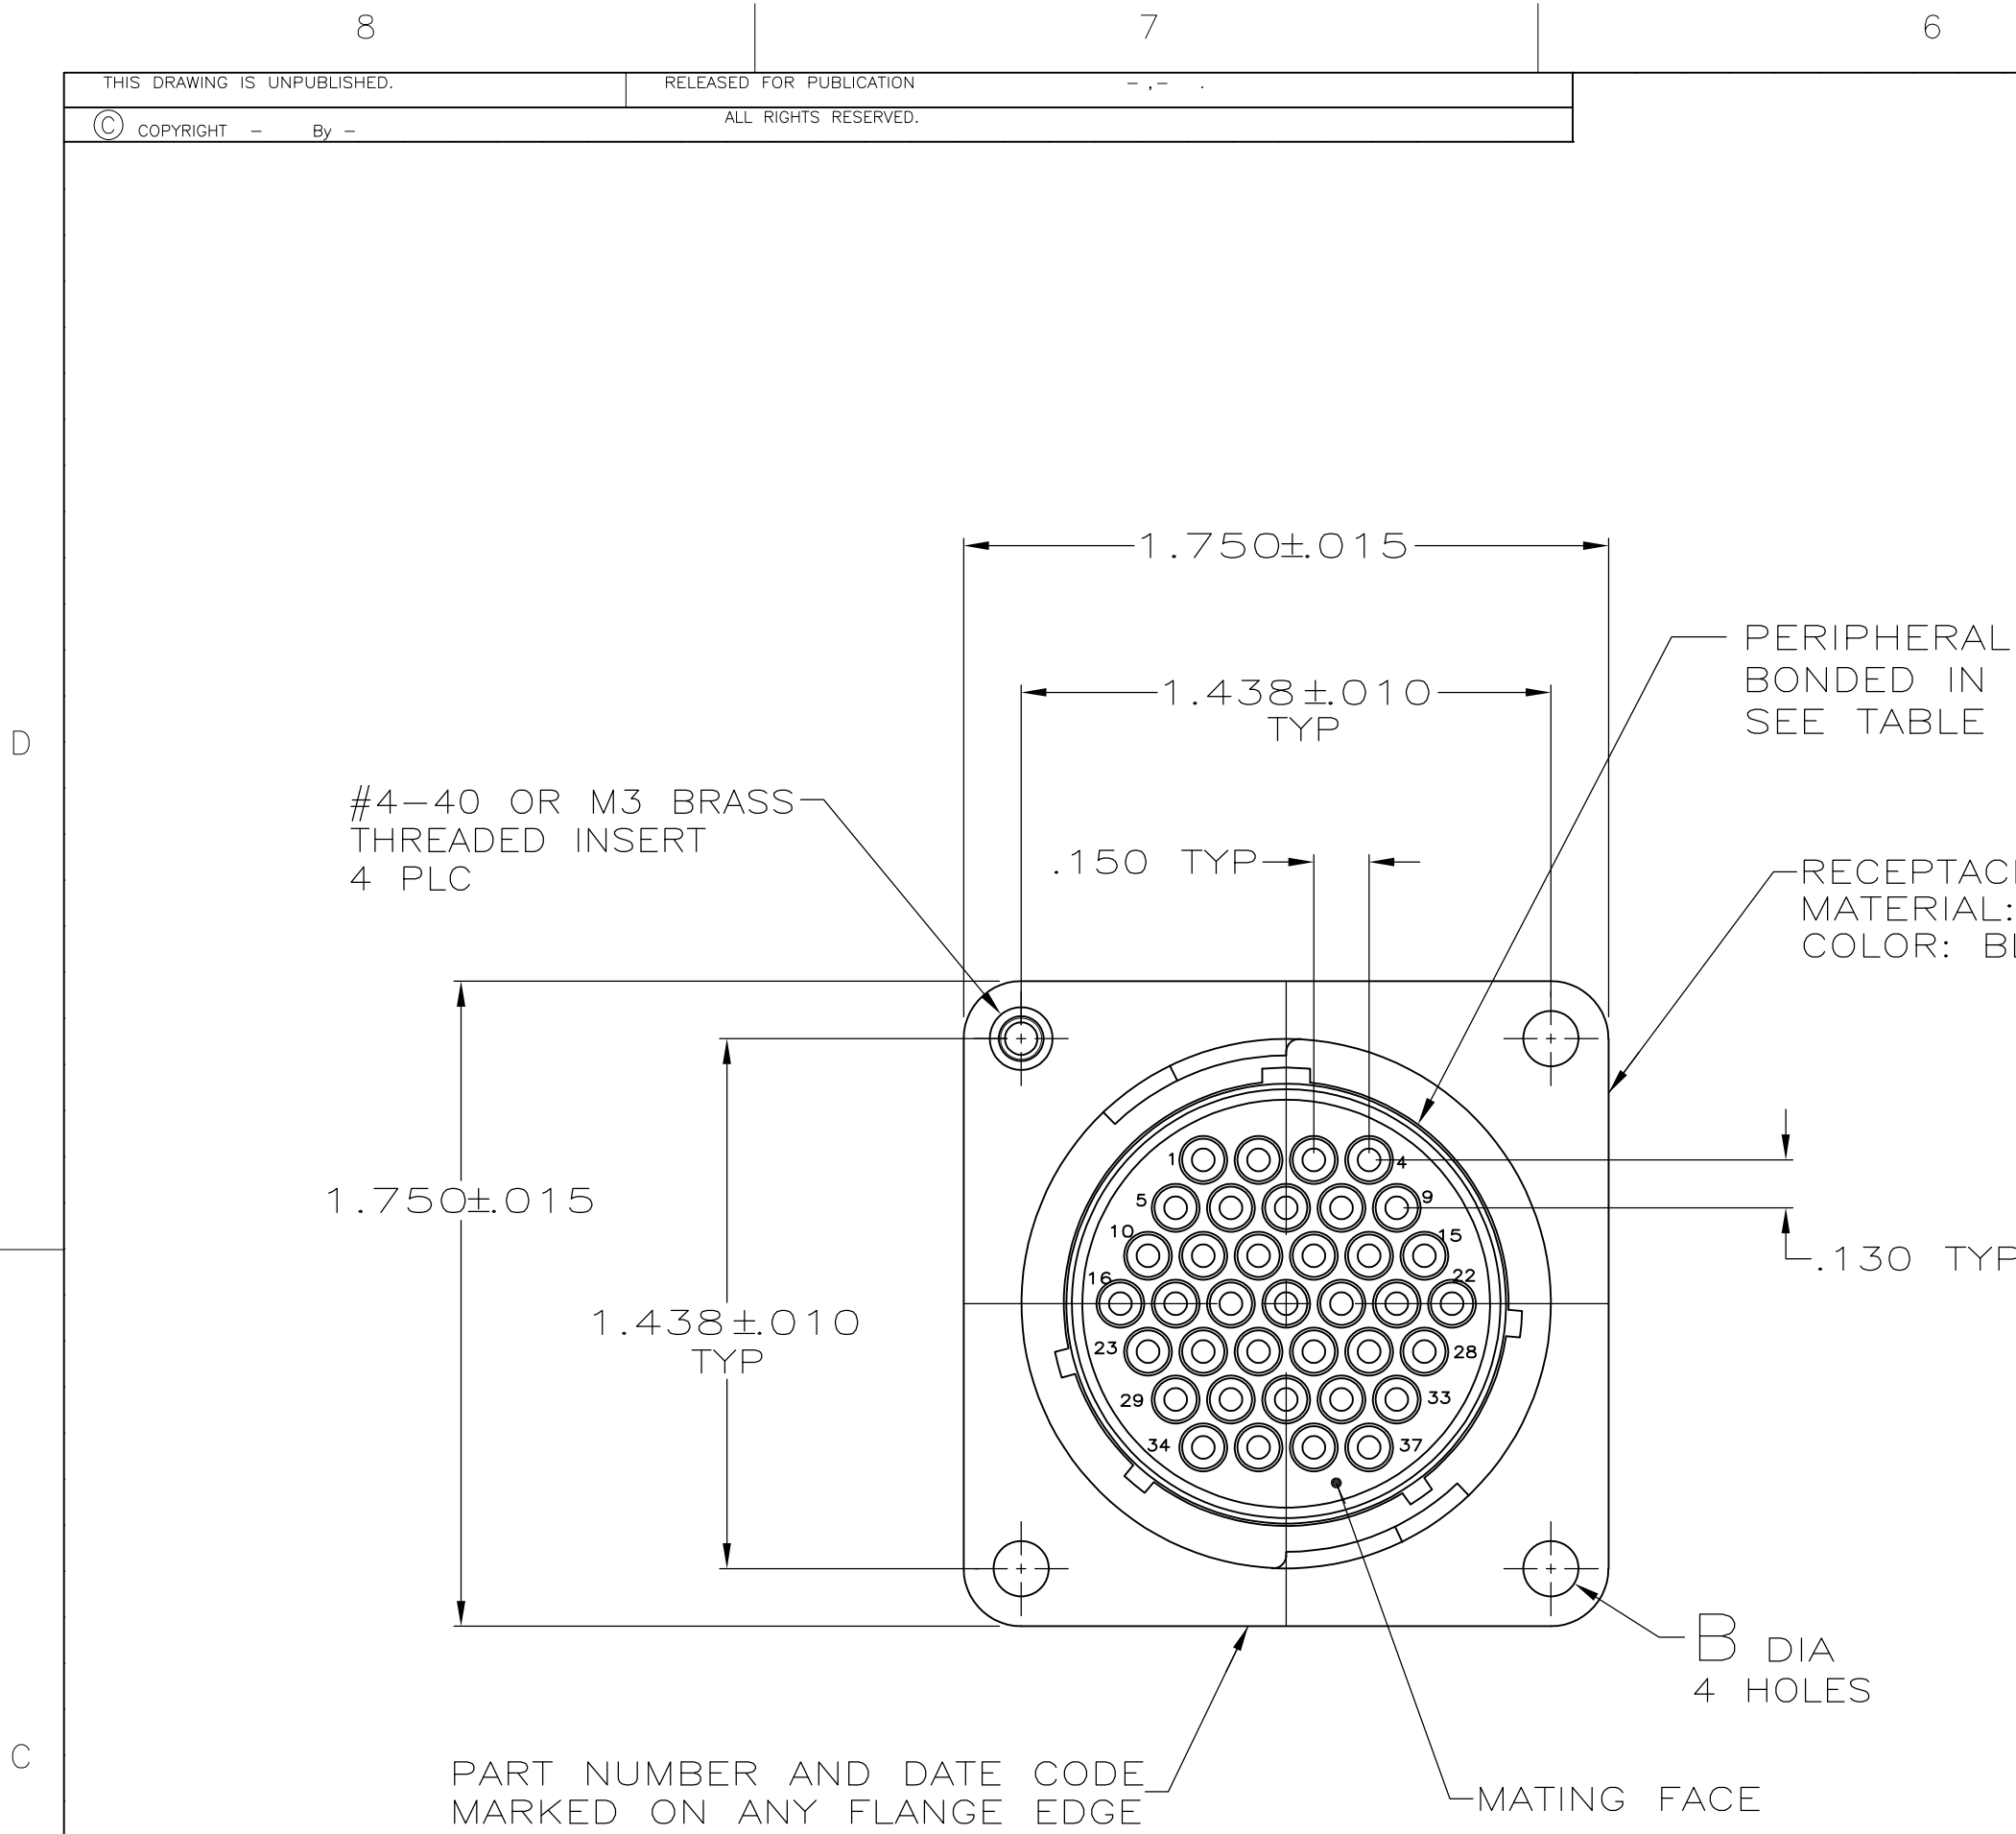

RECOMMENDED P.C. BOARD LAYOUT

- CONNECTOR WILL ACCEPT POSTED TYPE III+ PIN CONTACTS.
- CONTACT BODY: SELECT GOLD OVER NICKEL.
CONTACT POST: TIN-LEAD PER MIL-T-10727 OVER COPPER PER MIL-C-14550A.
- RECOMMENDED PC BOARD HOLE SIZE FOR CONTACT POST: 1.02±0.08[.040±.003] DIA.
- CONTACT BODY: SELECT GOLD OVER NICKEL.
CONTACT POST: TIN OVER NICKEL.
- POSITIONS LOADED WITH CONTACTS: 1-4, 10-17, 19-22, 24, 25, 29, 30, 32, 33.
- POSITIONS LOADED WITH CONTACTS: 1-20, 22-28, 30-37.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.
- CONTACT BODY: TIN OVER NICKEL.
CONTACT POST: TIN OVER NICKEL.
- CONTACT BODY: SELECT GOLD OVER NICKEL.
CONTACT POST: TIN/LEAD OVER NICKEL.
- CONTACT BODY: TIN/LEAD OVER NICKEL.
CONTACT POST: TIN/LEAD OVER NICKEL.

	OBSOLETE	5	NO	YES	YES	—	.170	2-206934-9
	OBSOLETE	5	NO	YES	NO	—	.413	2-206934-8
	PRELIMINARY	5	NO	YES	NO	—	.257	2-206934-7
	OBSOLETE	9	NO	YES	YES	—	.119	2-206934-6
	OBSOLETE	5	NO	NO	NO	.150±.003	.240	2-206934-5
A	7	10	NO	NO	NO	.150±.003	.220	2-206934-3
	OBSOLETE	5	NO	NO	YES	.150±.003	.119	2-206934-2
	OBSOLETE	5	NO	NO	NO	.150±.003	.119	2-206934-1
	OBSOLETE	5	NO	YES	YES	—	.618	2-206934-0
	OBSOLETE	5	NO	NO	NO	.150±.003	.618	1-206934-9
		5	NO	NO	NO	.150±.003	.429	1-206934-8
		5	NO	YES	YES	—	.119	1-206934-7
	OBSOLETE	10	NO	NO	YES	.150±.003	.429	1-206934-5
6		10	NO	YES	NO	—	.618	1-206934-4
		10	NO	YES	NO	—	.220	1-206934-3
	OBSOLETE	11	NO	NO	NO	.150±.003	.429	1-206934-2
		5	NO	NO	NO	.150±.003	.220	1-206934-1
	OBSOLETE	10	YES	NO	YES	—	.119	1-206934-0
		10	YES	YES	YES	—	.119	206934-9
	OBSOLETE	10	NO	NO	NO	.150±.003	.618	206934-7
		10	NO	NO	NO	.150±.003	.429	206934-6
	OBSOLETE	10	NO	NO	NO	.150±.003	.119	206934-5
			NO	YES	NO	—	.220	206934-4
		10	NO	NO	NO	.158±.001	.618	206934-3
			NO	NO	NO	.158±.001	.429	206934-2
		10	NO	NO	NO	.150±.003	.220	206934-1
	CONTACT FINISH	M3 INSERTS	4-40 INSERTS	PERIPHERAL SEAL	B	A	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.GALLUCCI 5-30-91	TE Connectivity	
CIRK W.G.LENKER 4-14-92		NAME		
DIMENSIONS: mm		APVD K. REAVER 4-14-92		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-10024		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		APPLICATION SPEC		
MATERIAL SEE CALLOUT		SIZE A1		
CONTACT: 2		WEIGHT —		
CUSTOMER DRAWING		SCALE 2:1		
SHEET 1 OF 1		REV AG		