
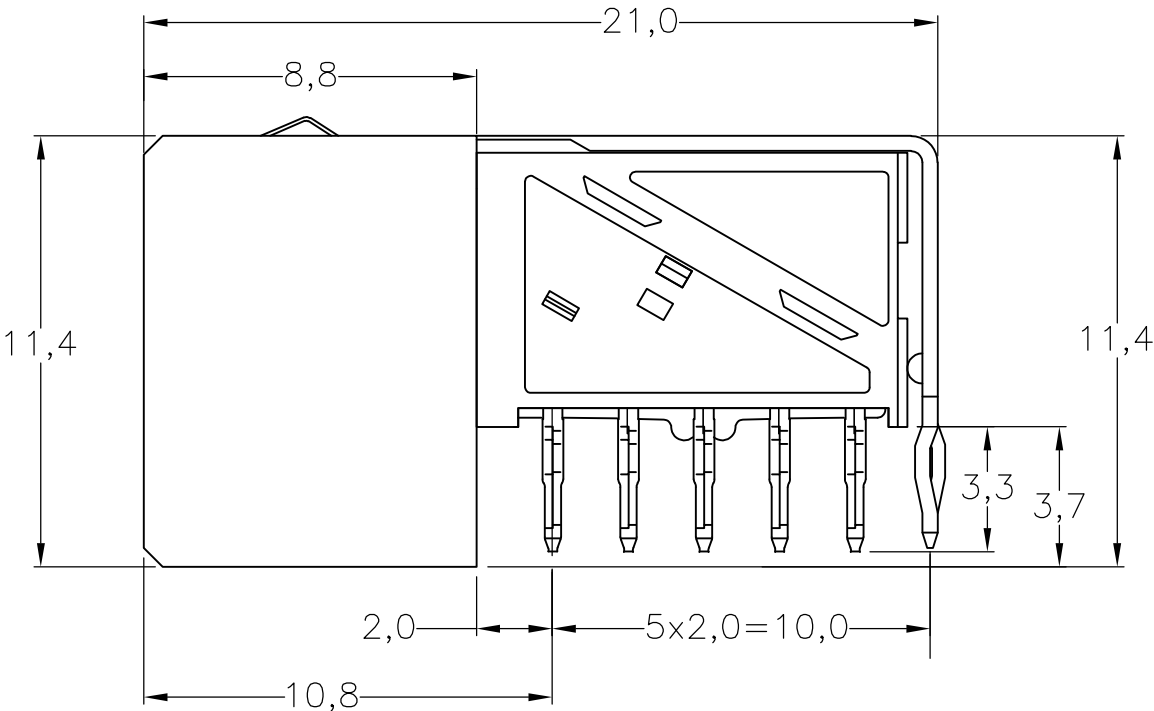



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		K	REVISED PER ECO-13-014710	08NOV2013	SY	FY

- NOTES:
- ⚠ MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL SHIELDS ; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - ⚠ GENERAL CONTACT PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION
PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
 - ⚠ REDUCED CROSS-TALK SHIELD: GOLD FLASH OVER 1,27 µm
NICKEL MIN.
 - ⚠ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR
ON THE FRONT SIDE OR ON THE BACK SIDE.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B,
125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⚠ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - ⚠ PLATED SPOT ONLY ON COMPONENT SIDE, FORMING ONE
CONTACT WITH PLATED THROUGH HOLES OF ROW C
 - ⚠ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
 - 11 BASIC P.N. LOWERSHIELD:338110

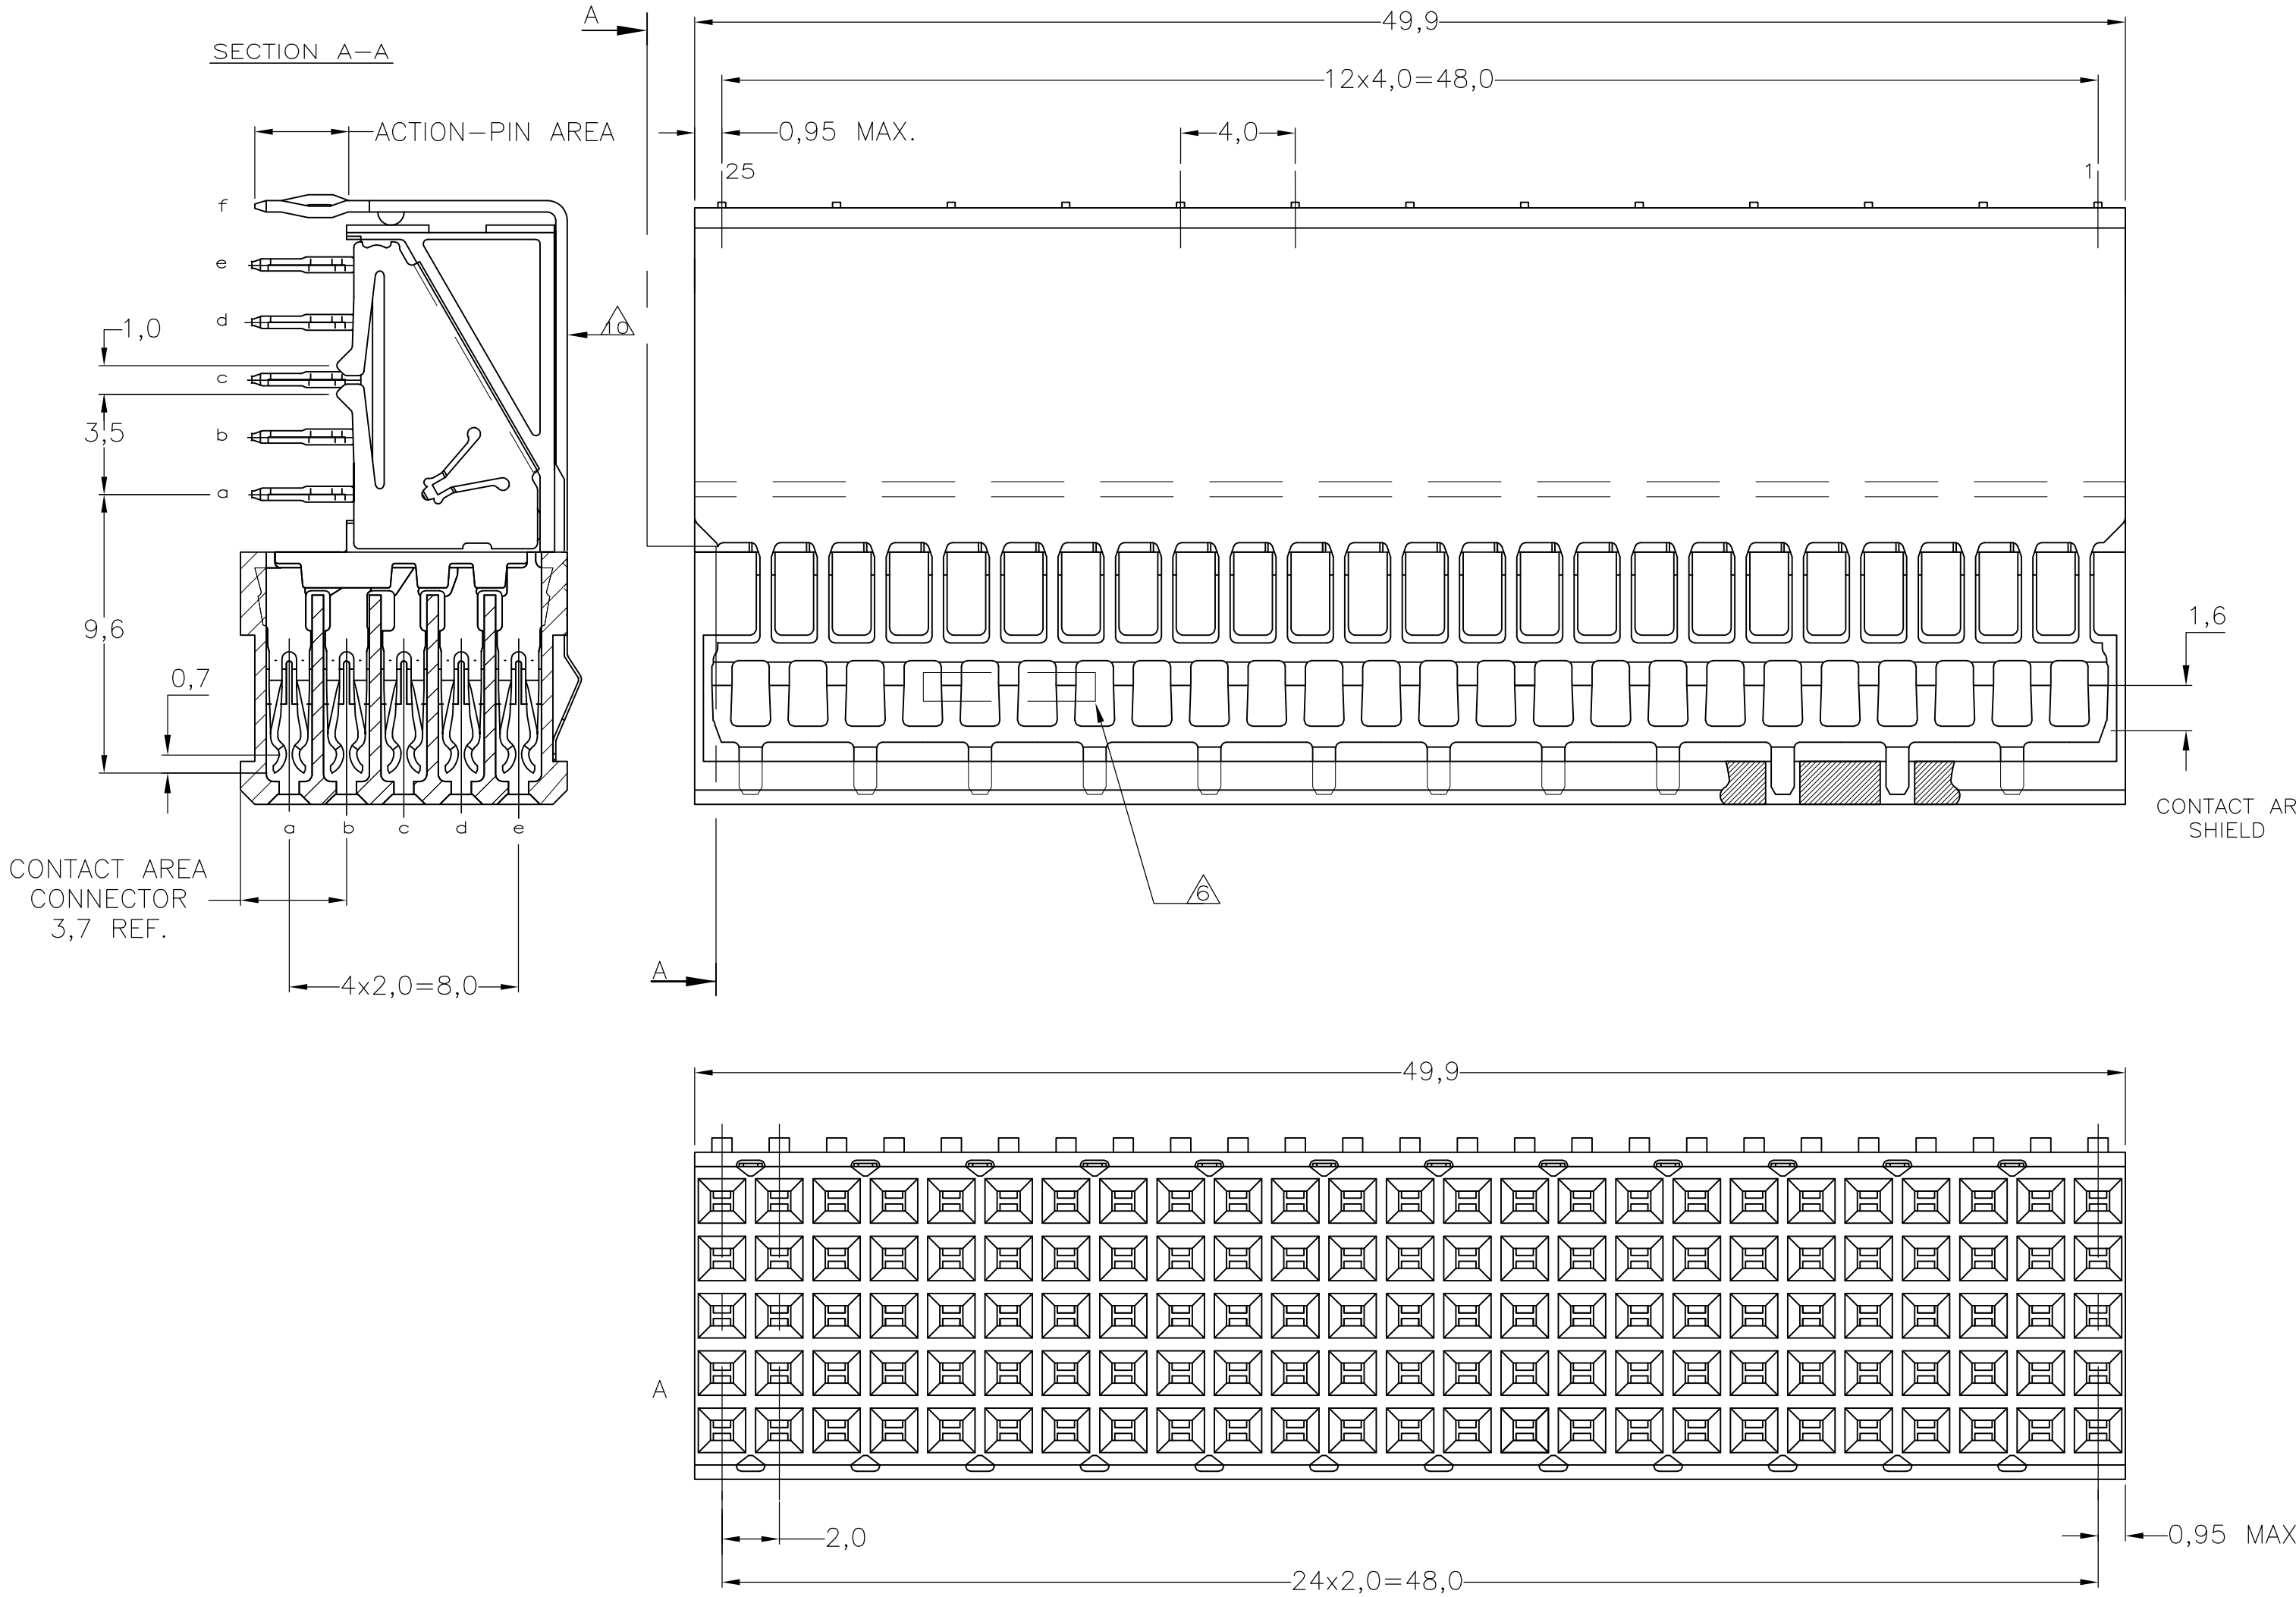

RECOMMENDED P.C.B. HOLE LAY-OUT
COMPONENT SIDE AS SHOWN

SCALE 2,5:1

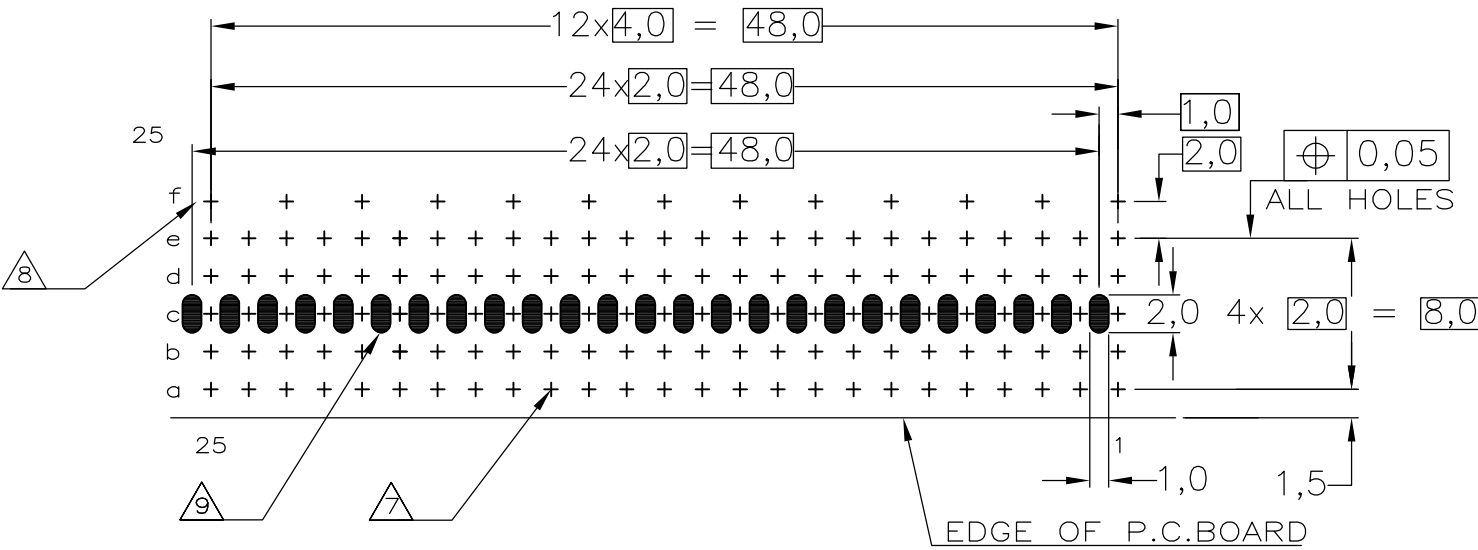

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	25FEB98	 TE Connectivity	
		CHK	25FEB98		
		W.	V.D. HEIJDEN	NAME	
		APVD	23NOV99	F.v KONINGSBRUGGE	
		PRODUCT SPEC		108-19082	
		APPLICATION SPEC		114-19029	
		WEIGHT		A2 00779	
		CUSTOMER DRAWING		SCALE NTS	
				SHEET 1 of 1	
				REV K	