


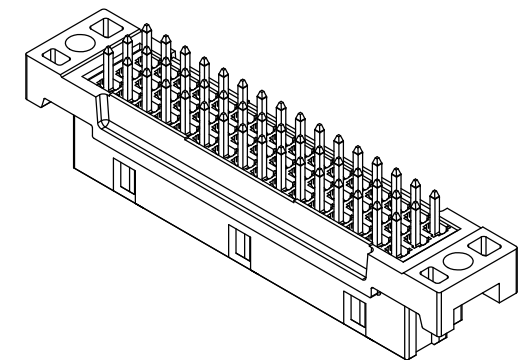
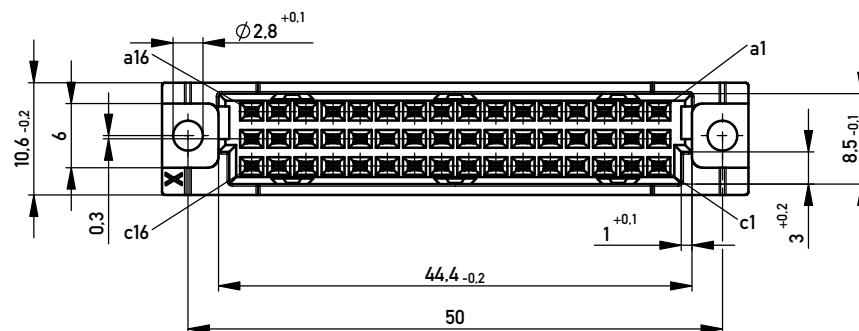



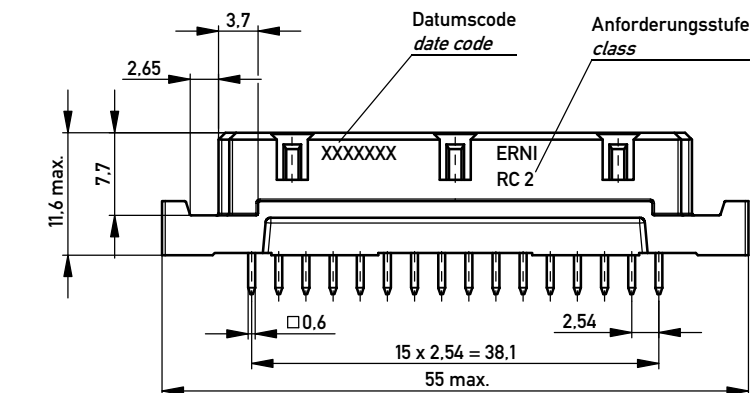

Bestückungsplan / contact layout

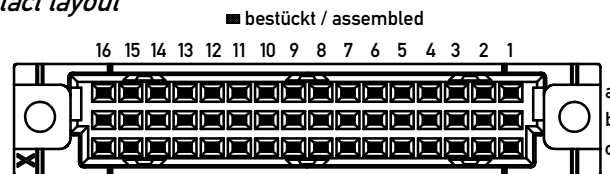

Leiterplatten-Lochbild / PCB drillhole Pattern

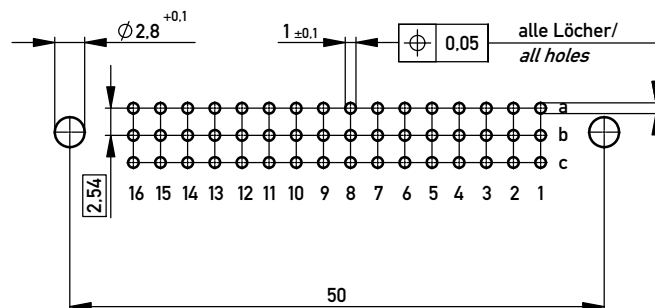

THR=through hole reflow

Isolierwerkstoff / housing material : schwarz / black

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing Information and dimensions per IEC 60 603-2

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
				Federleiste C/2 48 THR Fem. Connector C/2 48 THR	
c		23.08.2013		244810	
Index		Date		I A3	
		www.ERNI.com		Class	
				STVC/2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[244810](#)