


LOC		DIST		REVISIONS					
AD	00	P	LTR	DESCRIPTION		DATE	DWN	APVD	
			2	KEY POSITION UPDATED		26 JUN 2013	KH	DD	

D


C

B

A

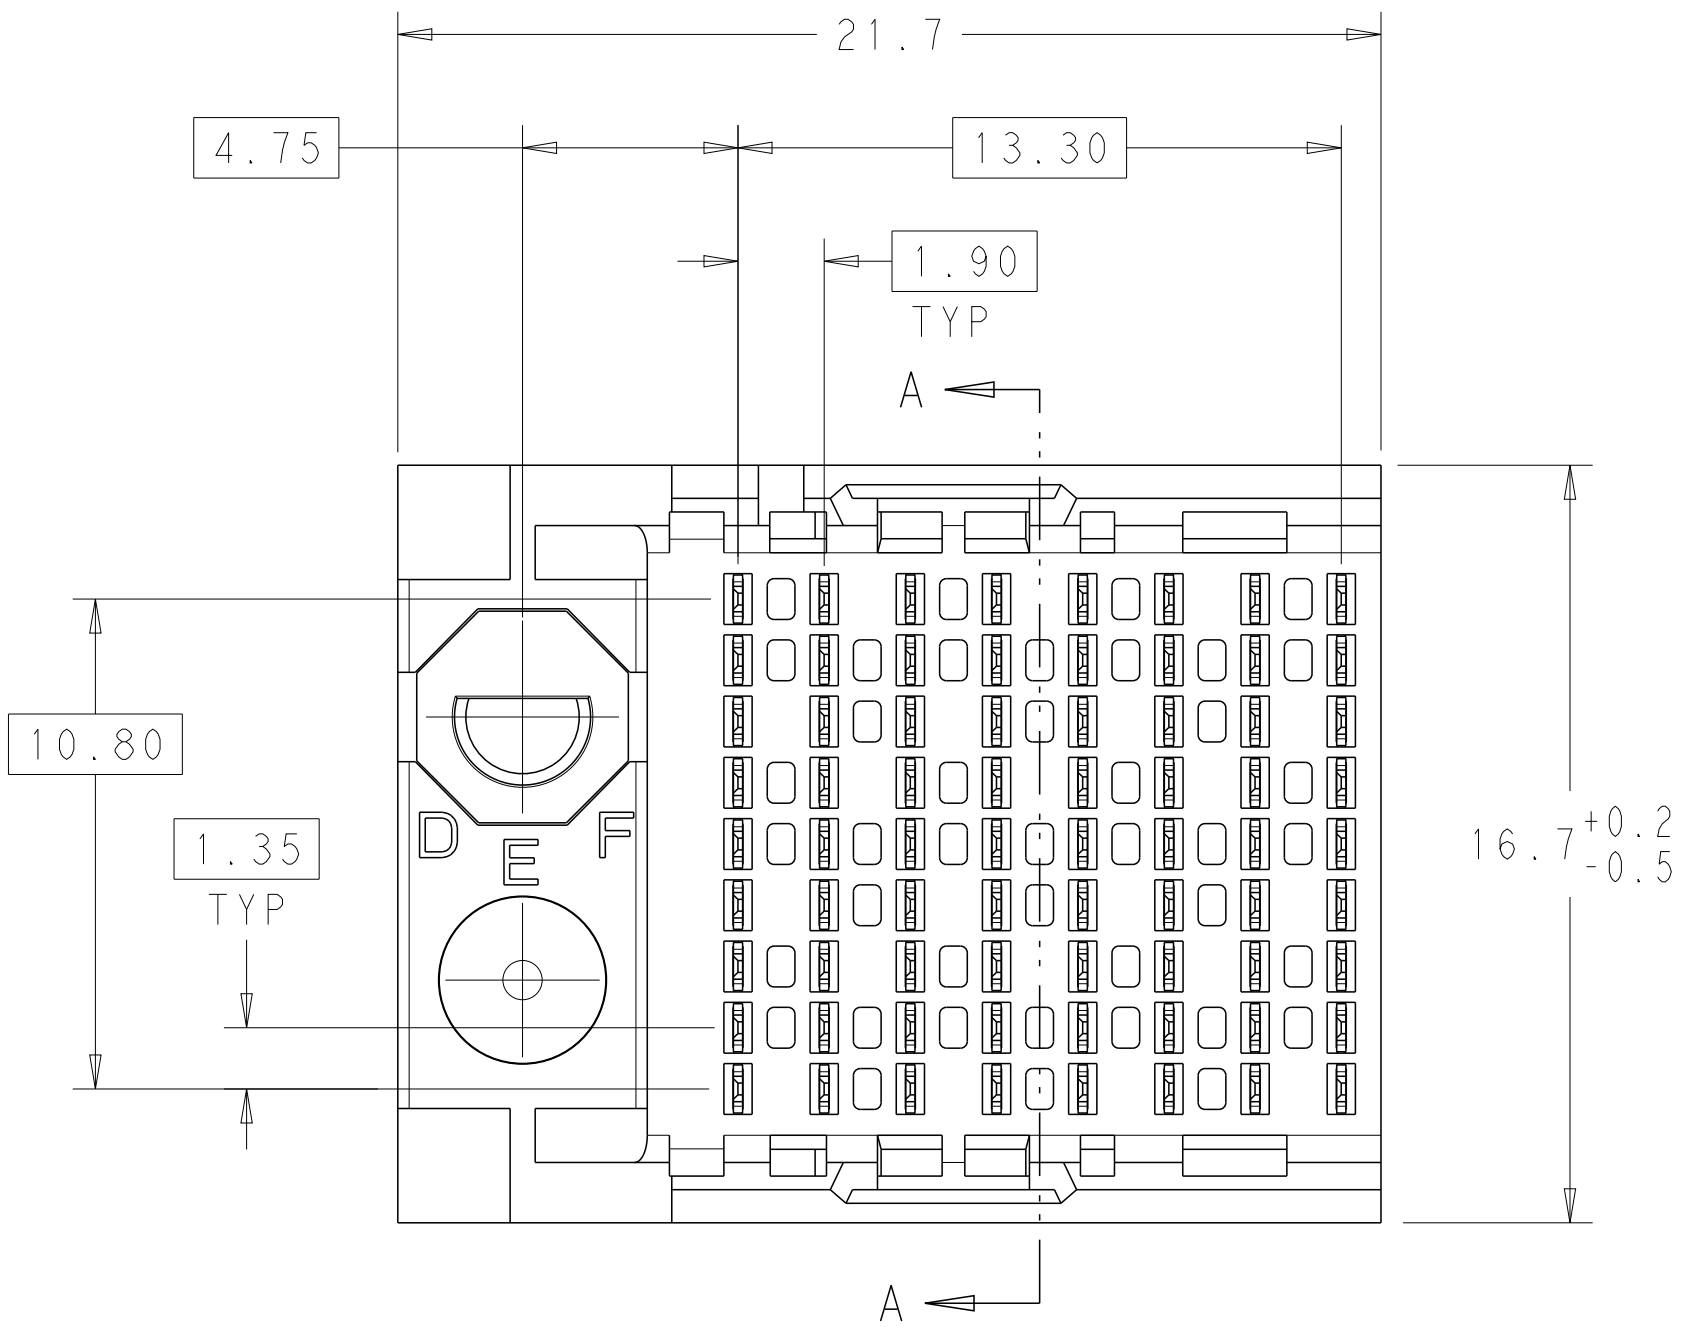

NOTCH DESIGNATES
ROW A

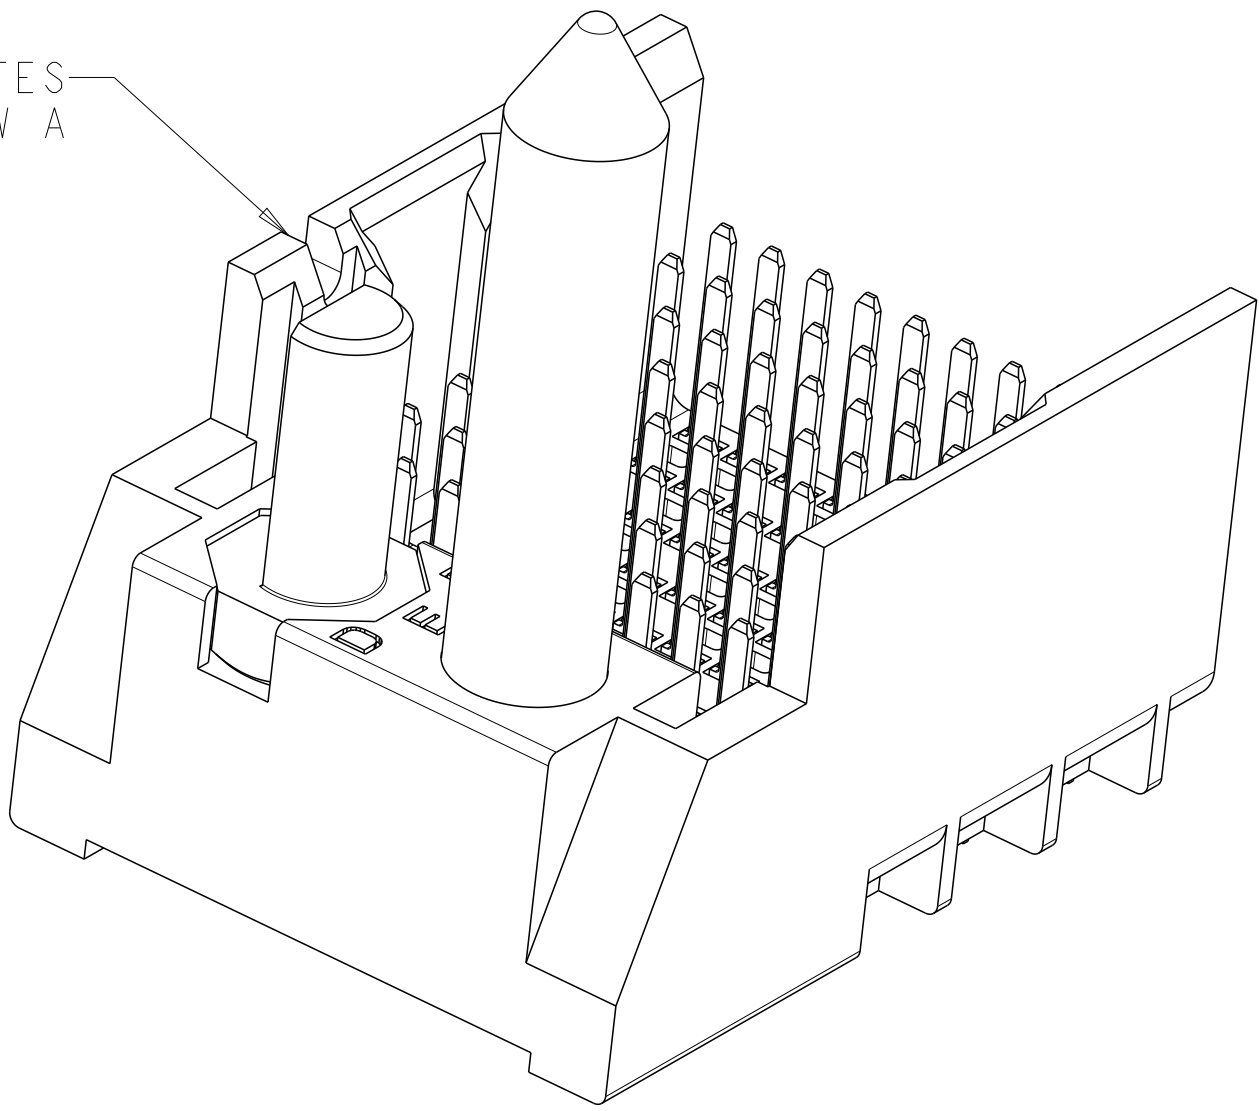

1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.


2 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.

3 FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.

4. SCREWS PACKAGED IN END OF PACKAGING TUBE.

5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.

6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.


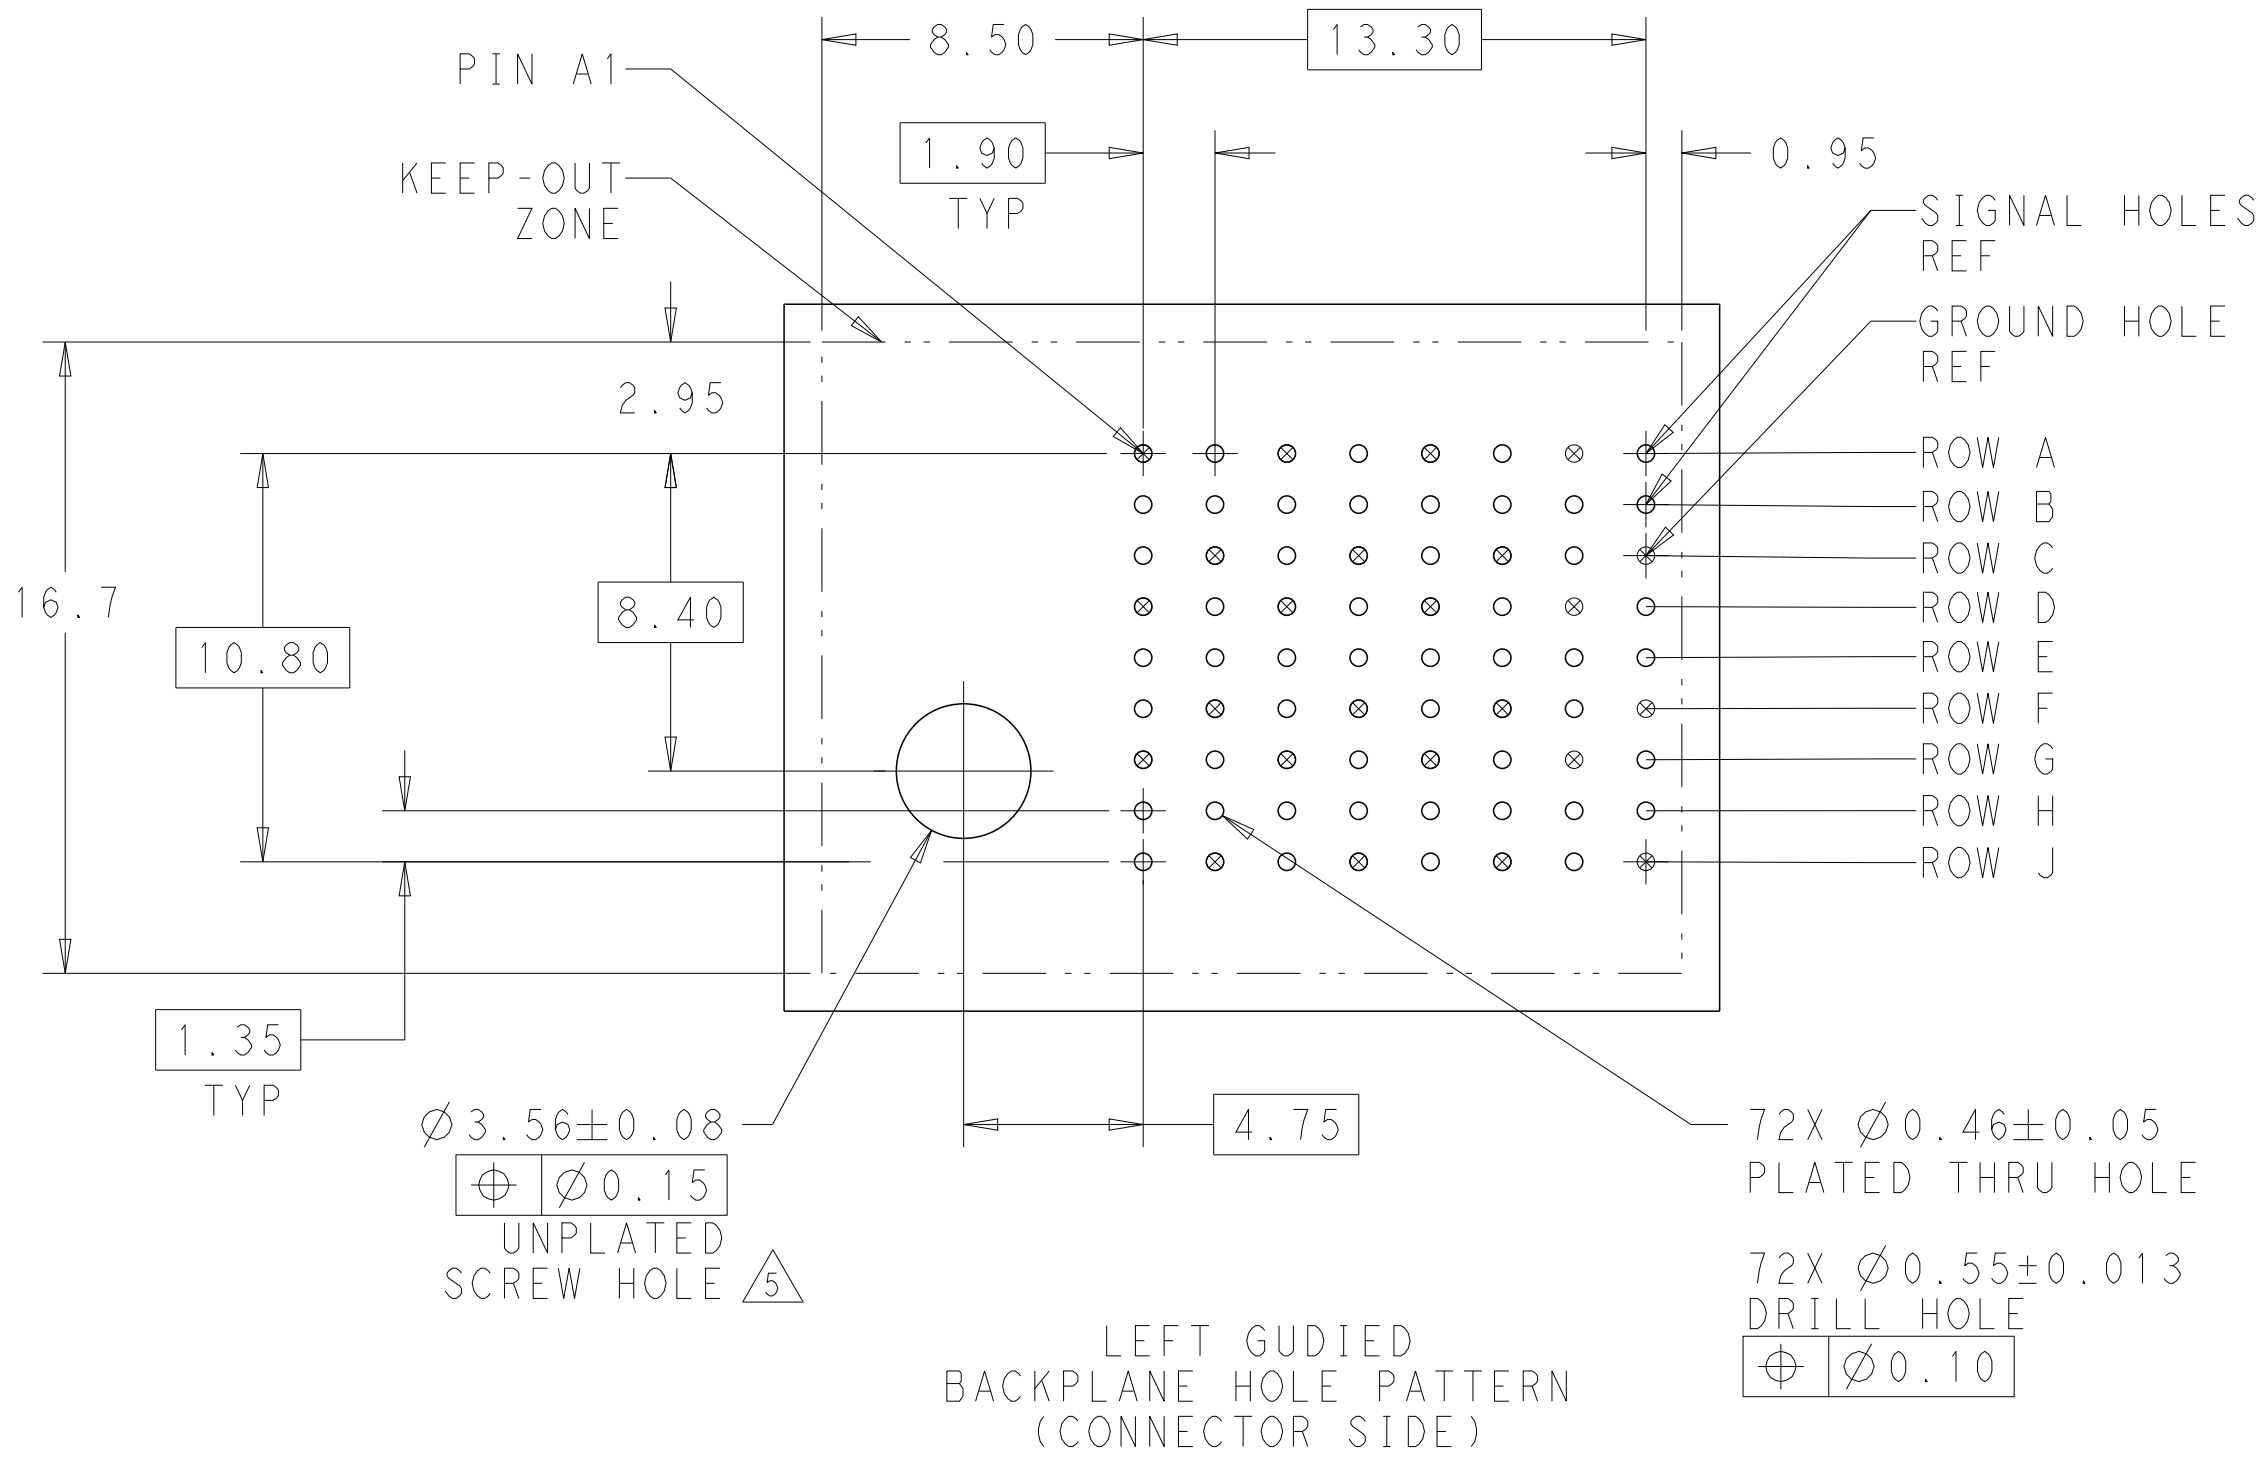


LEFT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

C

B

A

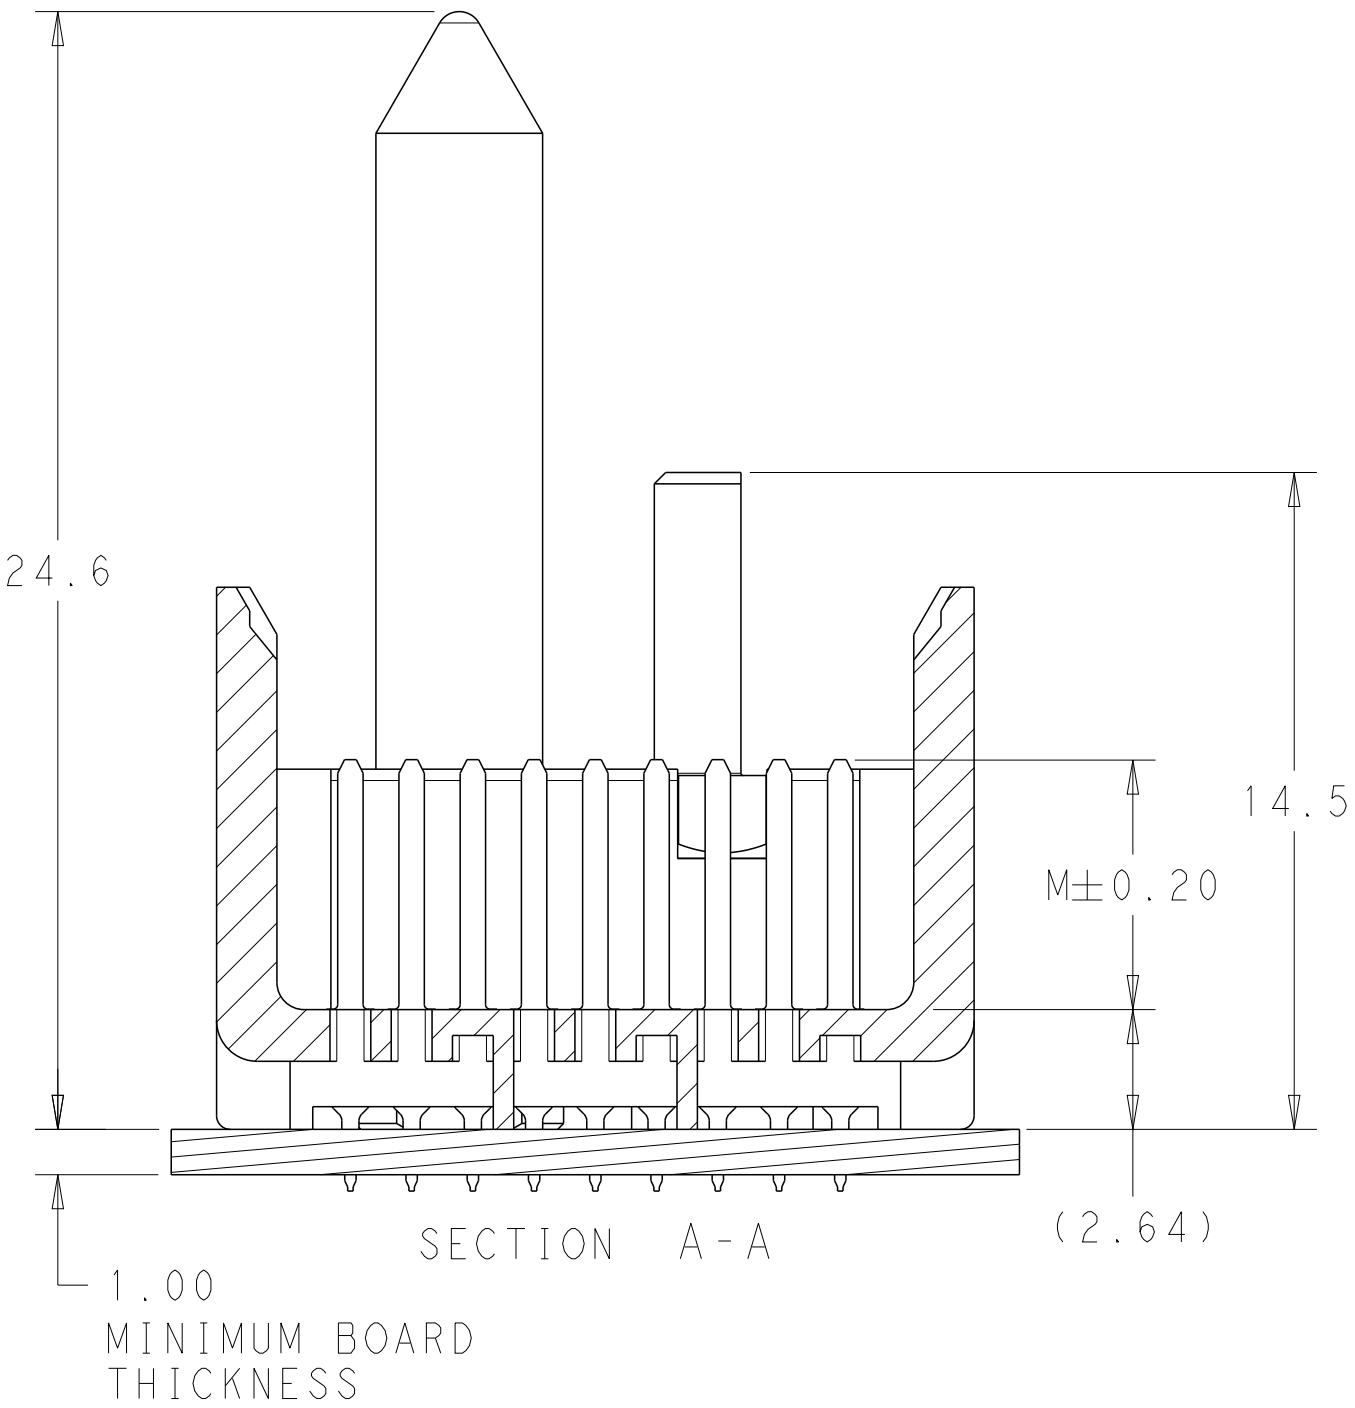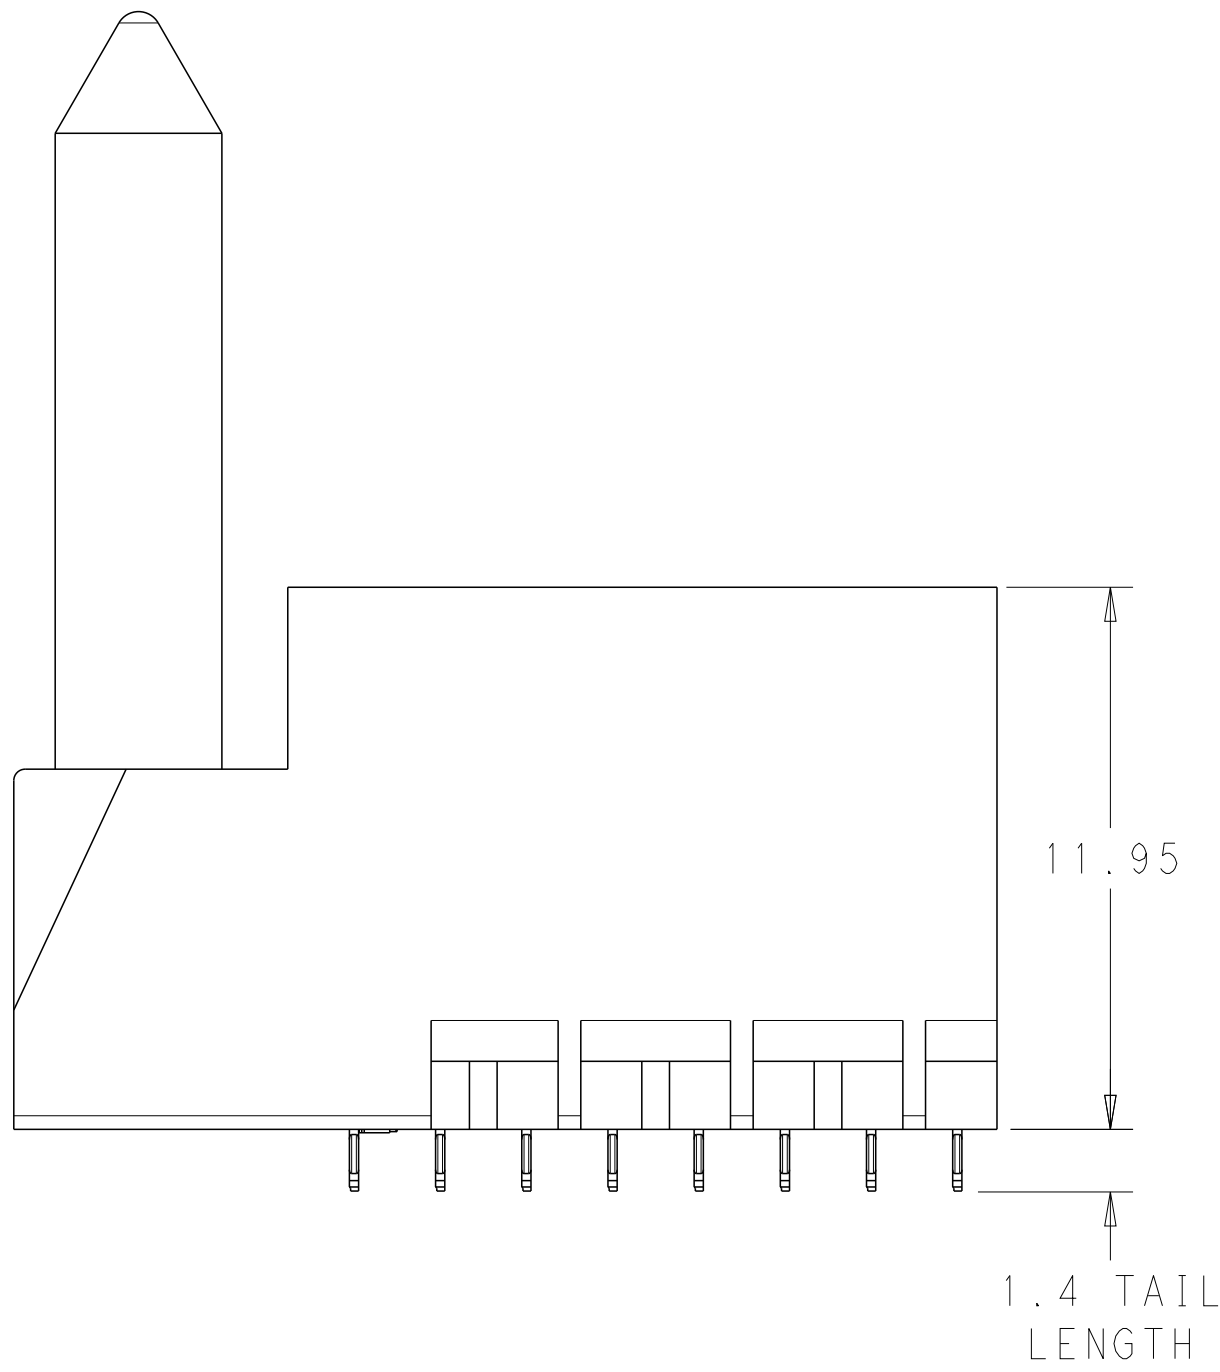

DESIGN APPROVED THIS PRINT IS
PRELIMINARY
TO FIRST PIECE APPROVAL
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: KIRAN HOLAL 24APR2013		 STE Connectivity	IMPACT, 3 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH
DIMENSIONS: mm		CHK: D. DIXON 24APR2013			
		APVD: D. DIXON 24APR2013		NAME: PRODUCT SPEC	SIZE: CAGE CODE: DRAWING NO: A100779C=2227790
				APPLICATION SPEC	
MATERIAL: 		FINISH: SEE TABLE		WEIGHT: -	CUSTOMER DRAWING
				SCALE: 6:1	
				SHEET 1 OF 2	REV 2

