

Quick Reference

Search by part #

Check distributor
part inventory

Products

Browse Products

-By Device -

-By Product Line-

-Attachment Methods

-Interface Materials -

-Accessories -

Useful Links

[MSDS Safety Sheets](#)
[How to Order?](#)
[Find Sales Rep](#)
[Find Distributor](#)
[Sample Request](#)
[Quote Request](#)
[Catalog Request](#)
[Building a Part #](#)
[Part # Cross Ref](#)

Accessories

Standard Mounting Pads

The following Mounting Pads are for use with TQ8

7717-157TG


RoHS  Compliant

(Teflon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.25 (0.010)

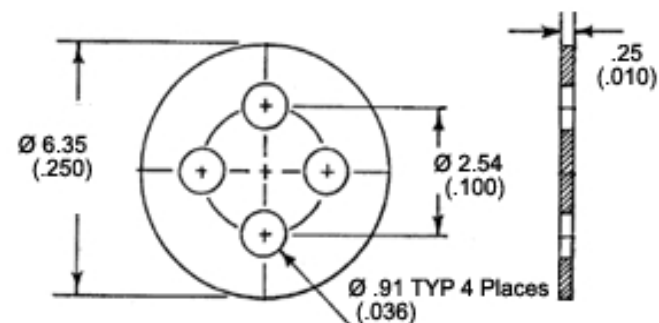

7717-153DAPG


RoHS  Compliant

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.97 (0.038)

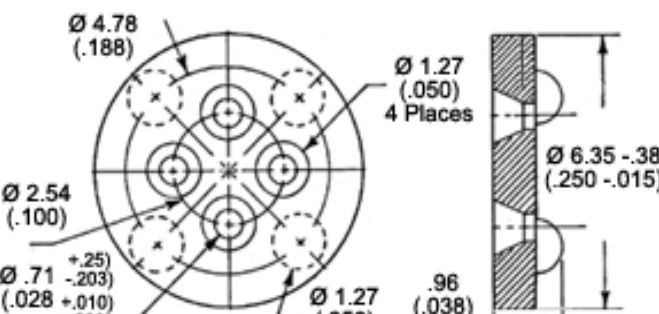

7717-153NG


RoHS  Compliant

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.97 (0.038)

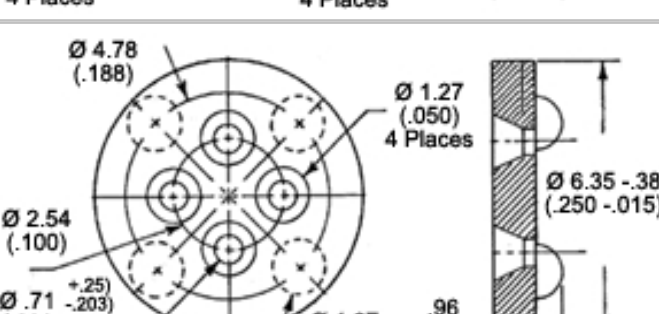

7717-152DAPG


RoHS  Compliant

(DAP)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.14 (0.045)

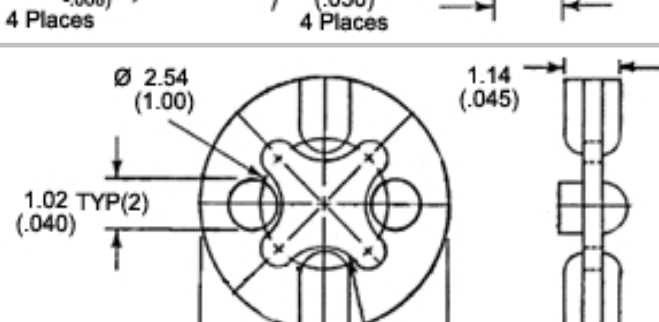

7717-152NG


RoHS  Compliant

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.14 (0.045)

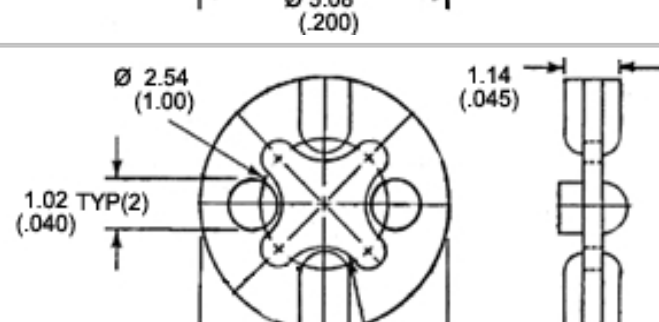

7717-124NG


RoHS  Compliant

(nylon)

Leads: 4

Outside Diameter mm (in): 5.72 (0.225)

Thickness: 0.51 (0.020)

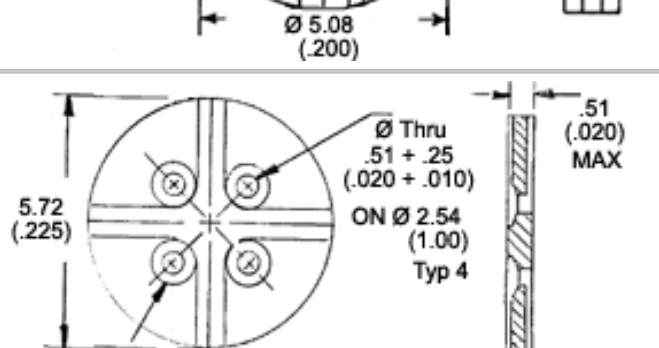

7717-7DAPG


RoHS  CompliantProduct Change Notice 

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 3.18 (0.125)

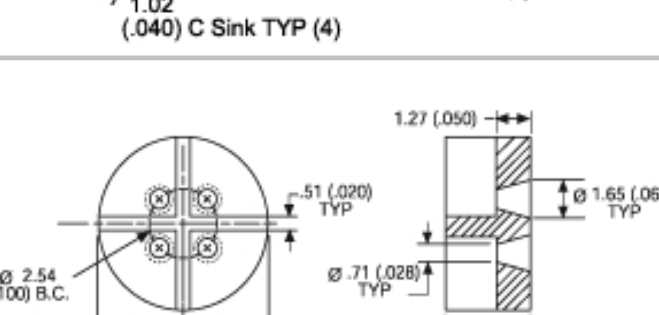

7717-7NG


RoHS  CompliantProduct Change Notice 

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 3.18 (0.125)

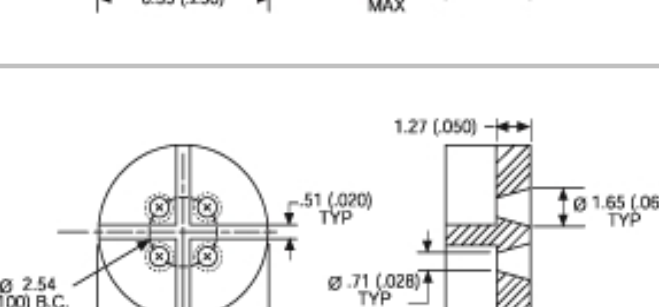

7717-89DAPG


RoHS  CompliantProduct Change Notice 

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 2.03 (0.080)

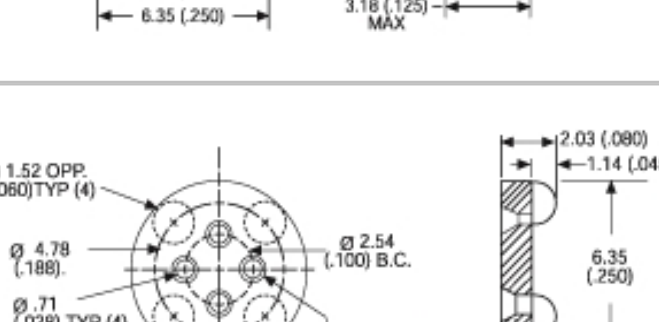

7717-89NG


RoHS  CompliantProduct Change Notice 

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 2.03 (0.080)

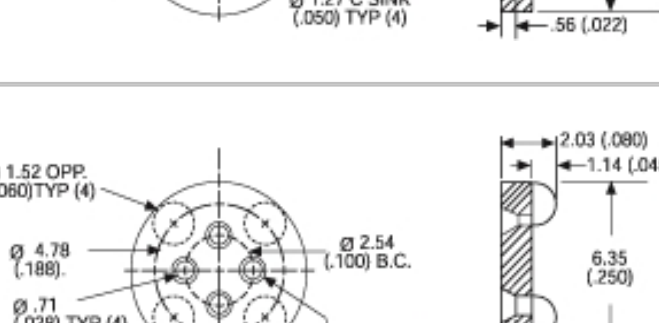

7717-108DAPG


RoHS  CompliantProduct Change Notice 

(DAP)

Leads: 4

Outside Diameter mm (in): 5.26 (0.203)

Thickness: 1.78 (0.070)

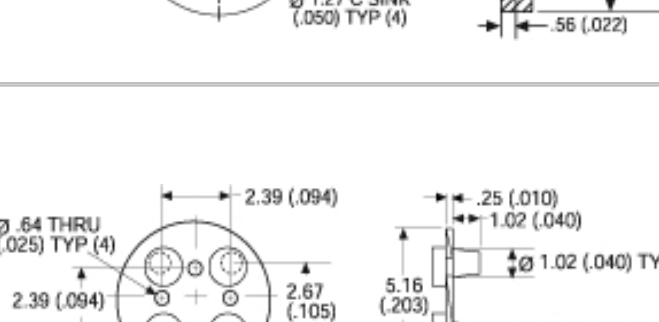

7717-108NG


RoHS  CompliantProduct Change Notice 

(nylon)

Leads: 4

Outside Diameter mm (in): 5.26 (0.203)

Thickness: 1.78 (0.070)

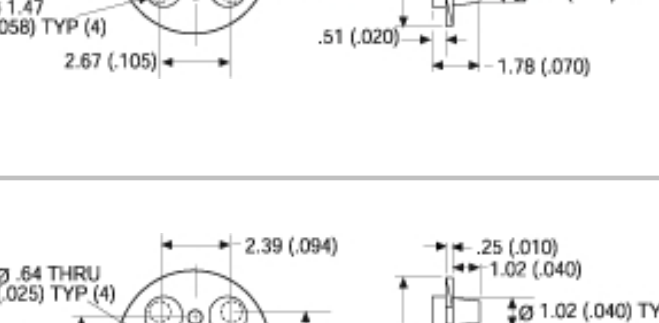

7717-18DAPG


RoHS  CompliantProduct Change Notice 

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 2.54 (0.100)

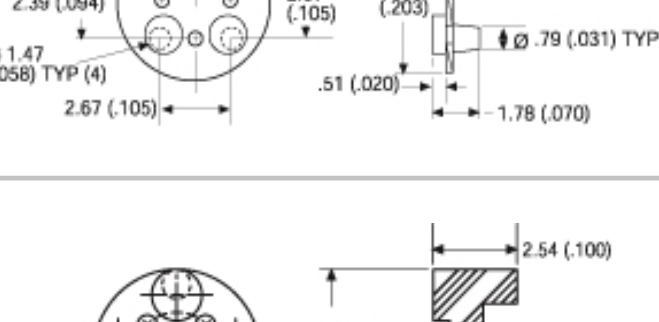

7717-18NG


RoHS  CompliantProduct Change Notice 

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 2.54 (0.100)

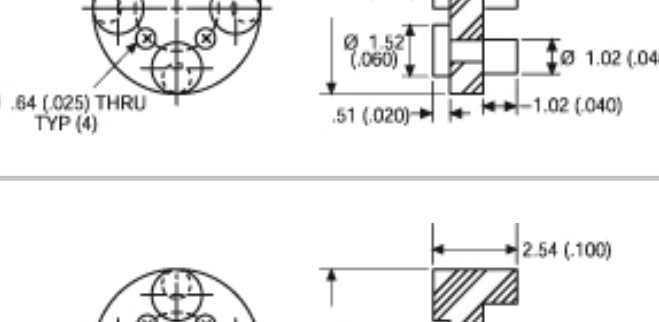

7717-16NG


RoHS  CompliantProduct Change Notice 

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.51 (0.020)

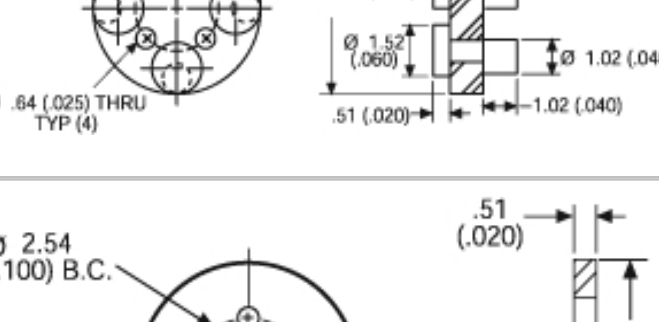

7717-16DAPG


RoHS  CompliantProduct Change Notice 

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.51 (0.020)

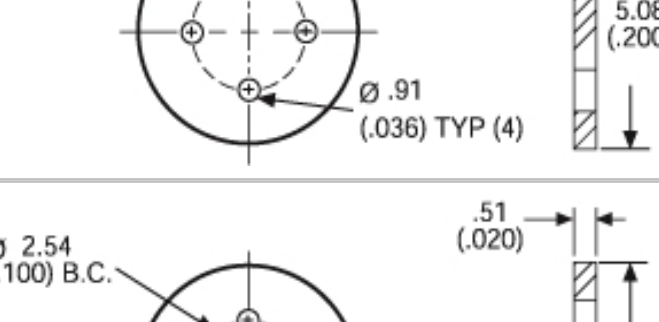

7717-112DAPG


RoHS  Compliant

(DAP)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.64 (0.025)

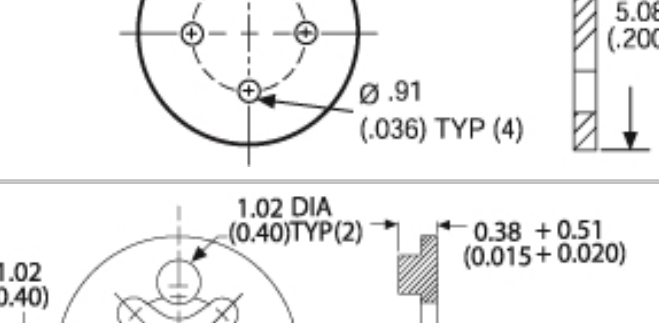

7717-220NG


RoHS  Compliant

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 5.84 (0.230)

Thickness: 2.03 (0.080)

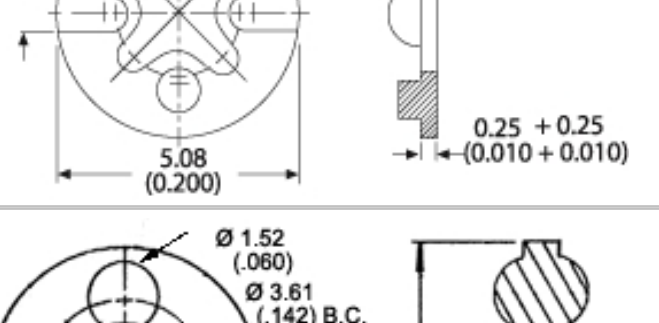

7717-239NG


RoHS  Compliant

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 6.10 (0.240)

Thickness: 457 (0.180)

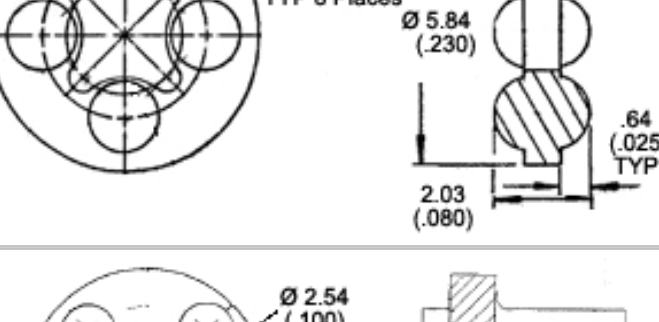

7717-46NG


RoHS  Compliant

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.52 (0.060)

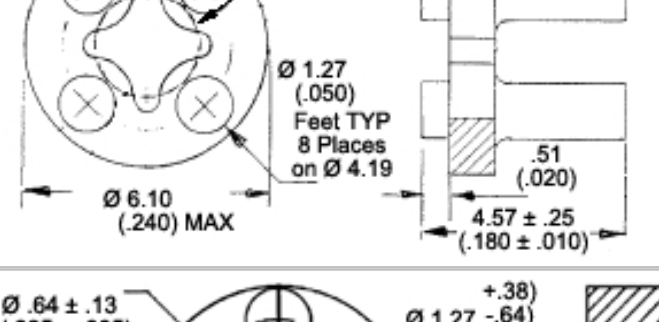

7717-46DAPG

RoHS  Compliant

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.52 (0.060)

