



## Quick Reference

Search by part #

Check distributor  
part inventory

## Products

### Browse Products

-By Device -

-By Product Line-

-Attachment Methods

-Interface Materials -

-Accessories -

## Useful Links

[MSDS Safety Sheets](#)  
[How to Order?](#)  
[Find Sales Rep](#)  
[Find Distributor](#)  
[Quote Request](#)  
[Catalog Request](#)  
[Building a Part #](#)  
[Part # Cross Ref](#)

## Accessories

## Standard Mounting Pads

The following Mounting Pads are for use with TQ8


### 7717-157TG

(Teflon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.25 (0.010)

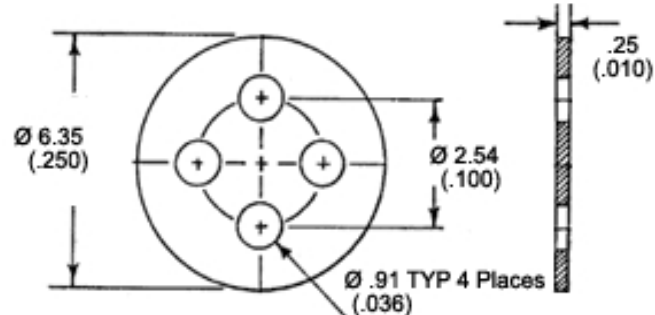


### 7717-153DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.97 (0.038)

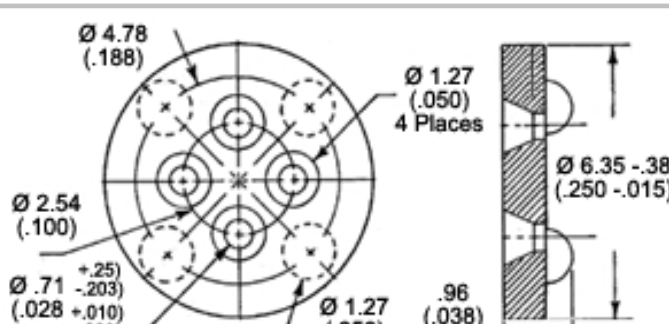


### 7717-153NG

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 0.97 (0.038)

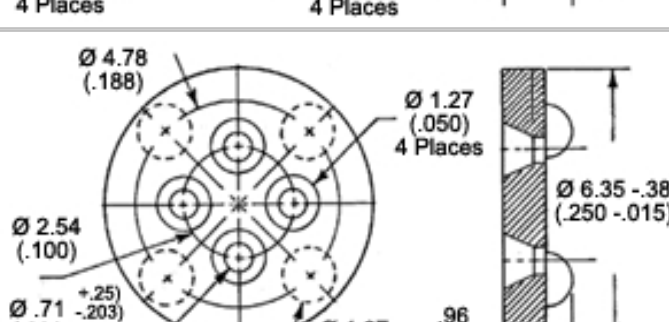


### 7717-152DAPG

(DAP)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.14 (0.045)

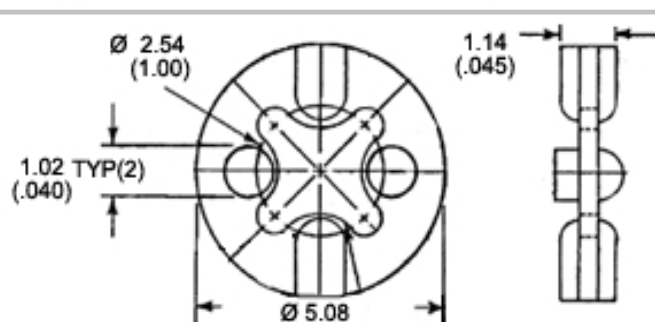


### 7717-152NG

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.14 (0.045)

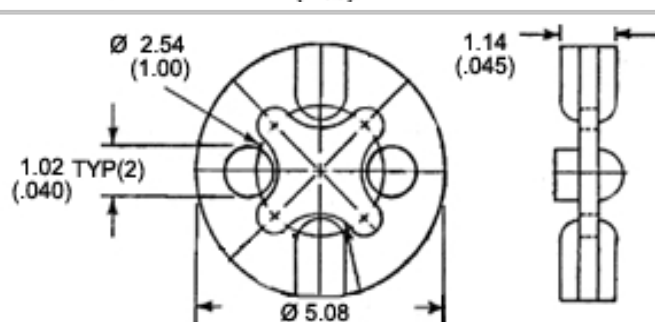


### 7717-124NG

(nylon)

Leads: 4

Outside Diameter mm (in): 5.72 (0.225)

Thickness: 0.51 (0.020)

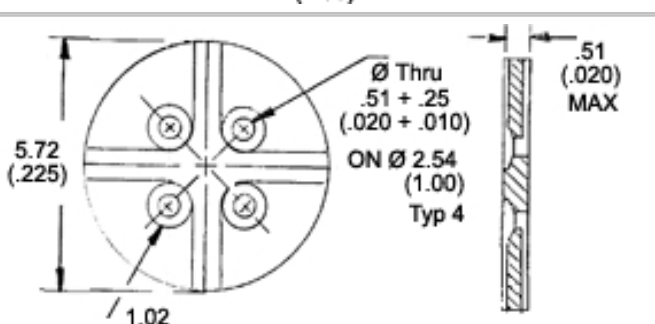


### 7717-7DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 3.18 (0.125)

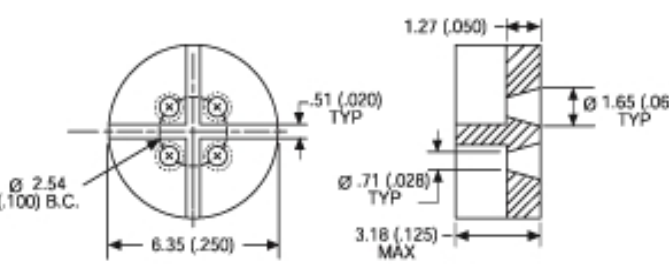


### 7717-7NG

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 3.18 (0.125)

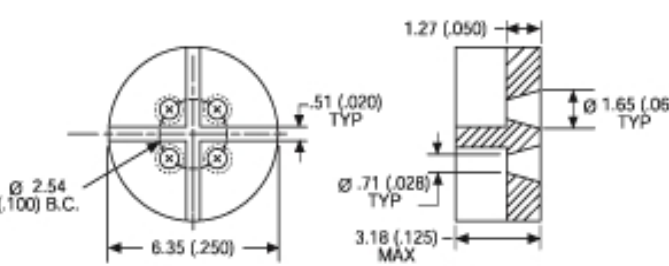


### 7717-89DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 2.03 (0.080)

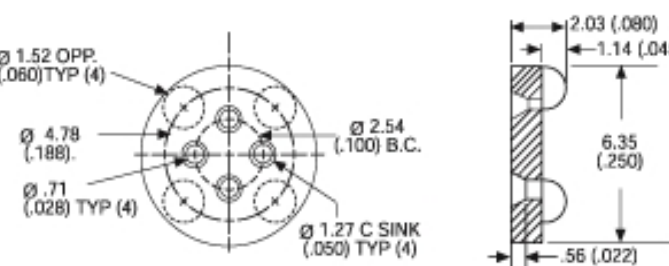


### 7717-89NG

(nylon)

Leads: 4

Outside Diameter mm (in): 6.35 (0.250)

Thickness: 2.03 (0.080)

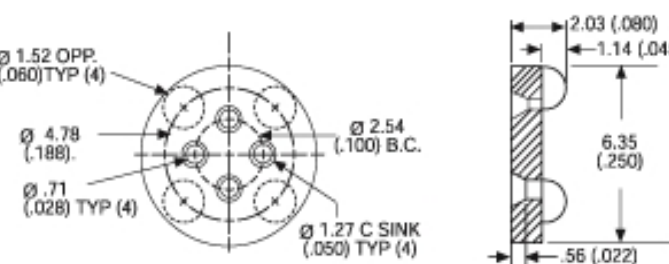


### 7717-108DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 5.26 (0.203)

Thickness: 1.78 (0.070)

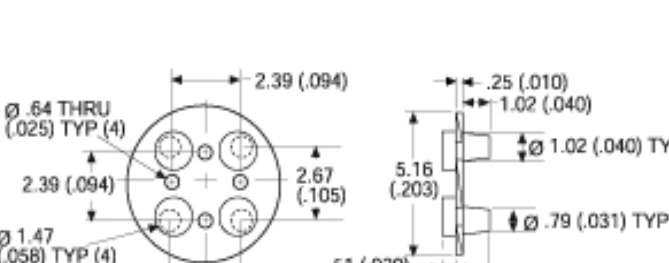


### 7717-108NG

(nylon)

Leads: 4

Outside Diameter mm (in): 5.26 (0.203)

Thickness: 1.78 (0.070)

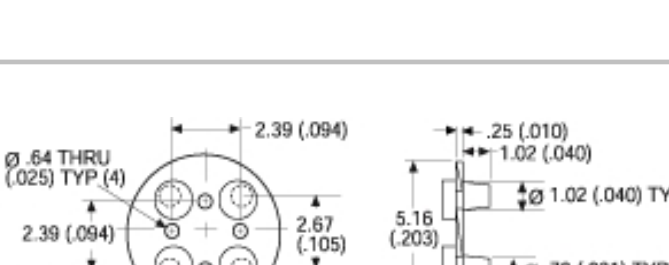


### 7717-18DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 2.54 (0.100)

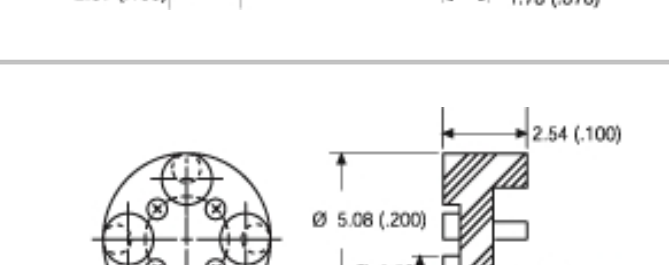


### 7717-18NG

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 2.54 (0.100)

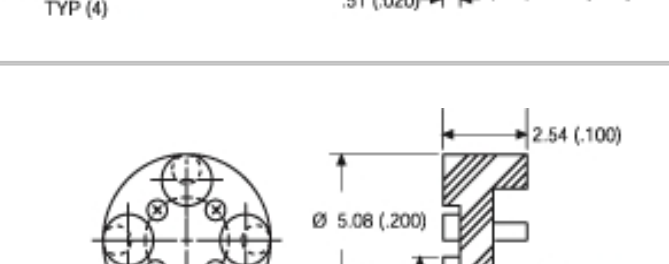


### 7717-16NG

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.51 (0.020)

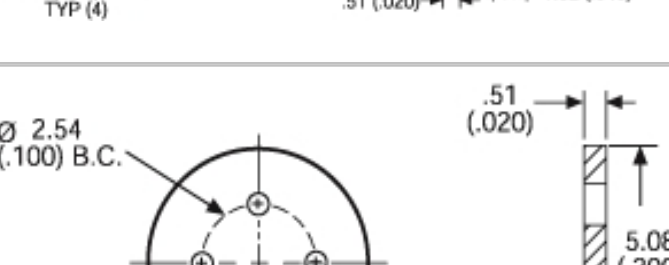


### 7717-16DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.51 (0.020)

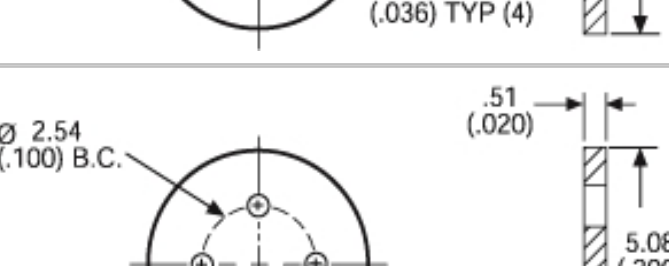


### 7717-112DAPG

(DAP)

Leads: 4-Mar

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 0.64 (0.025)

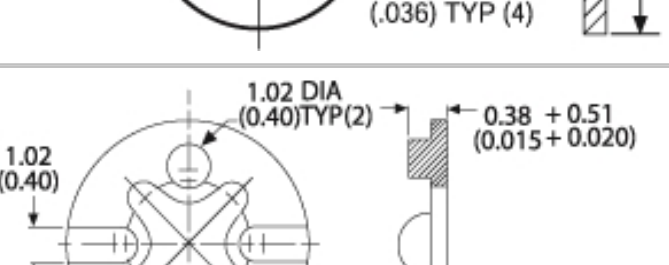


### 7717-220NG

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 5.84 (0.230)

Thickness: 2.03 (0.080)

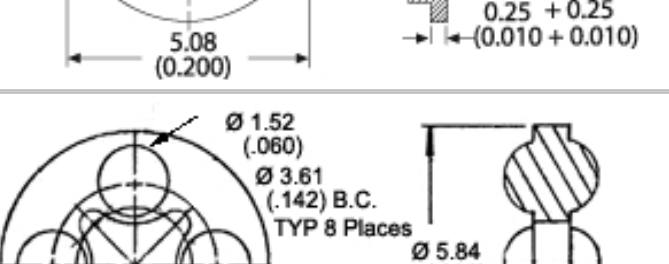


### 7717-239NG

(nylon)

Leads: 4-Mar

Outside Diameter mm (in): 6.10 (0.240)

Thickness: 457 (0.180)

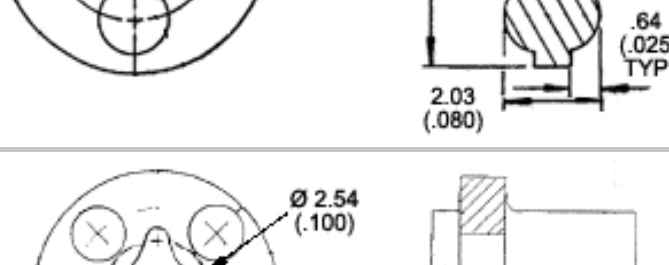


### 7717-46NG

(nylon)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.52 (0.060)

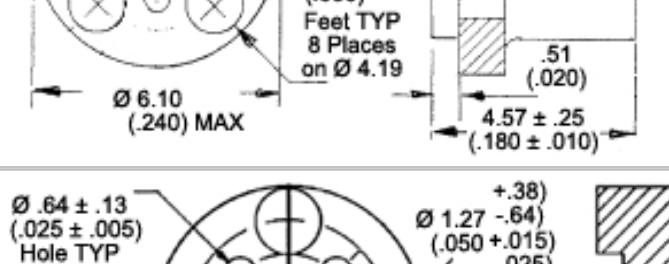

### 7717-46DAPG

(DAP)

Leads: 4

Outside Diameter mm (in): 5.08 (0.200)

Thickness: 1.52 (0.060)

