

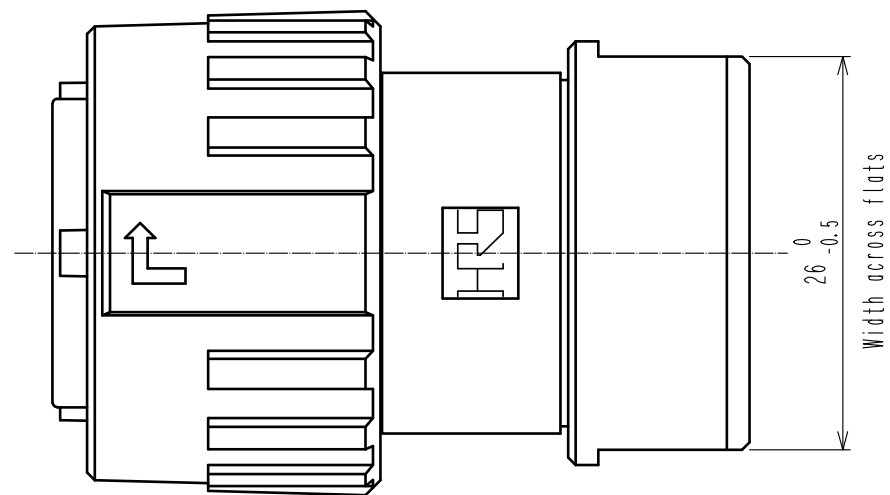
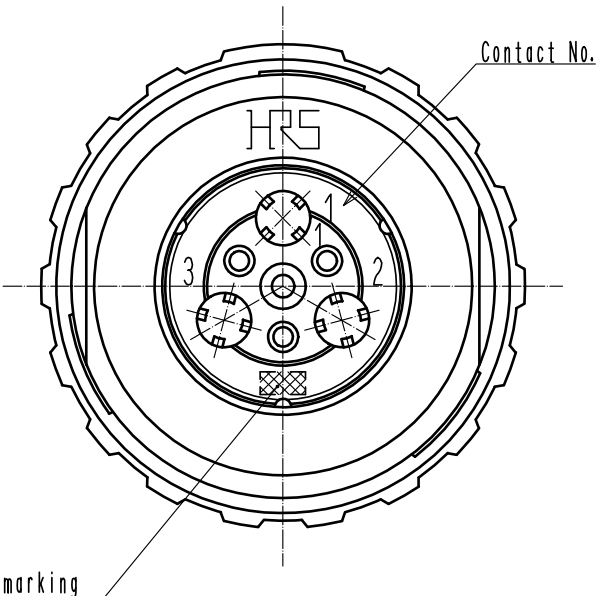


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

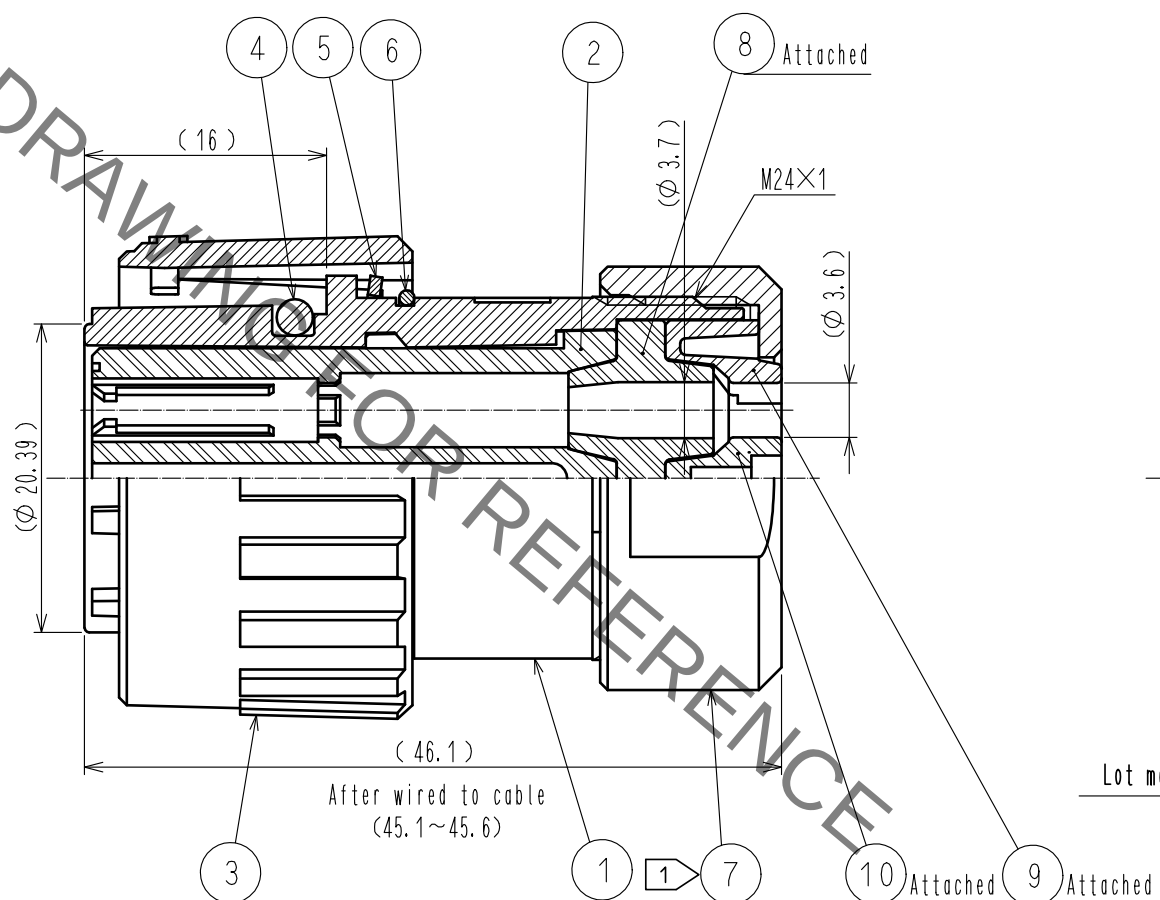


Applicable crimp contact	
HR43-SC-111	CL143-0003-5-00

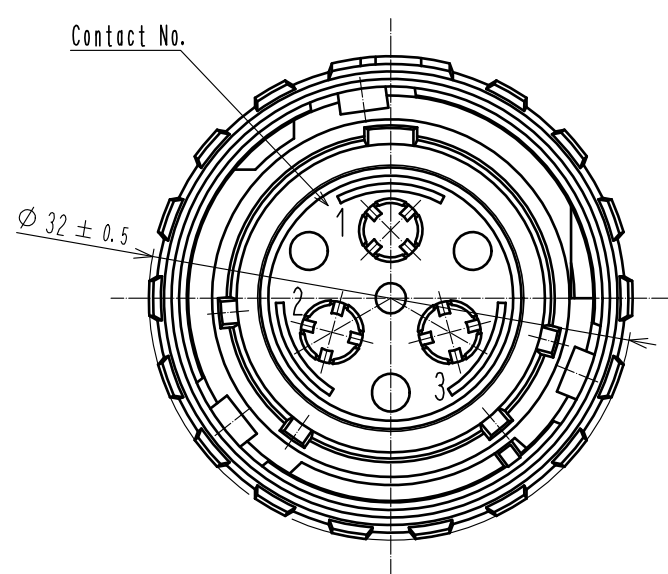

- Notes
- 1 The recommended tightening torque of REF. No. ⑦ : 7 to 7.5 N・m.
Thread locker to the threaded portion of REF. No. ⑦ is recommended to prevent loosening.
The recommended thread locker : LOCTITE 243, HENKEL JAPAN CO, LTD.
 - 2. Rotation examples are shown for REF. No. ①, ③, ⑤ and ⑦.
 - 3. The cable pull and twisting strength, waterproof tightness, and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - 4. Applicable mating connector : HR43-21WBJ-3PC (CL143-0002-2).

5	Stainless steel		10	PBT	Black		
4	Silicone rubber	Black	9	PBT	Black		
3	Aluminum alloy	Chrome plating	8	Silicone rubber	Black		
2	PBT	Black	7	Aluminum alloy	Chrome plating		
1	Aluminum alloy	Chrome plating	6	Stainless steel			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED		HY. KOBAYASHI	16. 04. 01	DRAWING NO.	EDC-117729-00-00		
			CHECKED		HY. KOBAYASHI	16. 04. 01	PART NO.	HR43-21WBP-3SC		
			DESIGNED		TH. KAMEYA	16. 03. 31	CODE NO.	CL143-0001-0-00		
			DRAWN		TH. KAMEYA	16. 03. 31			1	1