




	REVISIONS						
Ī	REV	ECO	DESCRIPTION	DATE	BY	APPR	
	A1		RELEASED DRAWING	Jun-20-2018	Blink	Tommy	

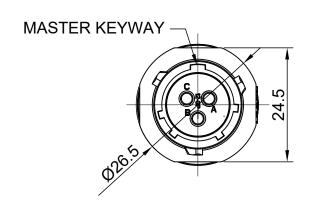

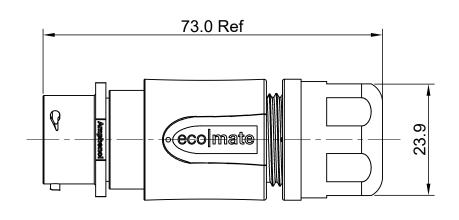

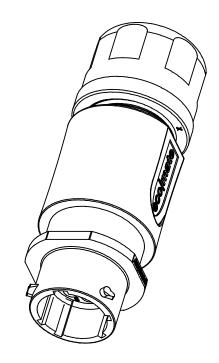

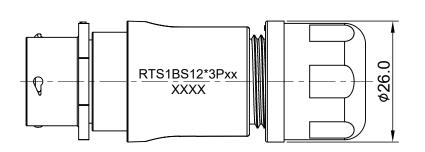



DIMENSION ØA	CABLE OD RANGE
9.5MM	6.0-9.0mm
12.2MM	8.5-12.0mm

	KEY	PART NUMBER		
		-40°C ~ 105°C	-40°C ~ 125°C	
	N	RTS1BS12N3P	RTS1BS12N3P03	

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

1.1 SHELL: THERMOPLASTIC, UL94 V-0.

1.2 INSERT: THERMOPLASTIC, UL94 V-0.

1.3 O-RING: NBR/SILICONE RUBBER.
1.4 BACK SHELL: THERMOPLASTIC, UL94 V-0.

1.5 CLAMP NUT: THERMOPLASTIC, UL94 V-0.

1.6 CLAMP RING: THERMOPLASTIC, UL94 V-0.

1.7 CABLE SEAL: EPDM.

2. SPECIFICATIONS:

2.1, RATED CURRENT: 13A (MAX).

2.2, RATED VOLTAGE: 600V(AC/DC).

2.3, OPERATING TEMPERATURE: SEE TABLE.

2.4, DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE@2500 VOLTS AC.

2.5, INSULATION RESISTANCE: 5000 MEGOHMS MIN.

2.6, IP-CLASS: IP67 AND IP69K IN THE MATED CONDITION.

2.7, MATING CYCLES DURABILITY: 500 CYCLES MIN.

2.8, RoHS COMPLIANT.

3. SUITABLE CONTACTS: 16# CONTACT.

4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

5. ADD LOCTITE TO RETAIN BACKSHELL DURING UN-MATING AND TO PROVIDE ADDITIONAL PROTECTION AGAINST VIBRATION.

QUANTITY PART NUMBER DESCRIPTION ITEM MATERIALS LIST SIGNATURES DATE Amphenol All dimensions are in met
 Tolerances are as follows: Blink Jun-20-2018 1 PL DEC ±0.30 | Fractions ±1/6-2 PL DEC ±0.15 | Angles ±1° 3 PL DEC ±0.08 | Sine Systems - www.amphenol-sine.com Tod Jun-20-2018 44724 Morley Drive Clinton Township, MI 48036 Jun-20-2018 Tommy MATERIAL SPECIFICATIONS ECO-MATE, RECPTACLE, BACK SHELL, SIZE 12, 3 POS,PIN. HIS DRAWING IS SUPPLIED FOR IFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DAT. SHOWN HEREON ARE THE PROPERTY OF B c-RTS1BS12*3Pxx A1 THE AMPHENOL CORPORATION. NO RIGHT OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL CALE: NONE

ECO-MATE,RECPTACLE,BACK SHELL,SIZE 12, 3 POS,PIN.

RTS1BS12*3Pxx

REV: A1 SH:

->