

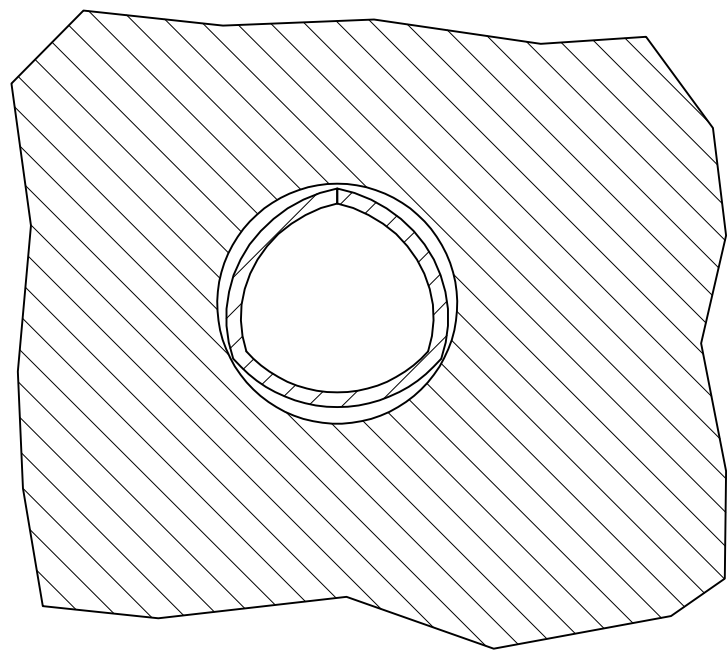
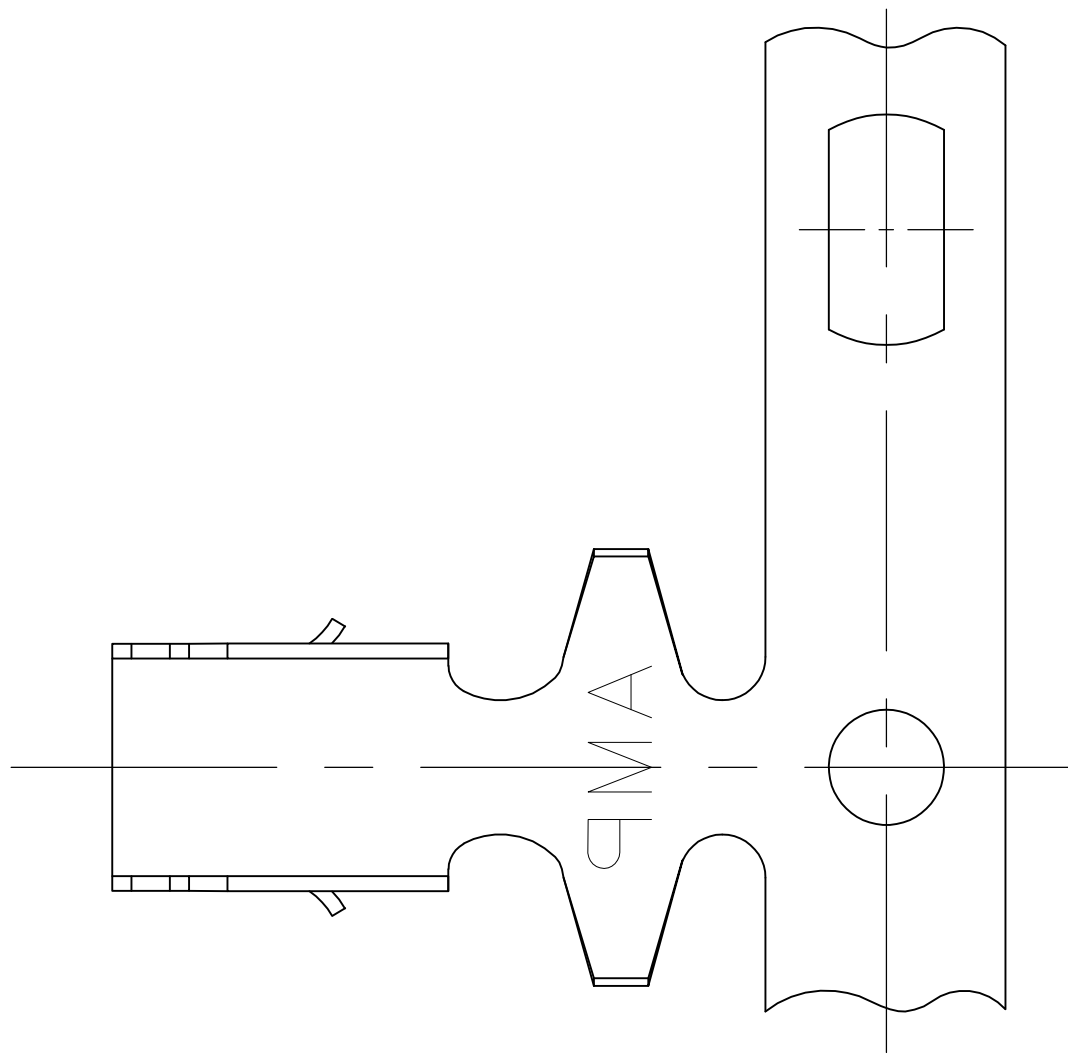
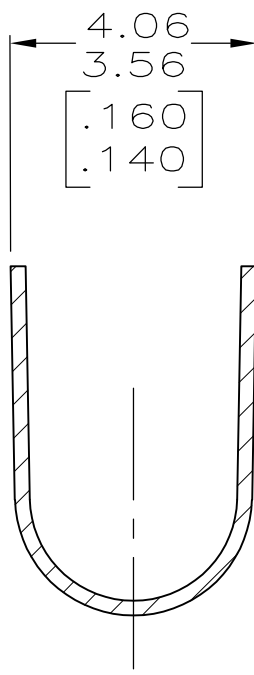
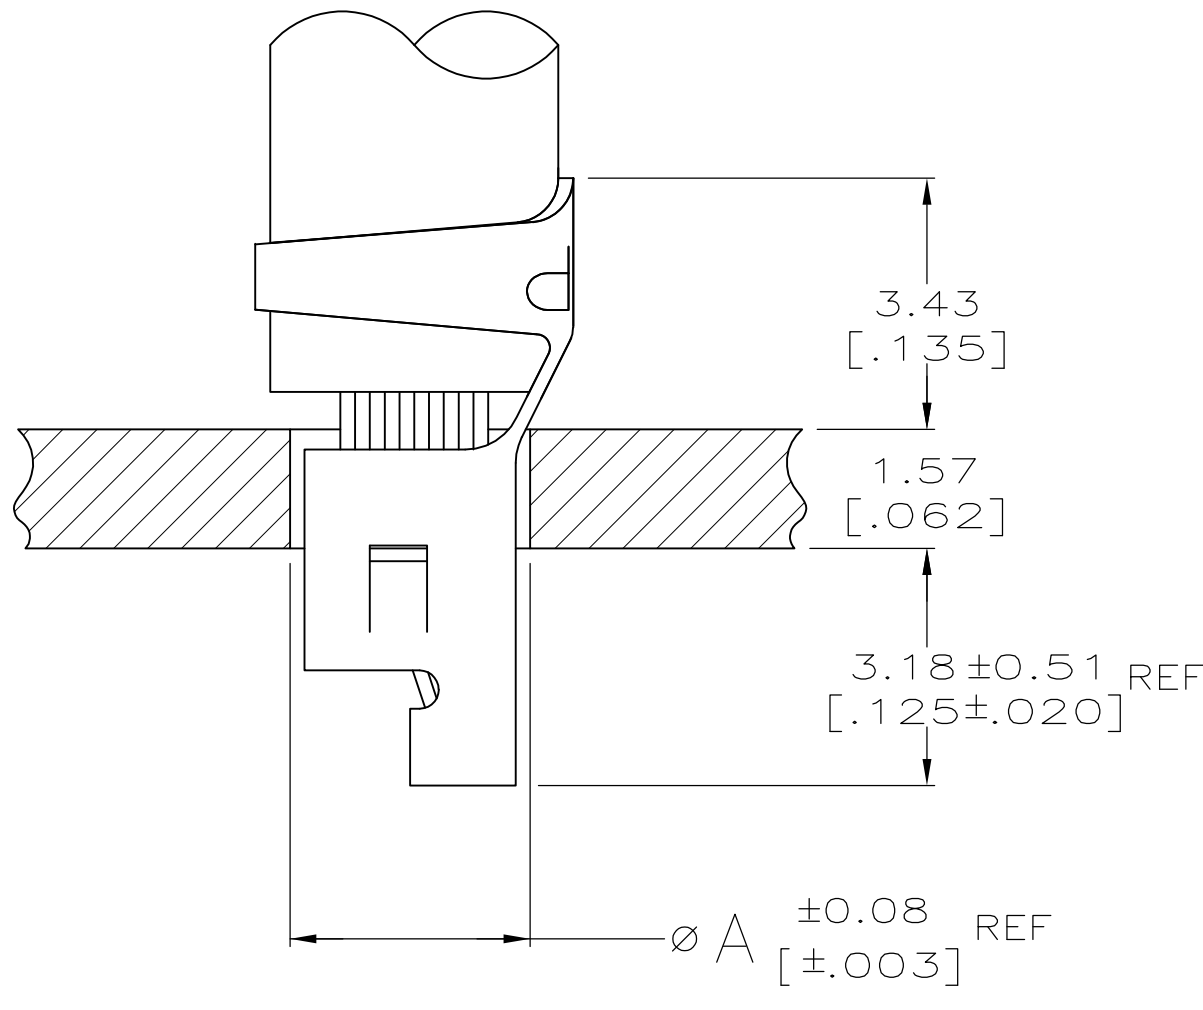


LOC	DIST	REVISIONS				
		REV	DATE	BY	CHKD	APPD
CM	00	C3	23AUG12	KH	SM	


- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 2 WIRE RANGE: 3-5.5 mm² [12-10 AWG].
- 3 INSULATION DIAMETER: 5.08 [.200] MAX.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 0.00508 [.000200] MIN BRIGHT TIN-LEAD.
- 6 0.00508 [.000200] MIN HALT TIN.

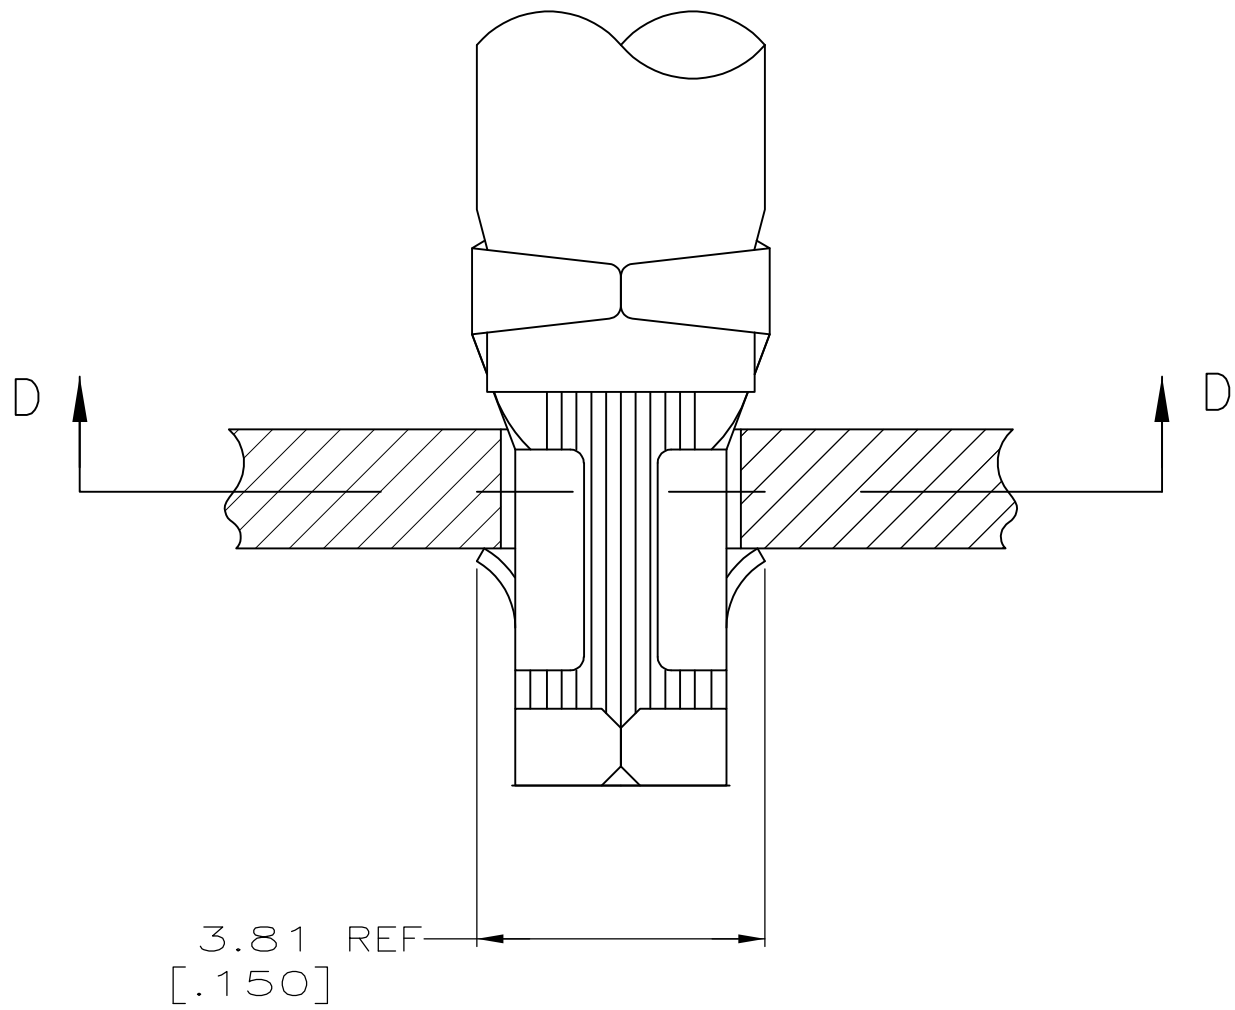


SECTION D-D

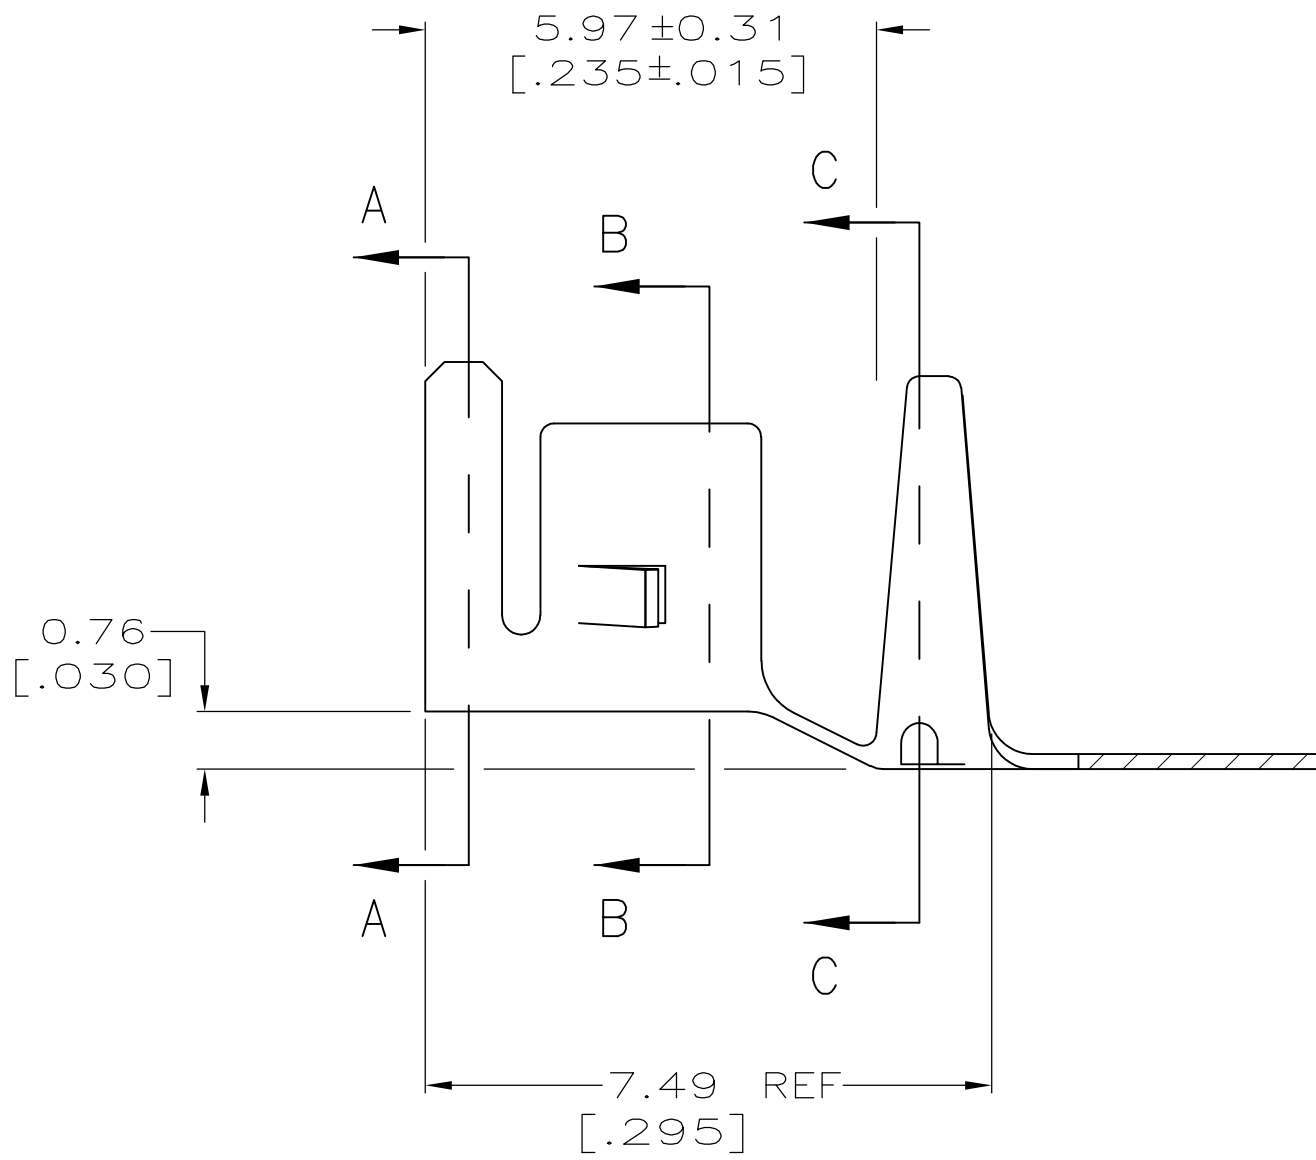

SECTION A-A

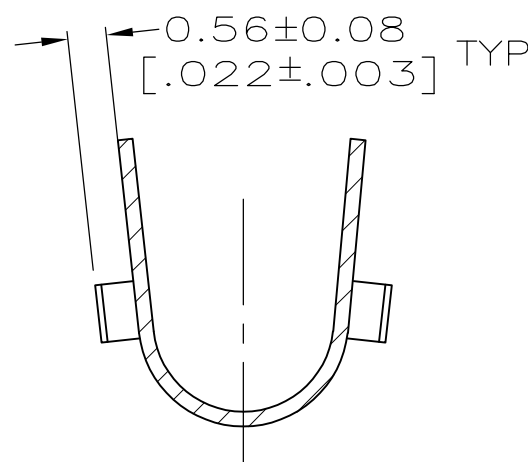

SECTION B-B

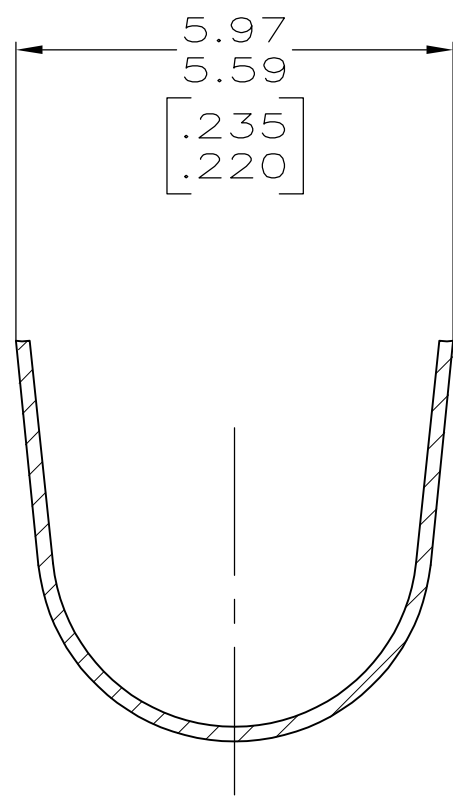

SECTION C-C

3.76 [.148]	10
3.18 [.125]	12
A	AWG

3-794037-1	6
794037-1	5
FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER	22AUG2003	TE Connectivity	
DIMENSIONS: INCHES		CHK J. ELLIS	22AUG2003	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ELLIS	22AUG2003	PRODUCT SPEC	
0 PLC ±		APPLICATION SPEC		SIZE	
1 PLC ±		WEIGHT		CAGE CODE	
2 PLC ± 0.13 [.005]		CUSTOMER DRAWING		DRAWING NO	
3 PLC ±		SCALE 10:1		SHEET 1 OF 1	
4 PLC ±		REV C3		RESTRICTED TO	
ANGLES ±		MATERIAL 0.198 [.0078] PH BRZ		A1 00779 794037	
FINISH		MATERIAL 0.198 [.0078] PH BRZ		CUSTOMER DRAWING	

METRIC