


48, 32, 16

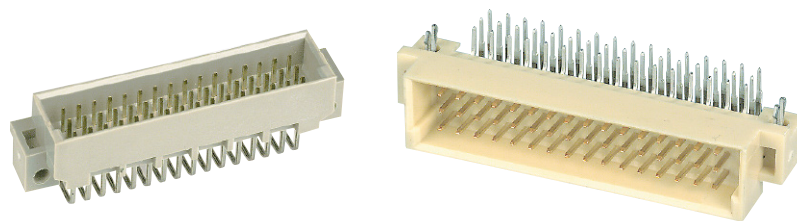

**DIN Signal
up to 2 A**

¹⁾ Recommendation for variants with clip: Drillings can be enlarged up to 3.1 mm Ø to reduce standard mounting force