

ExaMAX[®]

EPTS-2-P-D-VT-01

EPTS-2-P-D-RA-04

EPTT-2-P-11.5-D-RA

(2.00 mm) .0787"

EPTT, EPTS SERIES

ExaMAX[®] POWER MODULES

Mates with:
EPTS

SPECIFICATIONS


For complete specifications
see www.samtec.com?EPTT

Insulator Material:
Black LCP


Contact Material:
Copper Alloy

Current Rating:
14.8 A per pin
(2 pins powered)

Note:
Some sizes, styles and
options are non-standard,
non-returnable.

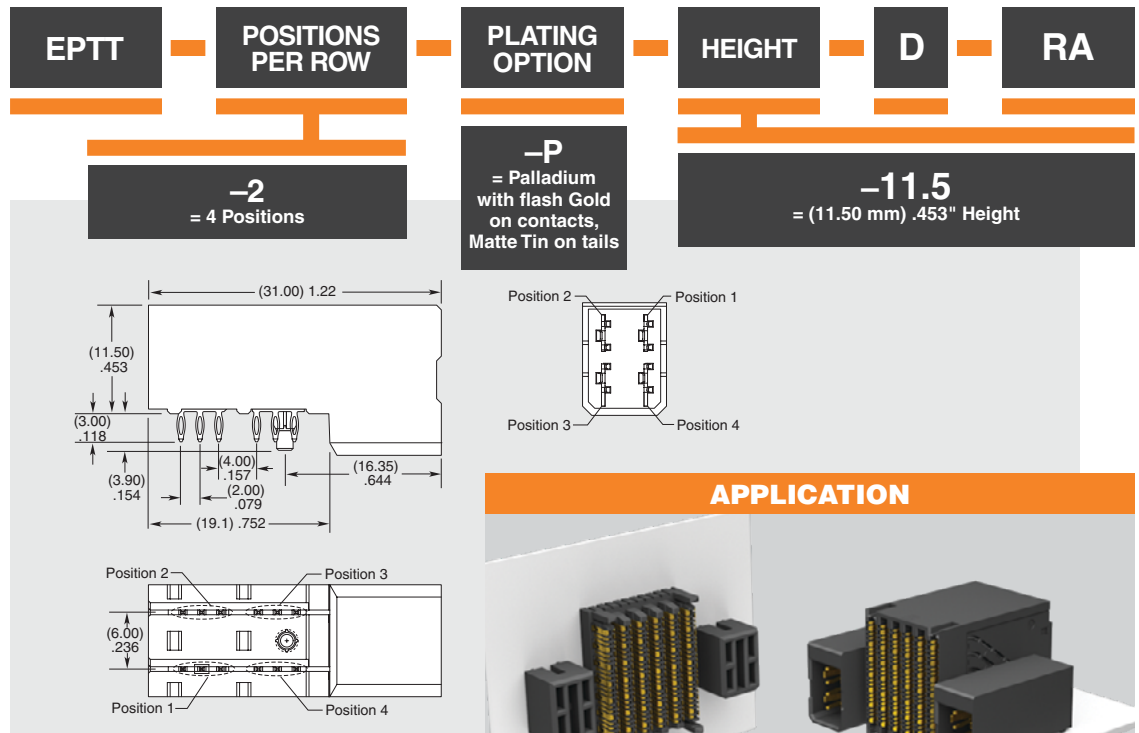

APPLICATION

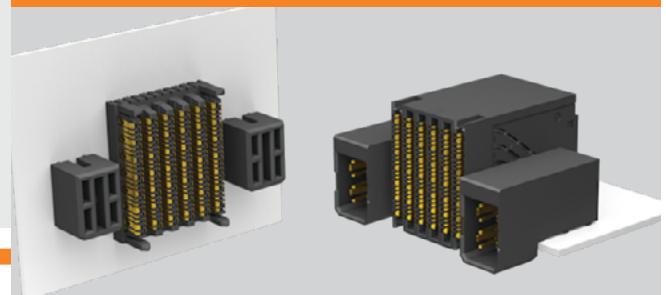

Mates with:
EPTT

SPECIFICATIONS

For complete specifications
see www.samtec.com?EPTS

Insulator Material:
Vectra E130i


Terminal Material:
Phosphor Bronze

Current Rating:
14.8 A per pin
(2 pins powered)

PIN STAGING	LENGTH CALLOUT ("X" = SETBACK DIM.)			
	POS. 1	POS. 2	POS. 3	POS. 4
-01	1.10	1.10	1.10	1.10
-02	1.10	1.10	2.60	2.60
-03	1.10	2.60	2.60	1.10
-04	1.10	2.60	2.60	2.60
-05	2.60	2.60	2.60	1.10
-06	2.60	2.60	2.60	2.60

Notes:
Some lengths, styles and
options are non-standard,
non-returnable.

ExaMAX[®] is a registered
trademark of AFCL.

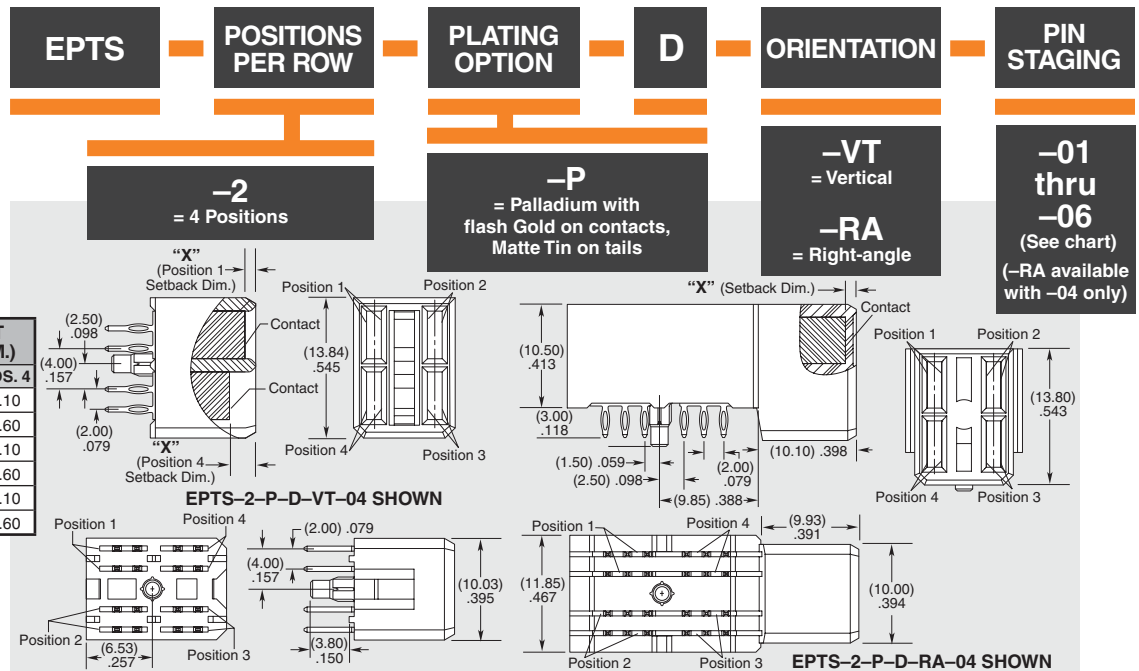

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.