

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ACTUATOR

CATALOG LISTING

JX-55

JX-55

M

DRAWING
NUMBER

ISSUE

3

REPLACES

PR-2863

RELEASE NO.

14SEP05

RJ

CHECK

APR-2863

SRH

15 SEP 72

B

0015428

SPK

14SEP05

28 MAY 69

GCH

CHECK

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69

28 MAY 69


28 MAY 69

28 MAY 69

28 MAY 69

CORROSION RESISTANT STEEL
ACTUATOR AND BRACKET (TYPE 302)

FREE POSITION
ADJUSTMENT TAB

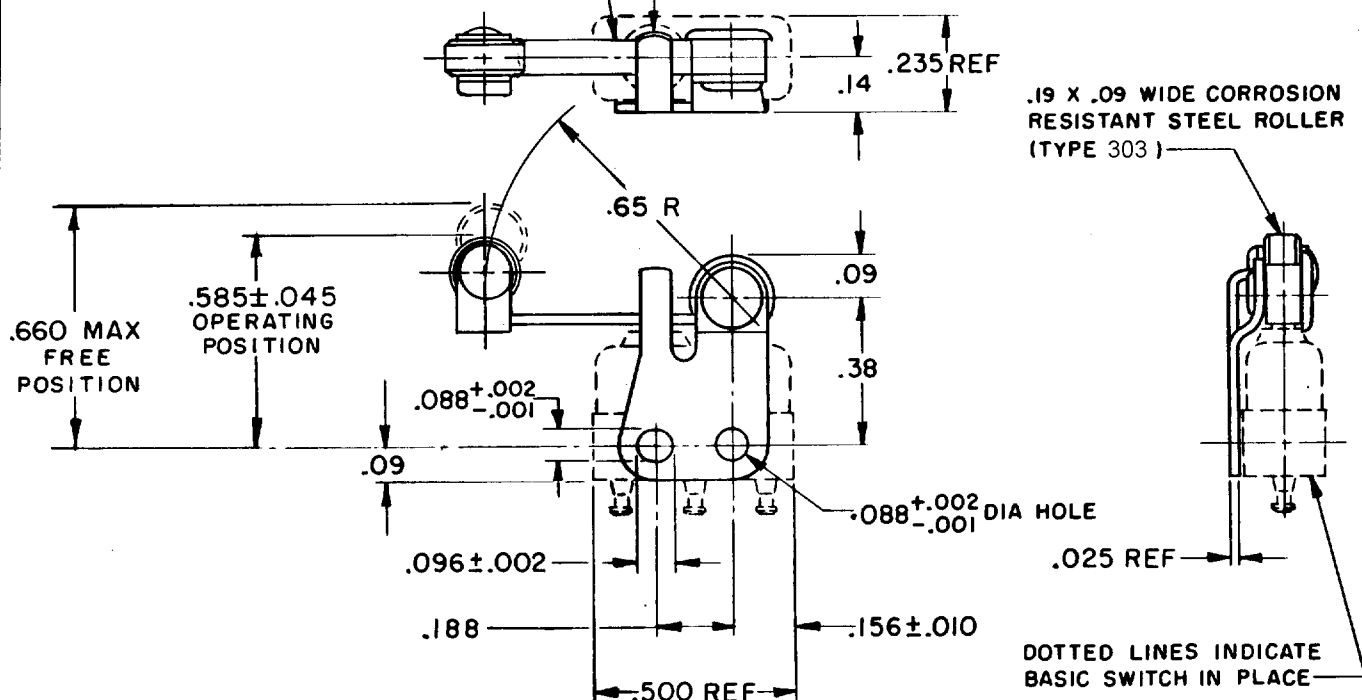

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS WITH ISX-T BASIC SWITCH INSTALLED

OPERATING FORCE ——— 1.5 OZ MAX

RELEASE FORCE ——— 4 GRAM MIN

DIFFERENTIAL TRAVEL ——— .030 MAX

OVERTRAVEL ——— .020 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm$.030
TWO PLACE (.00) $\pm$.015
THREE PLACE (.000) $\pm$.005
ANGLES $\pm$

WEIGHT