



DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEHAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

04

BS,A , 201178,002

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	6-2-91	BEC 9.3036: DIM 30.3 WAS 38.2	M B	
02	03-09-92	CAV. DIA. ENLARGED	Y.D.	
03	10-03-99	CONVERSION ME10	K.N.	
04	10-03-99	TEMPERATURE RANGE -55C INSTEAD OF -25C	K.N.	

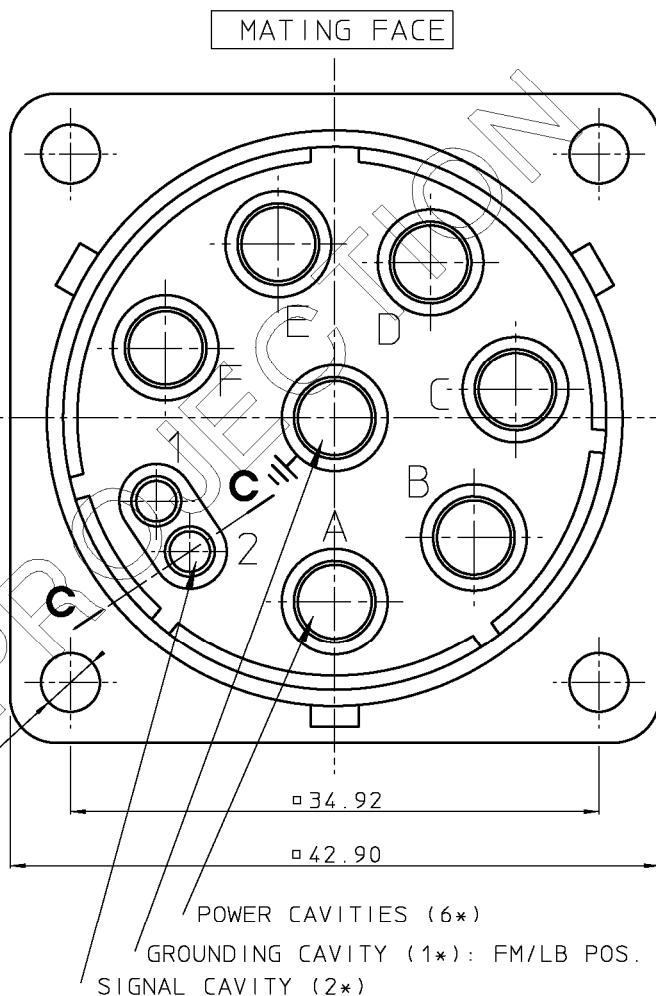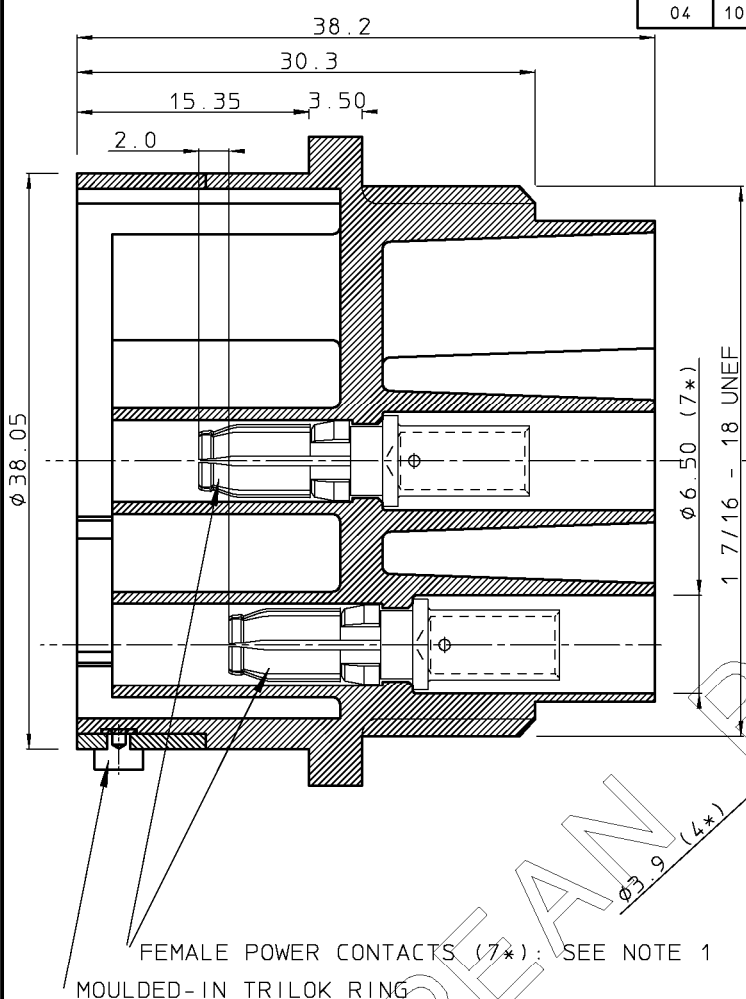

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MΩ MIN.
- TEST POTENTIAL : 2000 V EFF.
- CONNECTOR AS PER VDE 0110 GROUPE 660V


MATERIAL

- BODY : GLASS-FILLED POLYESTER UL94-V0.
COLOUR : BLACK.
- TRILOK RING: HIGH STRENGTH CUZN ALLOY, NI PLATED


NOTES

1. CONTACTS TO BE ORDERED SEPARATELY
2. FOR ADDITIONAL INFORMATION REFER TO TRIM-TRIO CATALOG.
3. CONNECTOR TO BE MATED WITH UTG6247PN

FEMALE SIGNAL CONTACT: SEE NOTE 1

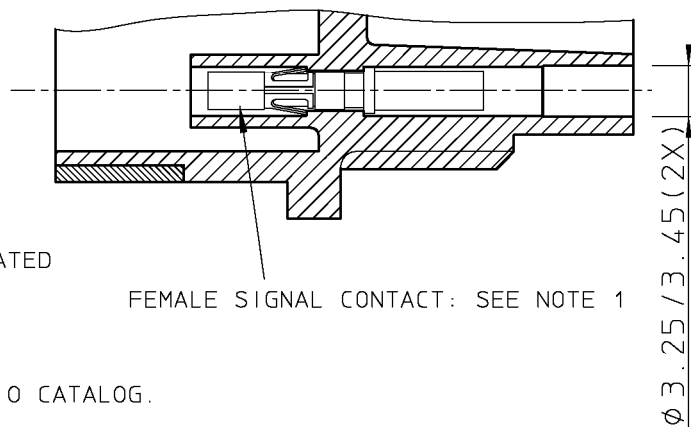

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	FEMALE RECEPTACLE		
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	26-9-90	M BUEDS	CAT. No. UTG0247S		SCALE
	CHECKED			 SOURIAU Connection Technology SOURIAU Route Nationale 23 72470 CHAMPAGNE		
	PROD. MGR.					
ALL DIMENSIONS IN MM 	PR.ENG. MGR.			BS, A , 201178-002 04		NOT EXPORT CONTROLLED
	PR. MGT. MGR.					
ALLE AFMETINGEN IN MM	REFERENCES / REFERENTIES			DRAWING NR.	CUSTOMER DRAWING	REVISION