

# 861H Class 1, Division 2 Certified Solid State Relay

## GENERAL SPECIFICATIONS




CLASS 1 DIVISION 2  
Class 1, Division 2 certification  
for use in hazardous locations



| OUTPUT CHARACTERISTICS                                    | 861HSSR***-DD                 | 861HSSR***-AC-1               | 861HSSR***-DC-1               |
|-----------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Switching Device                                          | MOSFET                        | SCR (2)                       | SCR (2)                       |
| Switching Type                                            | DC switching                  | Zero cross                    | Zero cross                    |
| Switching Configuration                                   | SPST-NO                       | SPST-NO                       | SPST-NO                       |
| Load Voltage Range                                        | 3 up to 150 VDC               | 24 up to 600 VAC              | 24 up to 600 VAC              |
| Resistive Load Rating (Arms)                              | 8 and 15 A                    | 10 A                          | 10 A                          |
| Maximum Zero Turn-On Voltage (Vpk)                        | N/A                           | 35 Vpk                        | N/A                           |
| Maximum Rate of Rise Off State Voltage (dv/dt)            | N/A                           | 200 to 500 V/uS               | 350 to 500 V/uS               |
| Incandescent Lamp Rating (Arms)                           | N/A                           | 8 A                           | 8 A                           |
| Motor Load Rating (Arms)                                  | N/A                           | 4.5 A                         | 4.5 A                         |
| Minimum Load Current to Maintain On                       | 20 mA                         | 50 mA                         | 50 mA                         |
| Non-Repetitive Surge Current (1 cycle)                    | 35 to 50 A                    | 500 A                         | 500 A                         |
| Maximum Rms Overload Current (1 second)                   | 17 to 24 A                    | 24 A                          | 24 A                          |
| Maximum Off State Leakage Current on Output (Rms)         | 10 mA                         | 10 mA                         | 10 mA                         |
| Typical On State Voltage Drop on Output (Rms)             | 1.25 VDC                      | 1.25 VDC                      | 1.25 VDC                      |
| Maximum On State Voltage Drop on output (Rms)             | 1.6 VDC                       | 1.6 VDC                       | 1.6 VDC                       |
| Maximum I <sup>2</sup> t for Fusing (A <sup>2</sup> sec.) | N/A                           | 600 to 1250                   | 600 to 1250                   |
| INPUT CHARACTERISTICS                                     |                               |                               |                               |
| Input Voltage                                             | 3.5 to 32 VDC                 | 90 to 280 VAC                 | 3 to 32 VDC                   |
| Must Release Voltage                                      | 1 VDC                         | 10 VAC                        | 1 VDC                         |
| Nominal Input Impedance                                   | Current Regulator             | 16-25 Kohms                   | Current Regulator             |
| Typical Input Current @ 5 VDC                             | 12 mA                         | 12 mA                         | 16 mA                         |
| Reverse Polarity Protection on Input                      | Active Current Limiter        | N/A                           | Active Current Limiter        |
| Input Indication                                          | Green LED                     | Green LED                     | Green LED                     |
| PERFORMANCE CHARACTERISTICS                               |                               |                               |                               |
| Maximum Turn-On/Turn-Off Time                             | 5 ms                          | 8.3 ms                        | 5 ms                          |
| Dielectric Strength (Input to Output)                     | 2500 Vrms                     | 4000 Vrms                     | 2500 Vrms                     |
| Dielectric Strength (Terminals to Chassis)                | 2500 Vrms                     | 2500 Vrms                     | 2500 Vrms                     |
| ENVIRONMENT                                               |                               |                               |                               |
| Ambient Air Temperature<br>Around the Device              | Operation                     | -30 to 80 °C                  | -30 to 80 °C                  |
|                                                           | Storage                       | -40 to 100 °C                 | -40 to 100 °C                 |
| Safety Cover                                              | IP20                          | IP20                          | IP20                          |
| MISCELLANEOUS CHARACTERISTICS                             |                               |                               |                               |
| Thermal Resistance J to C Tj=125°C °C/W                   | 1.4 °C/W                      | 0.66 °C/W                     | 0.66 °C/W                     |
| Integral Heat Sink °C/W                                   | 4.0 °C/W                      | 4.0 °C/W                      | 4.0 °C/W                      |
| Maximum Terminal Wire Capacity                            | 14 AWG (2.5 mm <sup>2</sup> ) | 14 AWG (2.5 mm <sup>2</sup> ) | 14 AWG (2.5 mm <sup>2</sup> ) |
| Maximum Terminal Screw Torque                             | 7.1 lb-in (0.8 Nm)            | 7.1 lb-in (0.8 Nm)            | 7.1 lb-in (0.8 Nm)            |
| Weight                                                    | 4.1 oz (127.1 g)              | 4.1 oz (127.1 g)              | 4.1 oz (127.1 g)              |

## PART NUMBER EXPLANATION

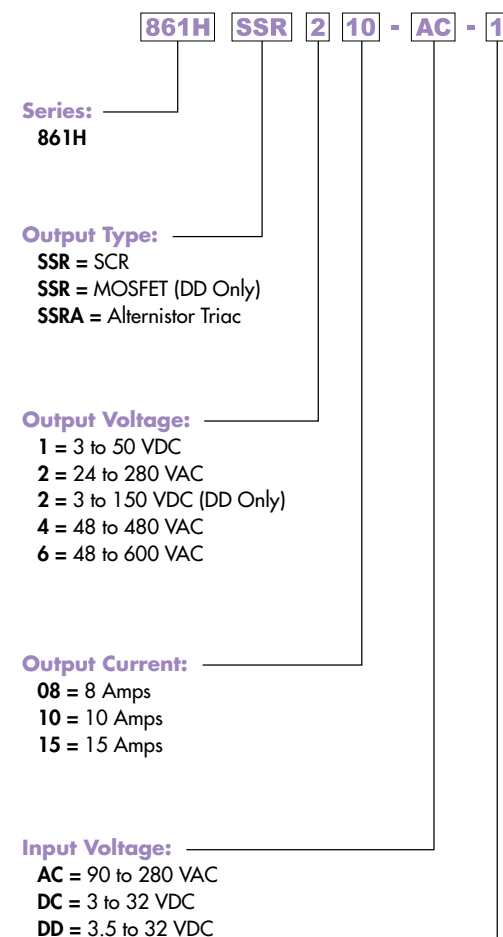


## Contact Configuration & Switching Type:


- 1 = SPST-NO, Zero Cross
- 2 = SPST-NO, Random
- 4 = SPST-NC, Random
- Null = SPST-NO, DC Switching

## DIMENSIONS

shown in inches (millimeters)

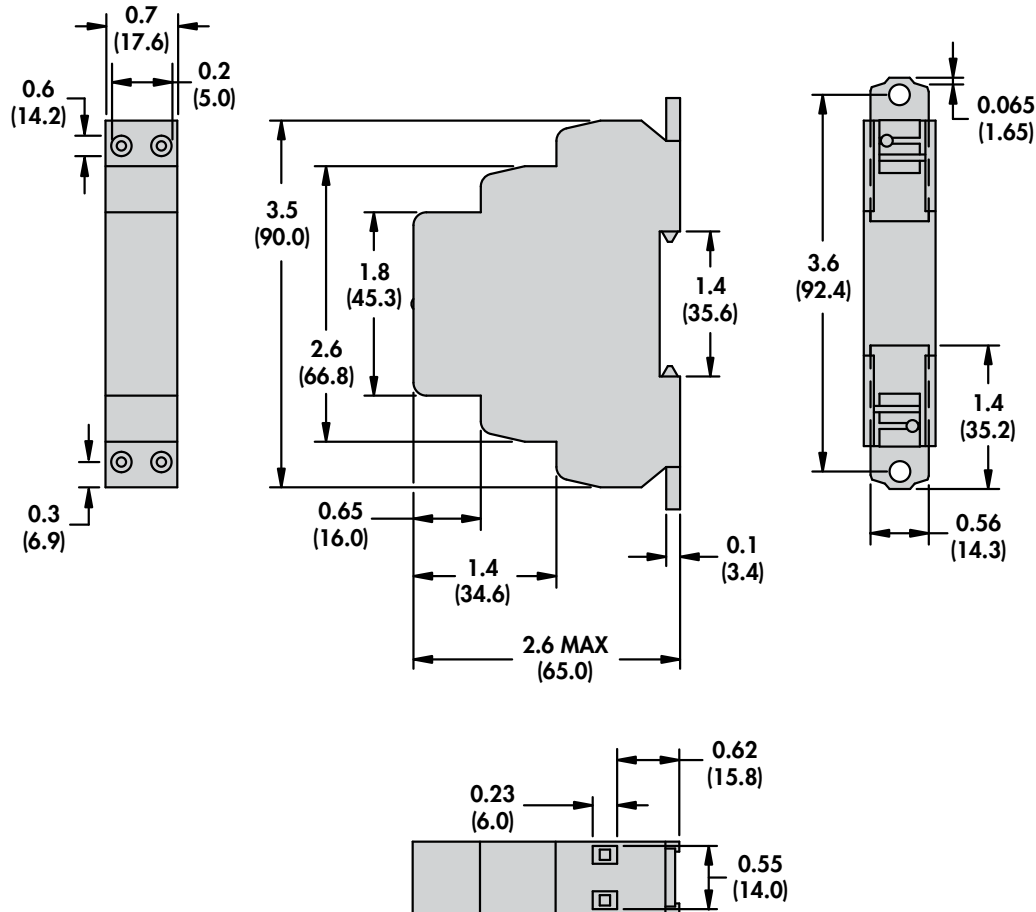

## WIRING DIAGRAM

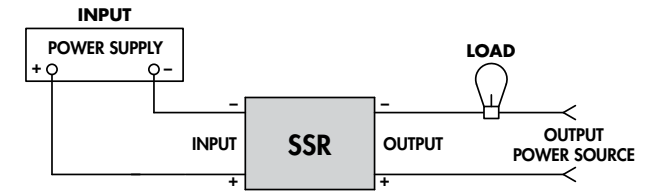

## DERATING CURVES

A minimum spacing of 17.5 mm between relays is required in order to achieve the respective derating curves.

