


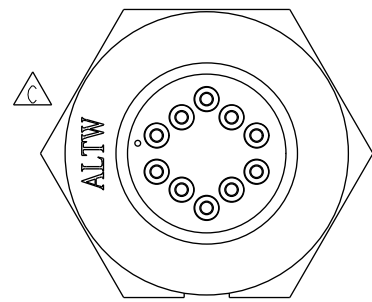
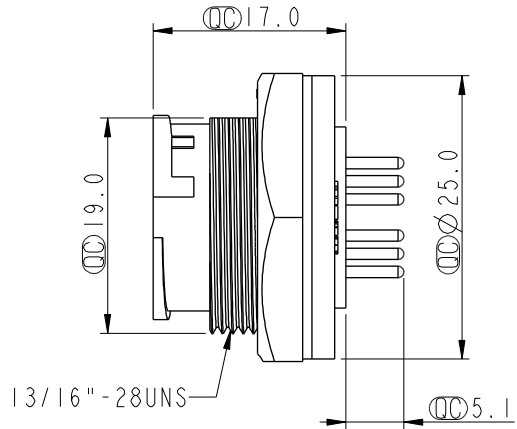
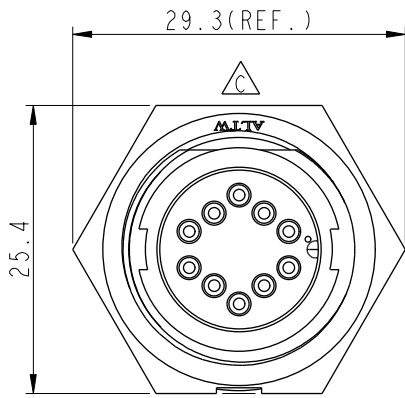



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0077	2008/09/25	Shin	Add Note
C	LEN1630522	2016/03/17	Ruru	Change Logo
D	CI90271	2019/03/04	Ruru	Modify Note




10Pin Male Connector
Male Pin PCB Layout

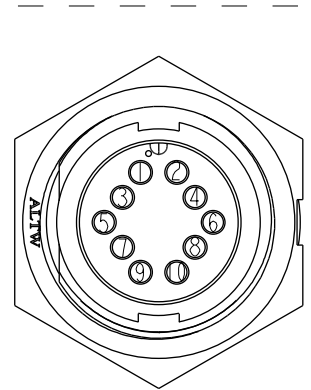

Pin Assignments
Front View

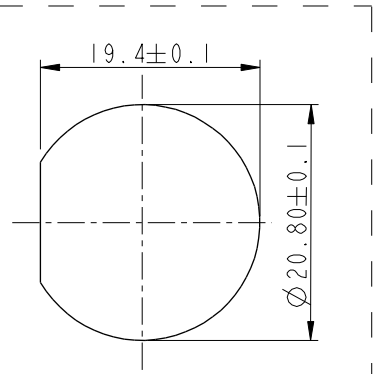

Recommended Panel Cut-Out

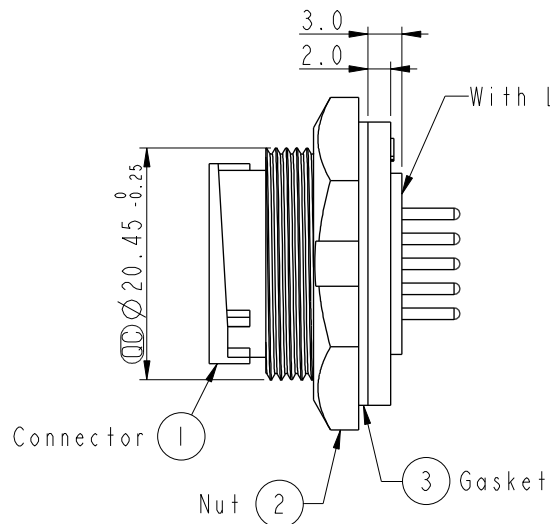

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

A	UNIT:mm				TITLE Middle Panel Lock 10Pin M Conn M Pin		ITEM NO CD-10PMMP-LC7001	DRAWN BY Ruru	DATE 2019-03-04
	TOLERANCE	.X	±0.25	SCALE	1:1	SIZE	A4	DWG NO	CHECKED BY
		.XX	±0.1					CD-10PMMP-LC7001	Rita
		.XXX	±0.05	REV.	D	WC-REV.	A.3	CUSTOMER	APPROVED BY
	ANGLES		±1°				Inspection item	ALTW	Max
									DATE
									2019-03-04

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.