
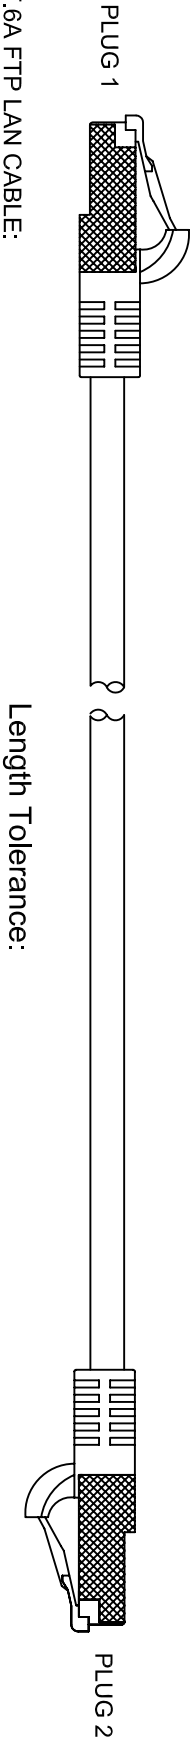


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REVISIONS		
REV.	DESCRIPTION	DATE
A	NEW RELEASE	2/APR/2014

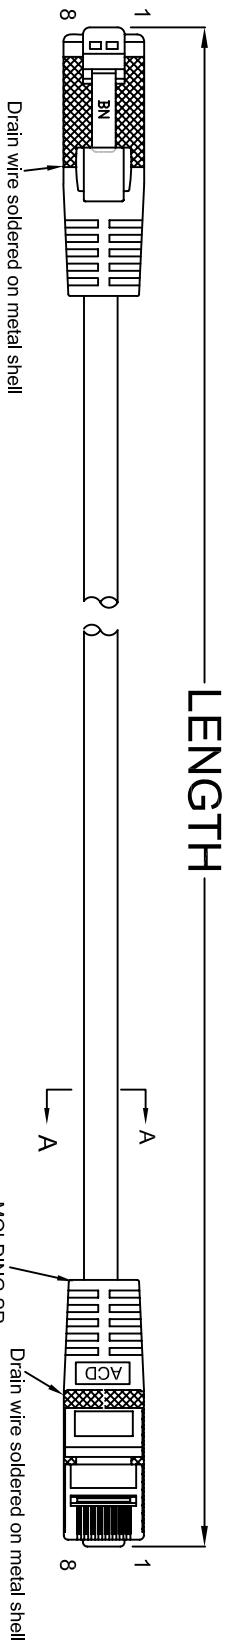

Length Tolerance:

Length <= 0.5M +30/-0mm


Length > 0.5M & < 1M +50/-0mm

Length >= 1M & <= 5M +/-50mm

Length > 5M & <= 10M +/-100mm

- CAT. 6A FTP LAN CABLE:
1. Conductor (Stranded): 26AWG (7X0.16mm);
 2. Insulation: HD-PE;
 3. Color Code:
PAIR 1: Blue & White/Blue
PAIR 2: Orange & White/Orange
PAIR 3: Green & White/Green
PAIR 4: Brown & White/Brown
 4. Al/Mylar: Coverage 100%; Overlap 25%/min;
 5. Drain: 7/0.16 ± 0.01mm Tinned Copper;
 6. Cable Marking:
Amphenol Cables on Demand TYPE CM 26AWG 4PR 75° C
(UL) c(UL) E314104 TIA/EIA-568-B-2-10 FTP CAT. 6A

7. Rated Temperature: 75° C.
8. Rated Voltage: 300V.
9. UL cUL CM TYPE.
10. Impedance: 100 ± 15% Ω (1 ~ 500 MHz)
11. DC-Resistance Capacitance Unbalance: 5 %
12. DC-Resistance: 14.8 Ω/100m AT 20° C MAX
13. Bandwidth: 500 Mhz
14. Bending Radius: 25.4mm (1" min)
15. Transmission Requirements TIA/EIA-568-B-2-10 PATCH CORD

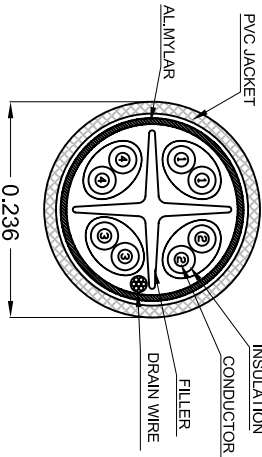

PIN OUT: T568B		
PLUG 1	PLUG 2	COLOR
PIN 1	PIN 1	WHITE/ORANGE
PIN 2	PIN 2	ORANGE
PIN 3	PIN 3	WHITE/GREEN
PIN 4	PIN 4	BLUE
PIN 5	PIN 5	WHITE/BLUE
PIN 6	PIN 6	GREEN
PIN 7	PIN 7	WHITE/BROWN
PIN 8	PIN 8	BROWN
Shielded	Shielded	DRAIN WIRE



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
DECIMALS	ANGLES	EAR NO.
.X	± X°	APPROVALS
.XX	± XX	DATE
.XXX	± XXX	2/APR/2014
THIRD ANGLE PROJECTION	CHECKED	2/APR/2014
RESP ENG	BA	
MP - 6ARJ45SNNX		

NOTES: UNLESS OTHERWISE SPECIFIED