
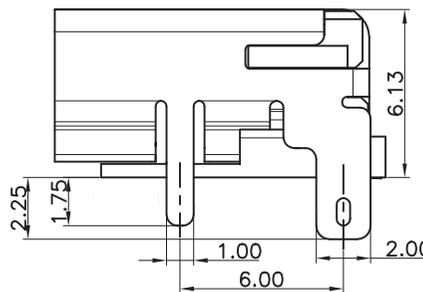


RECOMMENDED P.C.B PATTERN LAYOUT  
T=1.6±0.15

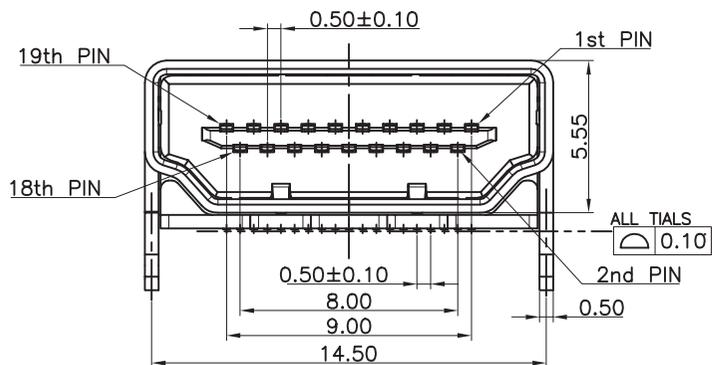

TECHNICAL CHARACTERISTICS

MATERIAL  
INSULATOR: LCP  
COLOR: BLACK  
SHIELDING: BRASS TIN PLATED  
CONTACT: PHOSPHOR BRONZE  
CONTACT TYPE: STAMPED  
LEVEL: 3 AS PER CECC 75 301-802

ENVIRONMENTAL  
OPERATING TEMPERATURE: -25 TO 85°C  
FLAMABILITY RATING: UL94-V0  
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
CURRENT RATING: 0.5A  
VOLTAGE RATING: 40V DC  
INSULATOR RESISTANCE: UNMATED = 100 MOHM,  
MATED = 10 MOHM  
DIELECTRIC WITHSTANDING: UNMATED = 500VAC,  
MATED = 300VAC  
CONTACT RESISTANCE: 30 mOHM MAX  
SHELL: 50 mOHM MAX

SOLDERING: REFLOW PROCESS ONLY

PACKAGING  
TAPE & REEL

RoHS Compliant			
G			
F			
E			
D			
C			
B	05-OCT-07 □	INSET INFO. □	CH □
A	11-OCT-06	PDF	JP
REV	DATE	FILE	BY



GENERAL TOLERANCE  
.X = +/- 0.2  
.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: ANGLED SMT HDMI

SCALE:

WERI PART NO: 685119134923

SHEET: 1/1

DRAW: SEAMAN

SIZE

**A4**