

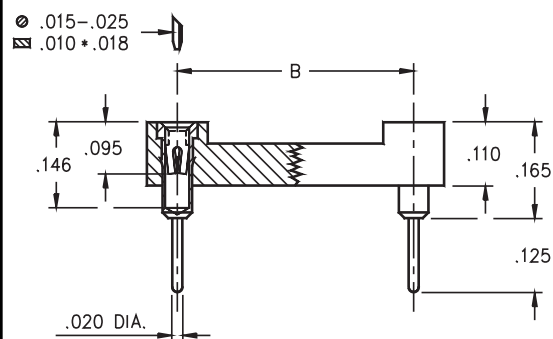


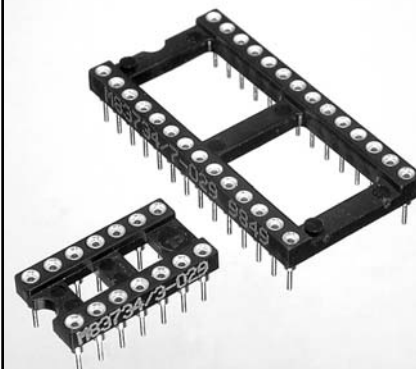

- Sockets are XY stackable.
- Machined outer sleeve with Hi-Rel, BeCu #30 inner contact.
- Socket pins feature closed-entry construction eliminating any solder/flux wicking problems.
- Packaged in tubes compatible with automatic insertion equipment.
- Series 110 use MM #1001 pins. See page 136 for details.
- Insulators are high temperature thermoplastic.



Total number of pins				Quantity per tube	Ordering Information			
	A	B	C		Mill-Max Part Number		Military Part Number	
8	0.4	0.3	0.4	50	110-XX-308-41-530000	M83734/2-YYY		
14	0.7	0.3	0.4	28	110-XX-314-41-530000	M83734/3-YYY		
16	0.8	0.3	0.4	25	110-XX-316-41-530000	M83734/4-YYY		
18	0.9	0.3	0.4	22	110-XX-318-41-530000	M83734/5-YYY		
20	1.0	0.3	0.4	20	110-XX-320-41-530000	M83734/13-YYY		
22	1.1	0.4	0.5	18	110-XX-422-41-530000	M83734/6-YYY		
24	1.2	0.6	0.7	16	110-XX-624-41-530000	M83734/8-YYY		
28	1.4	0.6	0.7	14	110-XX-628-41-530000	M83734/7-YYY		
40	2.0	0.6	0.7	10	110-XX-640-41-530000	M83734/10-YYY		
48	2.4	0.6	0.7	8	110-XX-648-41-530000	M83734/14-YYY		
64	3.2	0.9	1.0	6	110-XX-964-41-530000	M83734/15-YYY		
								
SEE PAGE 35 FOR COMPLETE QPL								
SPECIFY MILL-MAX PLATING CODE XX=					33	83	88	
FOR MILITARY CODE YYY=					028	029	030	
Sleeve (Pin) 					30μ" Au	300μ" Sn/Pb	300μ" Sn/Pb	
Contact (Clip) 					30μ" Au	30μ" Au	100μ" Sn/Pb	