

VIDEO ON-SCREEN DISPLAY

■ GENERAL DESCRIPTION

The **NJM2214** is a video display convertive integrated circuit. Its function is below.

- Character superimpose.
- 8 color generating function.
- Luminance signal wave shape-up function.
- Video effecter function of painting to background superimposed character or some part of video signal.

■ FEATURES

- Operating Voltage (+4.7V to +5.3V)
- Internal 8 Color Generating Circuit.
- Package Outline SDIP22, DMP24
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage 4.7 to 5.3V


■ APPLICATION

- VCR, Video Camera

■ PACKAGE OUTLINE



NJM2214L



NJM2214M

NJM2214

■ ABSOLUTE MAXIMUM RATINGS

($T_a=25^\circ$)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-----------|-----------------------------|------------------|
| Supply Voltage | V^+ | 10 | V |
| Power Dissipation | P_D | (SDIP22) 700 (DMP24) 700 | mW |
| Operating Temperature Range | T_{opr} | -20 to +75 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +125 | $^\circ\text{C}$ |

■ ELECTRICAL CHARACTERISTICS

($T_a=25^\circ$, $V^+=5\text{V}$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------|-----------|---|------------------------|------|------|-------------------|
| Operating Current | I_{CC} | No signal, No load | 17 | 25 | 33 | mA |
| Video Switch Voltage Gain | G_V | 10, 11, 15, 22 (11, 12, 17) Pin=Low 10STEP Stair wave, 2.2V _{P-P} , R1=5K | -1 | 0 | +1 | dB |
| Frequency Characteristics | G_F | 10, 11, 15, 22 (11, 12, 17) Pin=Low 2V _{P-P} , 4MHz, R1=5K | -1 | 0 | +1 | dB |
| Differential Gain | DG | 10, 11, 15, 22 (11, 12, 17) Pin=Low 10STEP Stair wave, 2.2V _{P-P} , R1=5K | -3 | 0 | +3 | % |
| Differential Phase | DP | 10STEP Stair wave, 2.2V _{P-P} , R1=5K | -3 | 0 | +3 | degree |
| 8 Color Output | | 15 (17) Pin=High, 10, 11, 22 (11, 12) Pin=Low (Note) | | | | |
| White | Amplitude | C_{1A} | - | 0 | 100 | mV _{P-P} |
| | Luminance | C_{1D} | 1.56 | 1.66 | 1.76 | V |
| | Phase | C_{1P} | - | - | - | degree |
| Yellow | Amplitude | C_{2A} | 810 | 900 | 990 | mV _{P-P} |
| | Luminance | C_{2D} | 1.45 | 1.55 | 1.65 | V |
| | Phase | C_{2P} | Phase : Ref. to Yellow | -10 | 0 | 10 |
| Cyan | Amplitude | C_{3A} | 1160 | 1290 | 1420 | mV _{P-P} |
| | Luminance | C_{3D} | 1.26 | 1.36 | 1.46 | V |
| | Phase | C_{3P} | | 106 | 116 | 126 |

() : DMP

■ ELECTRICAL CHARACTERISTICS

($T_a=25^\circ$, $V^+=5V$)

| PARAMETER | | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|-----------|-------------|----------------|------|------|------|-------------------|
| Green | Amplitude | C_{4A} | | 1080 | 1200 | 1320 | mV _{P-P} |
| | Luminance | C_{4D} | | 1.14 | 1.24 | 1.34 | V |
| | Phase | C_{4P} | | 63 | 73 | 83 | degree |
| Magenta | Amplitude | C_{5A} | | 1080 | 1200 | 1320 | mV _{P-P} |
| | Luminance | C_{5D} | | 0.96 | 1.06 | 1.16 | V |
| | Phase | C_{5P} | | 243 | 253 | 263 | degree |
| Red | Amplitude | C_{6A} | | 1160 | 1290 | 1420 | mV _{P-P} |
| | Luminance | C_{6D} | | 0.85 | 0.95 | 1.05 | V |
| | Phase | C_{6P} | | 286 | 296 | 306 | degree |
| Blue | Amplitude | C_{7A} | | 810 | 900 | 990 | mV _{P-P} |
| | Luminance | C_{7D} | | 0.66 | 0.76 | 0.86 | V |
| | Phase | C_{7P} | | 170 | 180 | 190 | degree |
| Black | Amplitude | C_{8A} | | - | 0 | 100 | mV _{P-P} |
| | Luminance | C_{8D} | | 0.54 | 0.64 | 0.74 | V |
| | Phase | C_{8P} | | - | - | - | degree |
| Blanking Pulse Input Threshold Voltage | | V_{TH-19} | Pin 19 (21) | 1.0 | 1.5 | 2.0 | V |
| HD | | V_{TH-18} | Pin 18 (20) | 1.0 | 1.5 | 2.0 | V |
| Invert | | V_{TH-11} | Pin 11 (12) | 1.0 | 1.5 | 2.0 | V |
| 2 Value Selection | | V_{TH-10} | Pin 10 (11) | 1.0 | 1.5 | 2.0 | V |
| Background ON/OFF | | V_{TH-15} | Pin 15 (17) | 1.0 | 1.5 | 2.0 | V |
| Matrix 1 | | V_{TH-M1} | Pin 1 (1) | 3.3 | 3.9 | 4.5 | V |
| Matrix 2 | | V_{TH-M2} | Pin 2 (2) | 3.3 | 3.9 | 4.5 | V |
| Matrix 3 | | V_{TH-M3} | Pin 3 (3) | 3.3 | 3.9 | 4.5 | V |
| Character Input | | V_{TH-21} | Pin 21 (23) | 0.5 | 1.0 | 1.5 | V |
| EXT/Character Selection | | V_{TH-20} | Pin 20 (22) | 1.0 | 1.5 | 2.0 | V |

() : DMP

(Note) : $f_{SC1}, f_{SC2}=3.58MHz$, $300mV_{PP}$
 f_{SC1} , =same phase of color burst signal.
 f_{SC2} , =90 degree phase lag from f_{SC1} .

NJM2214

■ RELATION BETWEEN 8 COLOR OUTPUT AND MATRIX INPUT

| COLOR | MATRIX 1 | MATRIX 2 | MATRIX 3 |
|---------|----------|----------|----------|
| White | L | L | L |
| Yellow | H | L | L |
| Cyan | L | H | L |
| Green | H | H | L |
| Magenta | L | L | H |
| Red | H | L | H |
| Blue | L | H | H |
| Black | H | H | H |


L=0V (DC)

H=5V (DC)


■ CONTROL SIGNAL AND FUNCTION

| 15 PIN | 10 PIN | 11 PIN | 20 PIN | |
|--------|--------|--------|--------|--|
| L | L/H | L | L | Character superimposer (White/Black) on video through signal output. |
| H | L/H | L | L | Character superimposer (White/Black) on background (8 color). |
| H | L/H | H | L | Character superimposer (color) on background (White/Black). |
| L | L | H | L | Character superimposer (color) on video through signal. |
| L | L/H | L | H | Luminance modification. Strong bright point is White/Black. |
| H | L/H | L | H | Colored except strong bright point. |
| H | L/H | H | H | Colored at strong bright point and others is White/Black. |
| L | H | H | H | Colored at strong bright point and others is video through. |

TEST CIRCUIT

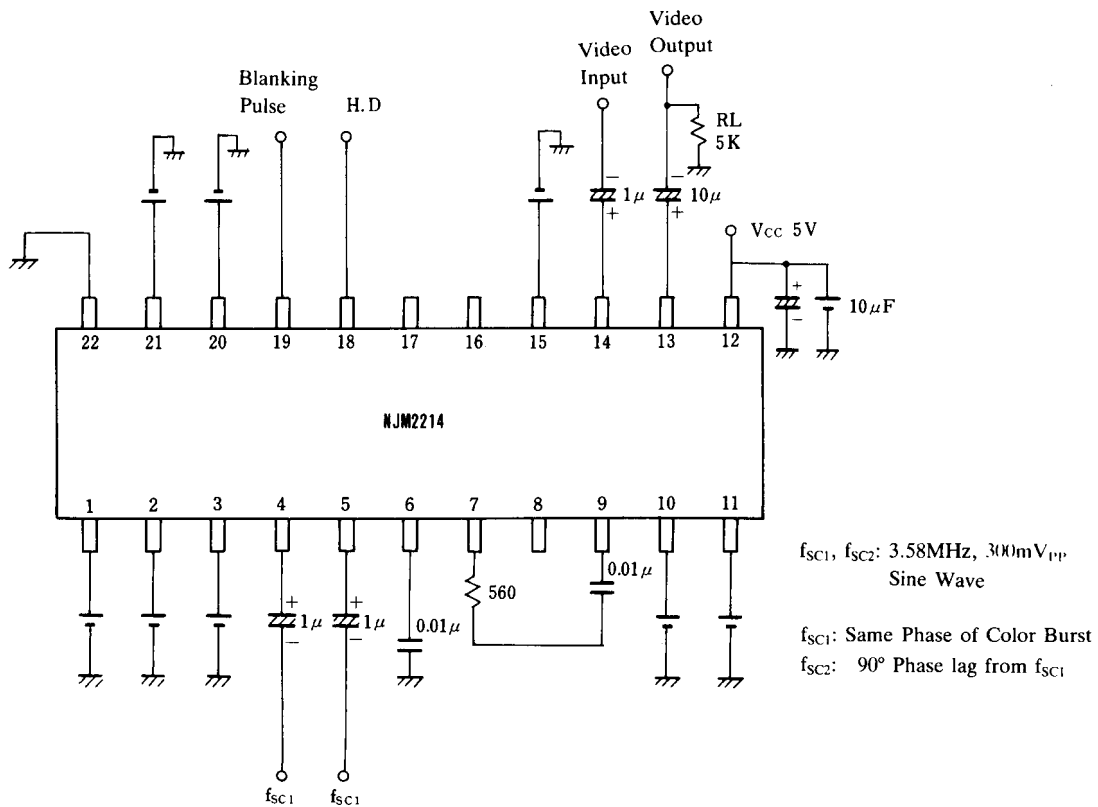


TYPICAL APPLICATION

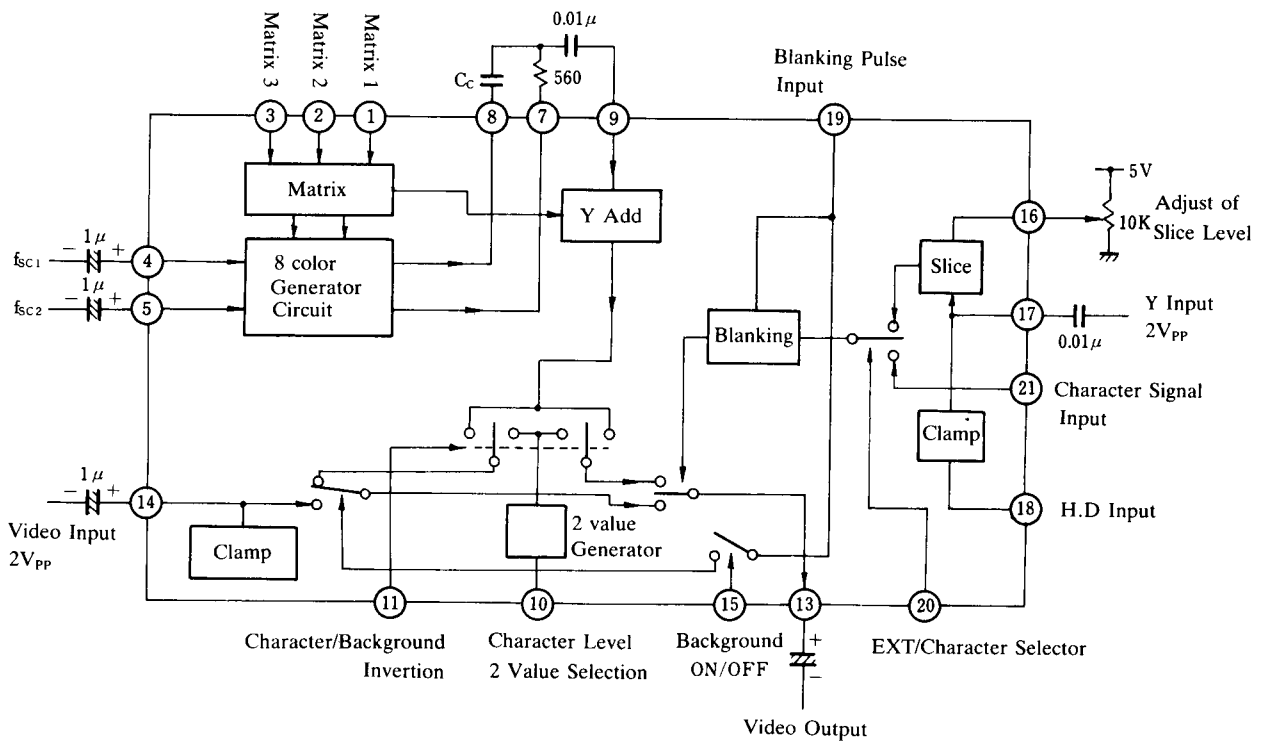

NJM2214

■ APPLICATION

This IC requires $1M\Omega$ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

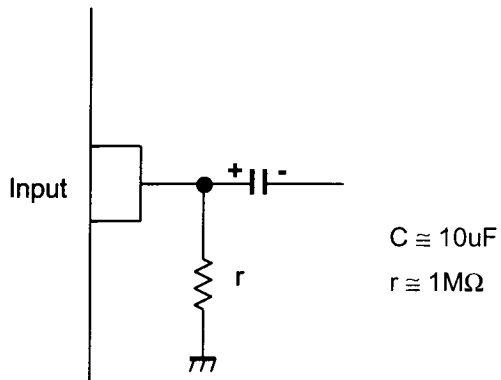

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2214M](#) [NJM2214L](#)