



Series
EPXB

13P1 ENVIRONMENTAL INSERT FOR SOCKET CONTACTS - POLARIZATION A
WITH 2 SIZE 12 , 4 SIZE 16, 6 SIZE 20 CAVITIES
AND 1 CAVITY FOR 5 POWER SOCKET CONTACTS (P/N: 617 390 XXX, 617 370 XXX AND 617 382 XXX).


Issue:
April 20 2007

Page
1/1


FRONT VIEW

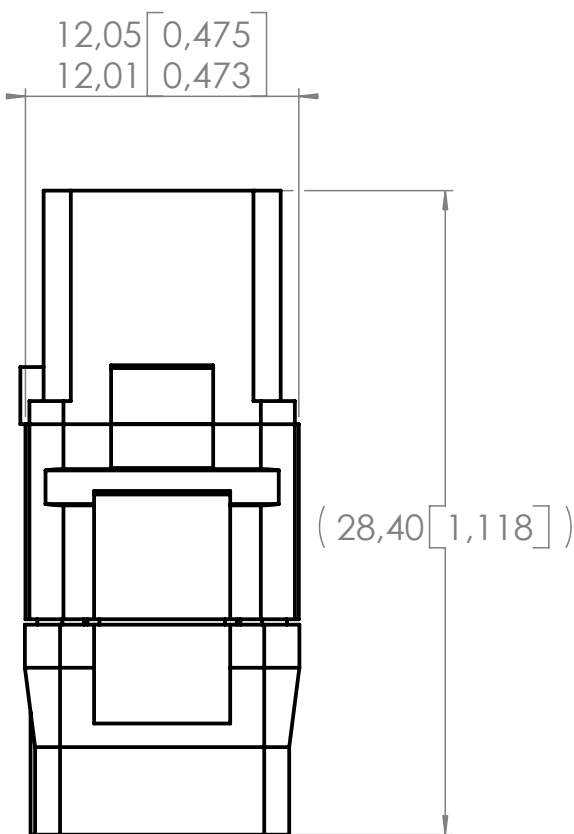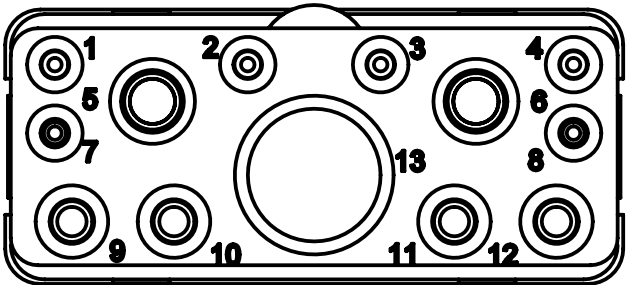

DATE CODE

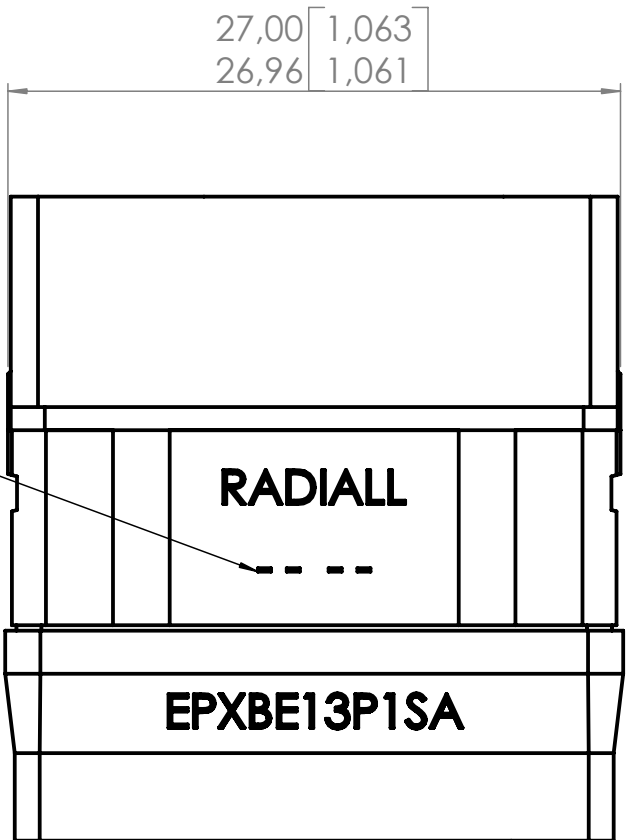

REAR VIEW

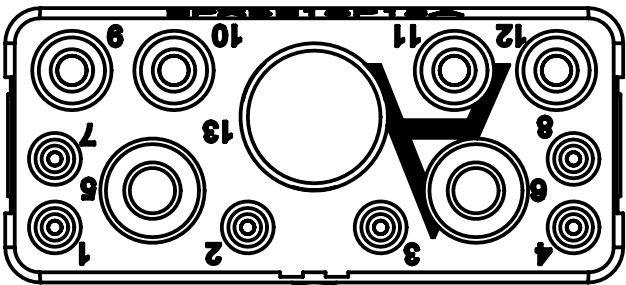


Materials

- Insert : thermosetting fiberglass filled per ASTM D 5948-96, with metallic retention clips per ASTM-B-194
- Rear grommet : fluorosilicone elastomer per MIL-R-25988 B except 4.6.6.1

Temperature range : -65°C +175°C (-85°F +347°F)

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN: M060009453A				
NOM: LE GLOAHEC				
DATE: Mar 03, 2006	Apr 20 2007	0.475 was 0.474	MALTY	M.Pessard
APPR.: PESSARD	Nov. 6, 06	Size 5 cavity updated.	L.Garcia	PESSARD
	Issue	Revisions	Name	Approved

EPXBE13P1SAEN

RADIAL PROPRIETARY INFORMATION

Confidential information not to be disclosed to third parties without Radial approval
This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311