

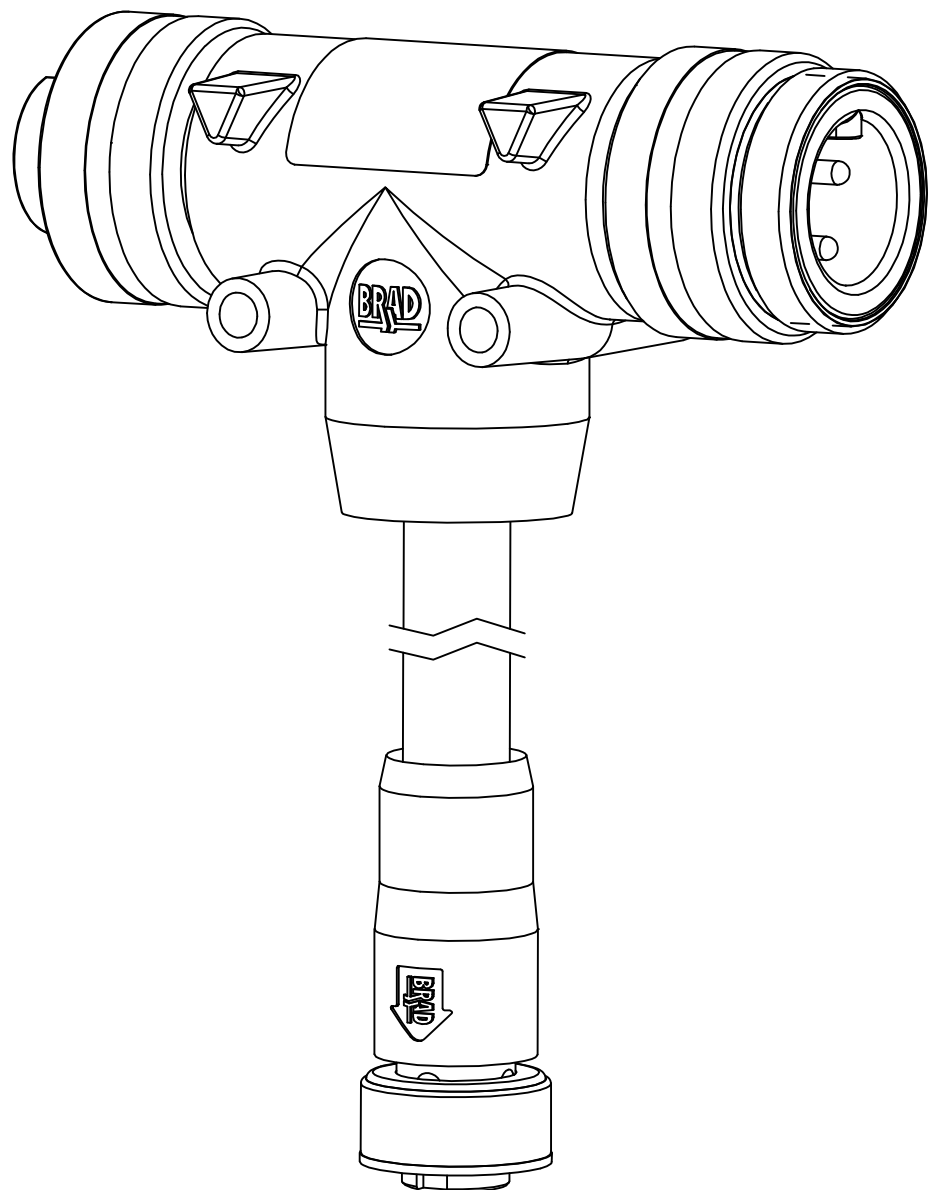
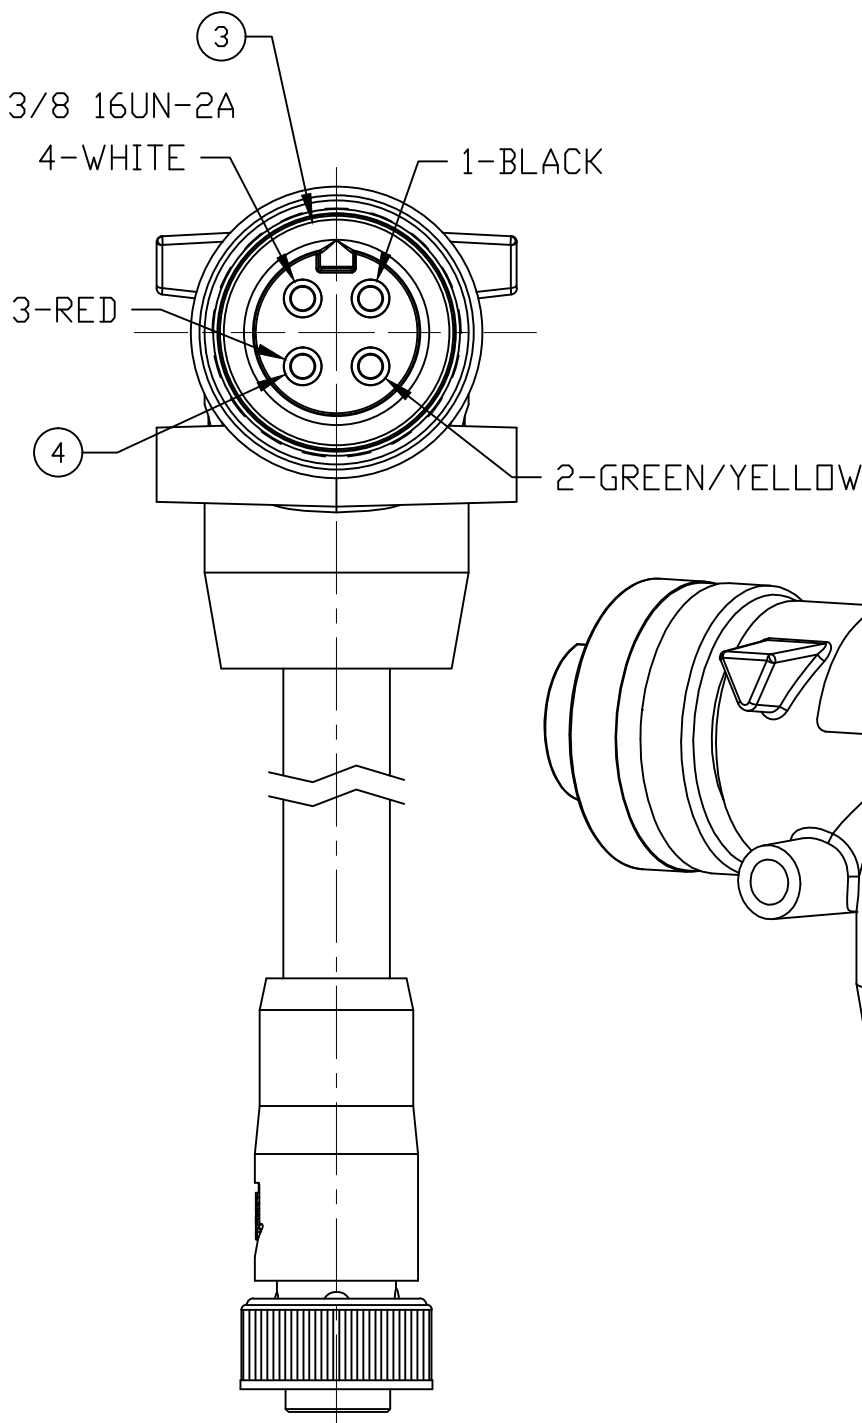
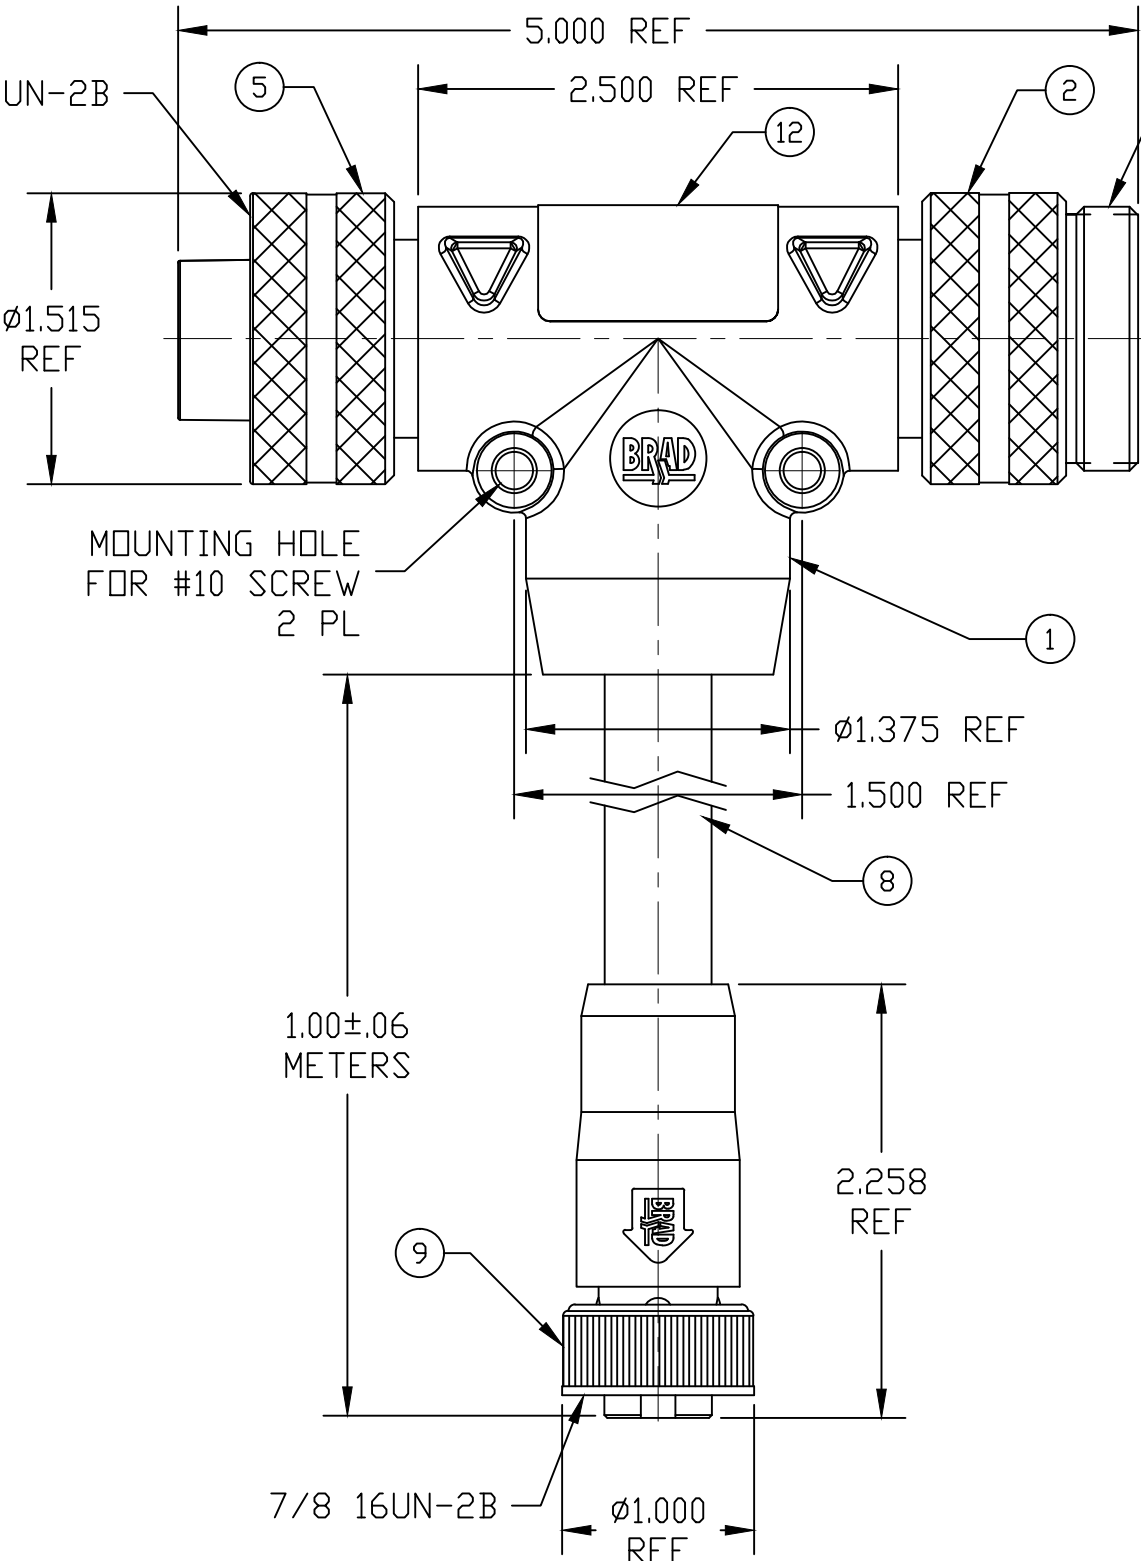
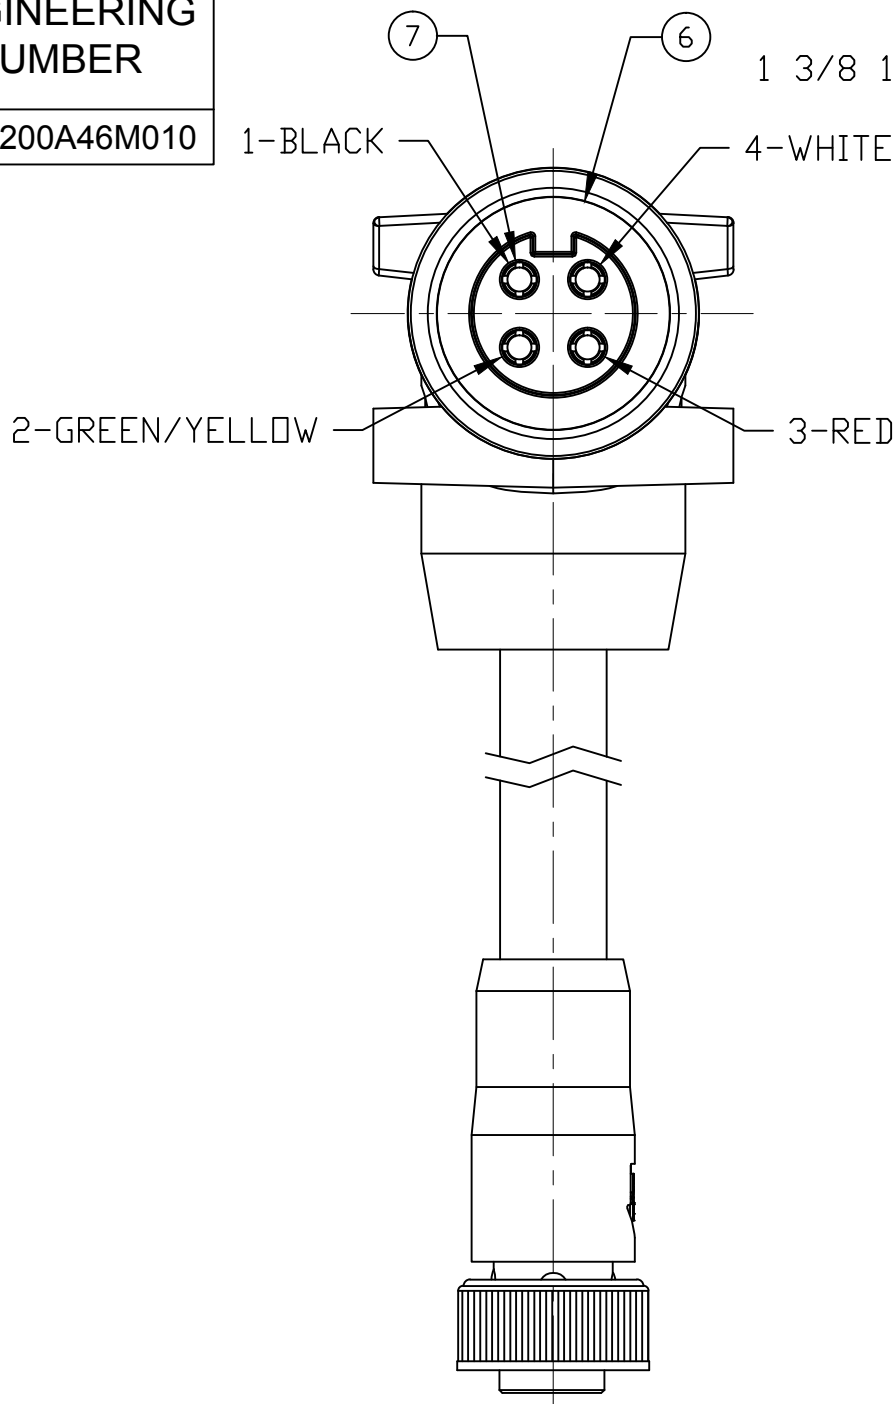


PART NUMBER	ENGINEERING NUMBER
1300680075	TC40200A46M010

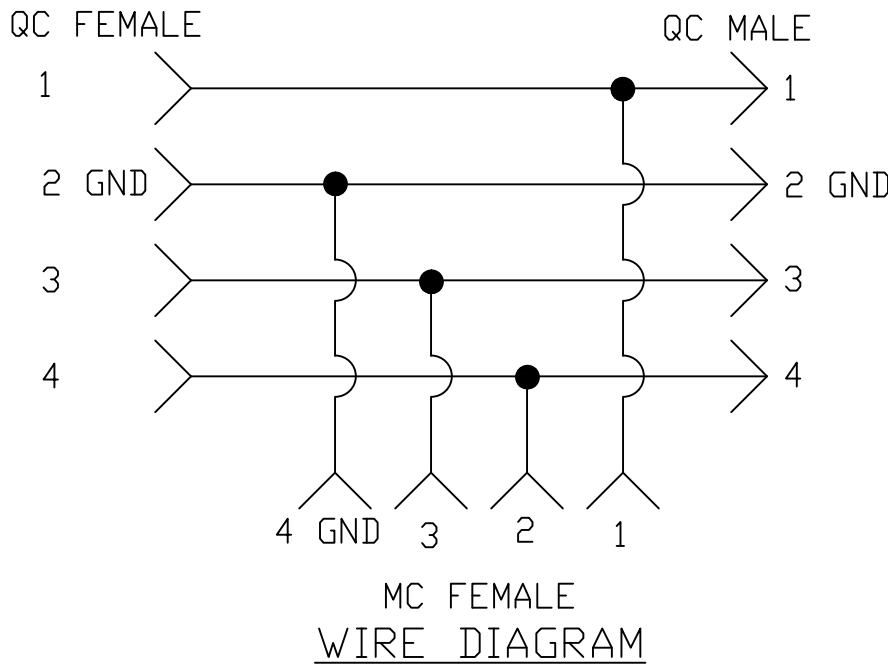

NOTES:
1. MATERIAL: AS NOTED
2. FINISH: AS NOTED
3. ELECTRICAL:
VOLTAGE: 480V PER IEC60664
600V PER UL2237
MAX THRU CURRENT: 32A
MAX DROP CURRENT: 15A (B)
4. TEMP RATING: -20° TO +90°C
5. PROTECTION: IP67 (WHEN MATED)
6. CERTIFICATION:
UL LISTED/CSA CERTIFIED FILE NO: E258922

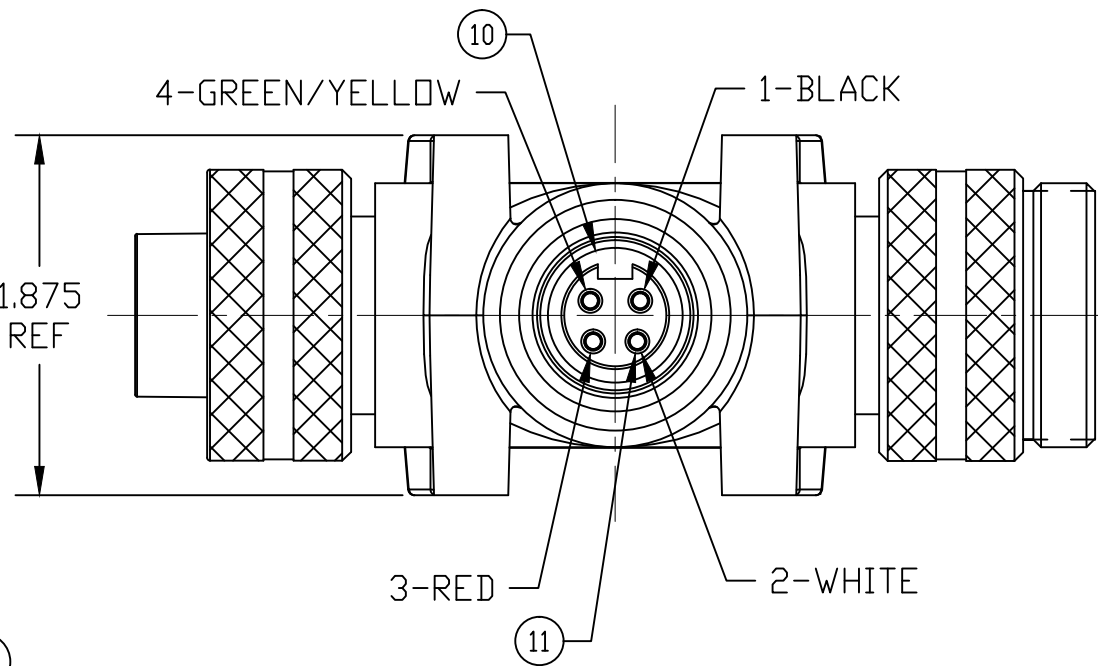

12	LABEL	POLYESTER	BLACK/ORANGE
11	MC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
10	MC FEMALE INSERT	PVC	BLACK
9	MC COUPLING NUT	ZINC ALLOY	BLACK E-COAT
8	CABLE, 14AWG-3 TYPE TC-ER, STDDW	PVC	GRAY
7	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	QC FEMALE INSERT	PVC	BLACK
5	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	QC MALE INSERT	PVC	BLACK
2	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	OVERMOLD	PVC	GRAY
ITEM	DESCRIPTION	MATERIAL	FINISH

(B)

REV'D NOTE 3
EC NO: ICG2017-0829
DRWN: RSTONE
CHKD: K COX
APPR: BWOODMAN
3/31/17
2017/03/10
2010/01/20

DESCRIPTION
REV

QUALITY SYMBOL
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES
3 PLACES
2 PLACES
1 PLACE
ANGULAR ±---°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
INCH
DRAWN BY
KJOZWIK
DATE
2010/01/18
CHECKED BY
BWOODMAN
DATE
2010/01/18
APPROVED BY
JFMURPHY
DATE
2010/01/20
MATERIAL NO.
SEE TABLE
SIZE
C

SCALE

DESIGN UNITS
INCH
THIRD ANGLE PROJECTION
BRAD POWER
QC 4 POLE TEE
W/4 POLE MC CBL DROP
MOLEX INCORPORATED
DOCUMENT NO.
SD-130068-016
SHEET NO.
1 OF 1