

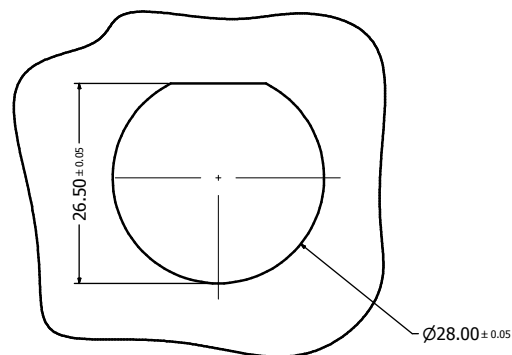
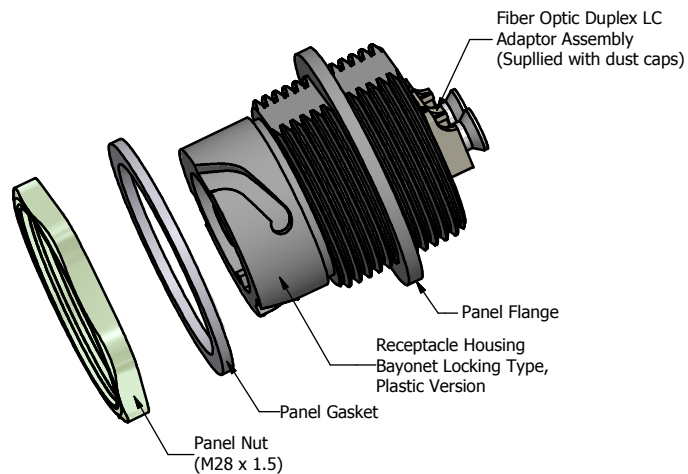

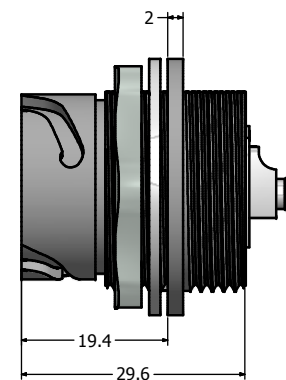


6 5 4 3 2 1

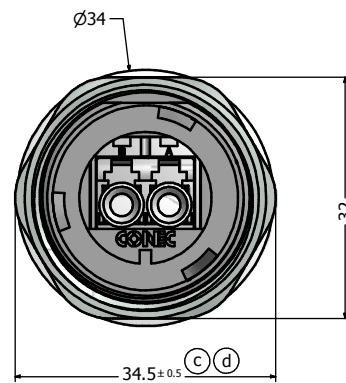

Recommended Panel Cutout (C)

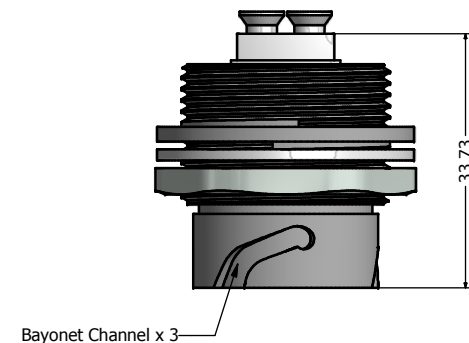

Notes:

1. Material and Finish:

- Receptacle Housing: Polyester (Black); UL94 V-0
- Panel Nut: Brass, Finish: Nickel Plated
- Panel Gasket: Silicone, Color: White
- Duplex LC Adaptor Assembly:
- Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green** (b)
- Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
- Dust Cap: PP, Color: Neutral transparent
- Operating Temperature: -40~C to +85~C

2. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

3. IP67 rated when covered or fully mated with the appropriate mating connector

(d) 4. Recommended Mounting Panel Nut torque is 20 to 25 lb-inch

Description	Part Number
Single Mode (SM)	17-300010
Multi Mode (MM)	17-300020
(C) APC Single Mode (APC SM)	17-300170

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1.5:1	Dim. in mm	
	Name	Title	Approval Date		0 PLC ±0.50 1 PLC ±0.38 2 PLC ±0.25 3 PLC ±0.10 ANGLES ±.3				Autodesk Inventor
					2008	Date	Name	Title: IP67 Industrial Duplex LC Receptacle Assembly Kit Plastic Version	
					Draw.	Jun. 06	Vincent Ke		
					Appd.	Jun. 06	J. Chaudry		
					Norm				
	d	3 x d	Sep/25/2013	Vincent Ke	D-old			Drawing No.: 17K1A002	DIN A3
	c	3 x c	Feb/25/2011	Vincent ke					
	b	1 x b	May/28/2009	Vincent Ke					
	a	original							
Rev.	Changes	Date	Name				Part No.: SEE PART NUMBER TABLE	Sheet 1/1	