
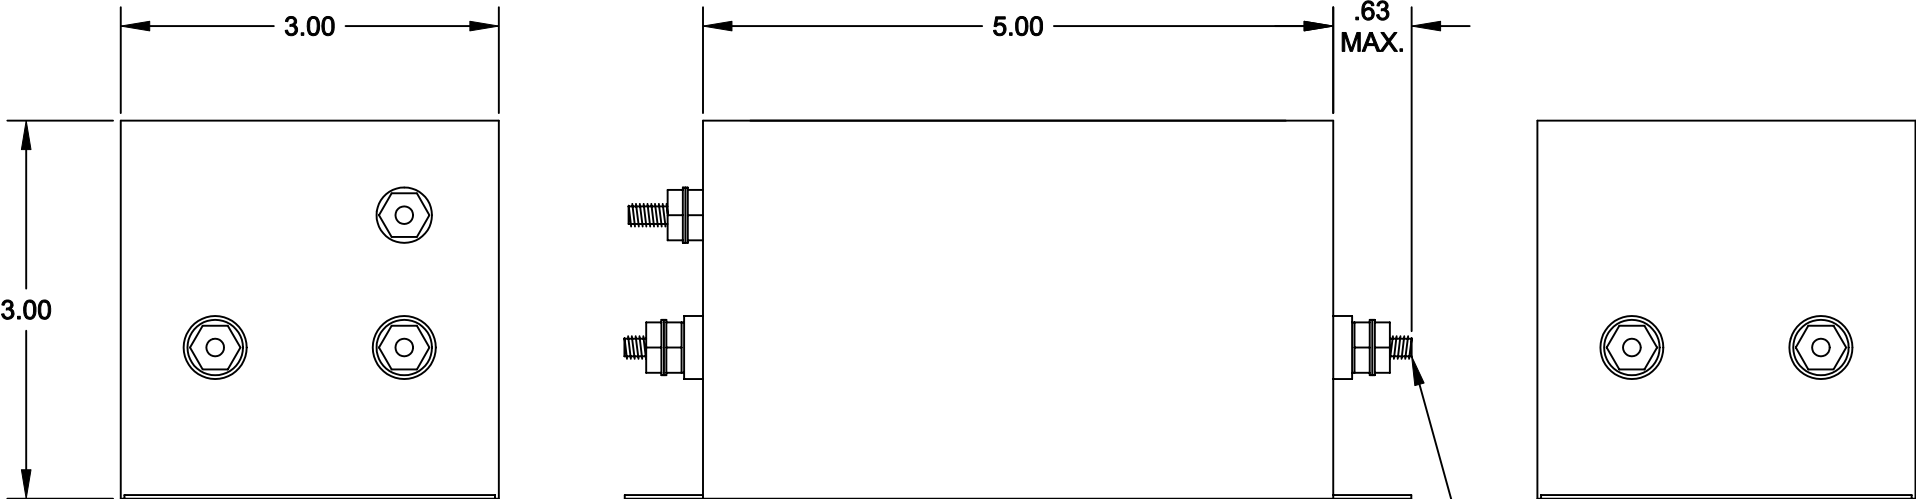


SPECIFICATIONS


1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
15A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
1.5mA @ 250VAC, 50Hz

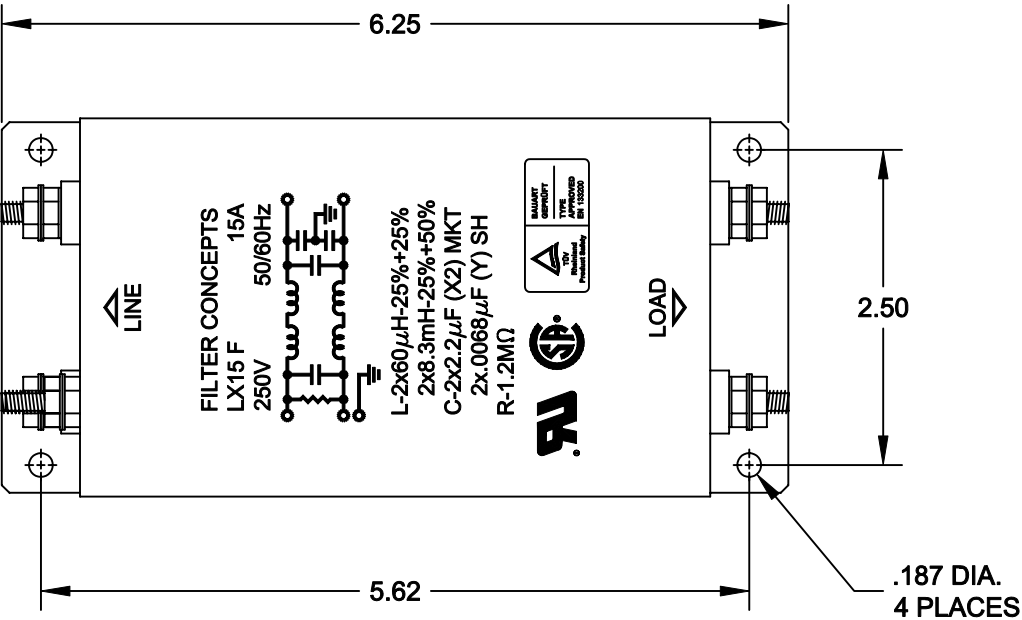

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	55 db	65 db	65 db	65 db	65 db	65 db
L/G	27 db	40 db	50 db	50 db	50 db	50 db

SCHEMATIC

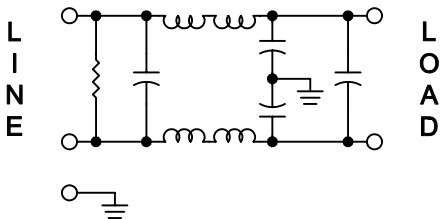

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

CONTRACT NO.

APPROVALS DATE
DRAWN GIANH TRINH 09-24-02
CHECKED DANNIEL VUONG 11-04-02

FINISH

FILTER CONCEPTS INC.

APPLICATION DRAWING
LX15 F FILTER

SIZE
B

CODE IDENT NO.

DRAWING NO.
7586

SCALE 2/3 SHEET 1 OF 1

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11-04-02	LE
B	REVISED MARKING	05-14-03	LE