
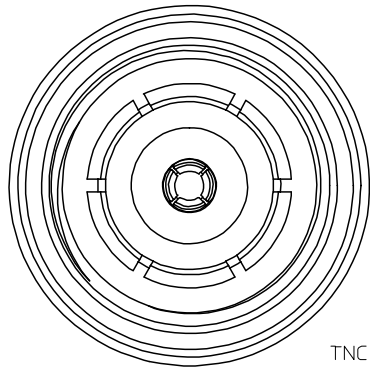


MATERIALS AND FINISHES


BODY, COUPLING NUT: BRASS
PLATED NICKEL

CONTACT: PHOSPHOR BRONZE
PLATED GOLD

INSULATOR: TEFLON




TNC PLUG
POLARIZED
INTERFACE

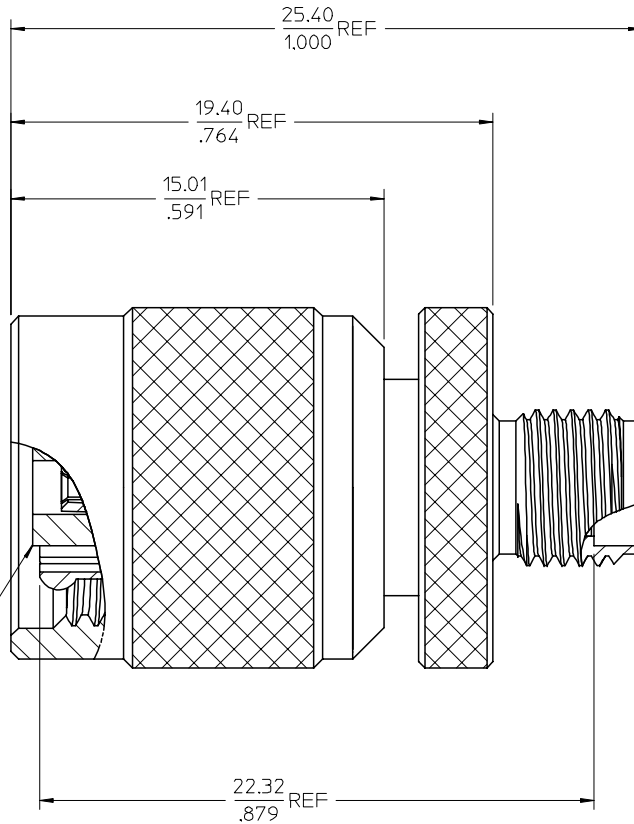

Ø 14.50 REF
.571

SMA JACK
INTERFACE

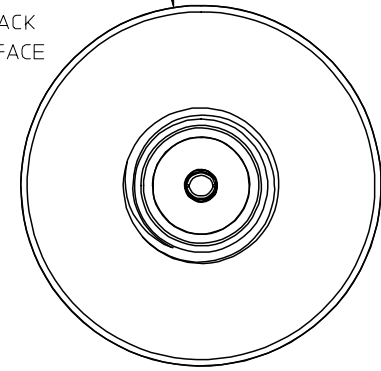

MIL-STD-348A, FIG. 310.2

INTERFACE SMA

SPECIFICATION

DESCRIPTION

CHG: RELEASE
DRAWING.

FC NO: URF2008-0094
DRAWN: ARROBERTSON 2007/08/13
CHKD: 2007/08/13
APPR: JIM ENEER 2007/08/13

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .004	± .0001
3 PLACES	± .005	± .0002
2 PLACES	± .007	± .0003
1 PLACE	± .010	± .0004

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY DATE
AZR 2008/08/08
CHECKED BY DATE
SSS 2008/08/08
APPROVED BY DATE
JDW 2008/08/08

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

BSA, TNC PLUG POLARIZED
TO SMA JACK 50 OHMS
BSA-TNC/SMA, EWR-3415

molex MOLEX INCORPORATED

MATERIAL NO.
733861250

DOCUMENT NO.
SD-73386-125

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION