




Innovative **Technology**
for a **Connected** World

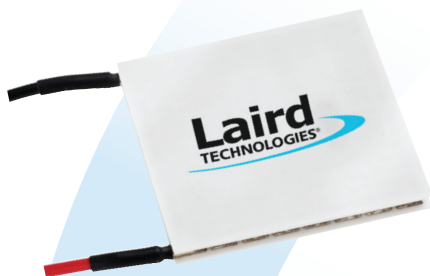

Ceramic Plate Series CP14,71,10,45

Thermoelectric Modules

The Ceramic Plate (CP) Series of Thermoelectric Modules (TEMs) is considered 'the standard' in the thermoelectric industry.

This broad product line of high-performance and highly reliable TEMs is available in numerous heat pumping capacities, geometric shapes, and input power ranges. Assembled with Bismuth Telluride semiconductor material and thermally conductive Aluminum Oxide ceramics, the CP Series is designed for higher current and large heat-pumping applications.

FEATURES

- Precise Temperature Control
- Compact Geometric Sizes
- Reliable Solid State Operation
- No Sound or Vibration
- Environmentally Friendly
- DC Operation
- RoHS Compliant

APPLICATIONS

- Medical Lasers
- Lab Science Instrumentation
- Clinical Diagnostic Systems
- Photonics Laser Systems
- Electronic Enclosure Cooling
- Food & Beverage Cooling
- Chillers (Liquid Cooling)

PERFORMANCE SPECIFICATIONS

| | | |
|---------------------------|------|------|
| Hot Side Temperature (°C) | 25°C | 50°C |
| Qmax (Watts) | 41.3 | 45.4 |
| Delta Tmax (°C) | 67 | 75 |
| I _{max} (Amps) | 8.5 | 8.5 |
| V _{max} (Volts) | 8.0 | 9.0 |
| Module Resistance (Ohms) | 0.87 | 0.98 |

| SUFFIX | THICKNESS (PRIOR TO TINNING) | FLATNESS & PARALLELISM | HOT FACE | COLD FACE | Lead Length |
|--------|---------------------------------|---------------------------|-------------|--------------|----------------|
| L | 0.131" ± 0.010" | 0.0015" / 0.0015" | Lapped | Lapped | 4.5" |
| L1 | 0.131" ± 0.001" | 0.001" / 0.001" | Lapped | Lapped | 4.5" |
| L2 | 0.131" ± 0.0005" | 0.0005" / 0.0005" | Lapped | Lapped | 4.5" |
| ML | 0.135" ± 0.010" | 0.002" / 0.002" | Metallized | Lapped | 4.5" |
| LM | 0.135" ± 0.010" | 0.002" / 0.002" | Lapped | Metallized | 4.5" |
| MM | 0.139" ± 0.010" | 0.002" / 0.002" | Metallized | Metallized | 4.5" |

SEALING OPTION

| SUFFIX | SEALANT | COLOR | TEMP RANGE | DESCRIPTION |
|--------|---------|-------|---------------|--|
| RT | RTV | White | -60 to 204 °C | Non-corrosive, silicone adhesive sealant |
| EP | Epoxy | Black | -55 to 150 °C | Low density syntactic foam epoxy encapsulant |

global solutions: local support™

Americas: +1 888.246.9050

Europe: +46.31.420530

Asia: +86.755.2714.1166



clv.customerpos@lairdtech.com

www.lairdtech.com

Ceramic Plate Series CP14,71,10,45

Thermoelectric Modules

Performance Curves at $T_h = 25^\circ\text{C}$

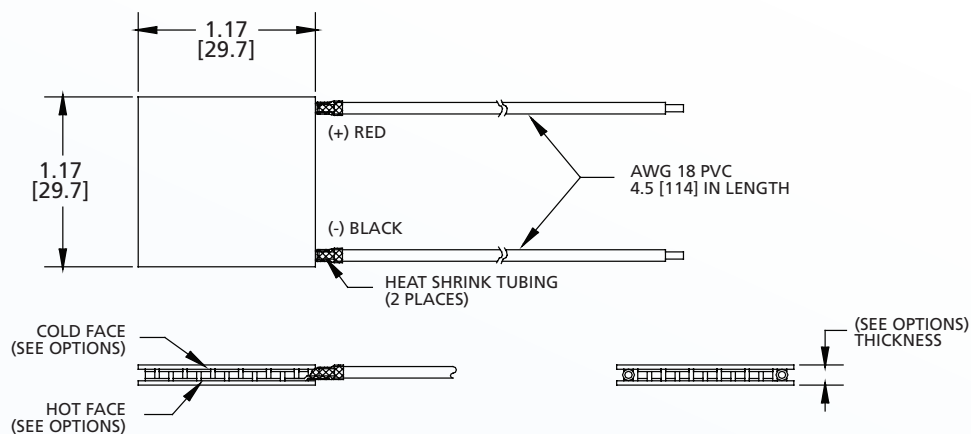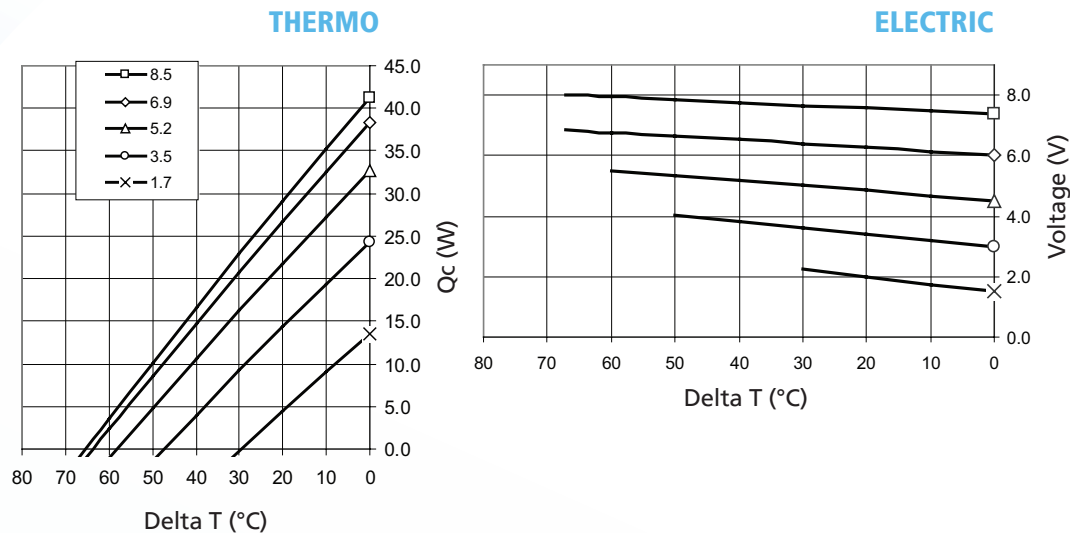

Ceramic Material: Alumina (Al_2O_3)
Solder Construction: 138°C , Bismuth Tin (BiSn)

OPERATING TIPS

- Max Operating Temperature: 80°C
- Do not exceed I_{max} or V_{max} when operating module
- Reference assembly guidelines for recommended installation
- Solder tinning also available on metallized ceramics

THR-DS-CP14,71,10,45 0709

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2009 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.