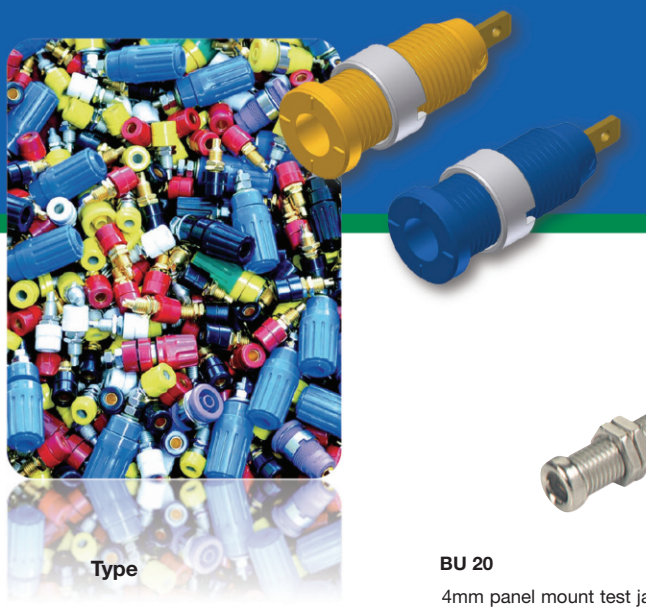

Test Jacks
4 mm System

Type	BU 20	BIL 20 / BIL 20 Au
	4mm panel mount test jack, nickel plated brass, M6 thread screw/ solder terminal. max. panel thickness 13.5mm	4mm panel mount test jack, tin/ gold plated brass, M6 thread screw/ solder terminal, max. panel thickness 2mm
Pin Diameter	4 mm	4 mm
PART NO. / Housing color	**930177000**	Nickel Plated / Gold Plated
		● **930176100** / ● **930176700**
		● **930176101** / ● **930176701**
		● **930176102** / ● **930176702**
		● **930176103** / ● **930176703**
		● **930176104** / ● **930176704**
		● **930176105** / ● **930176705**
		● **930176106** / ● **930176706**
		○ **930176107** / ○ **930176707**
		● **930176109** / ● **930176709**

Technical Data		
Contact Type	jack Ø 4 mm	jack Ø 4 mm
Connection Type	M6 thread, solder terminal	M6 thread, solder terminal
Voltage Rating	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurement Category (IEC61010)	CAT I	CAT I
Current Rating*	16 A	32 A
Contact Resistance	5 mOhm	5 mOhm
Mounting Type	screw thread M6	screw thread M6
Material Specifications		
Jack Body	nickel plated brass	tin / gold plated brass
Contact Spring	nickel	–
Housing	–	Polyamide
Environmental Conditions		
Temperature Range	-25°C to +70 °C (-13 to 158°F)	-25°C to +70 °C (-13 to 158°F)
Flamability Rating		
Housing	–	UL 94 V-2

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

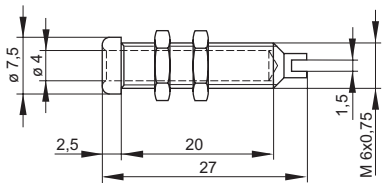

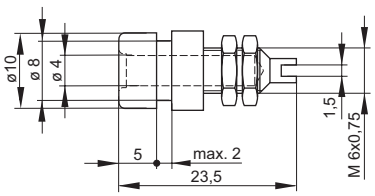

* Please consider derating graph on page 80.