
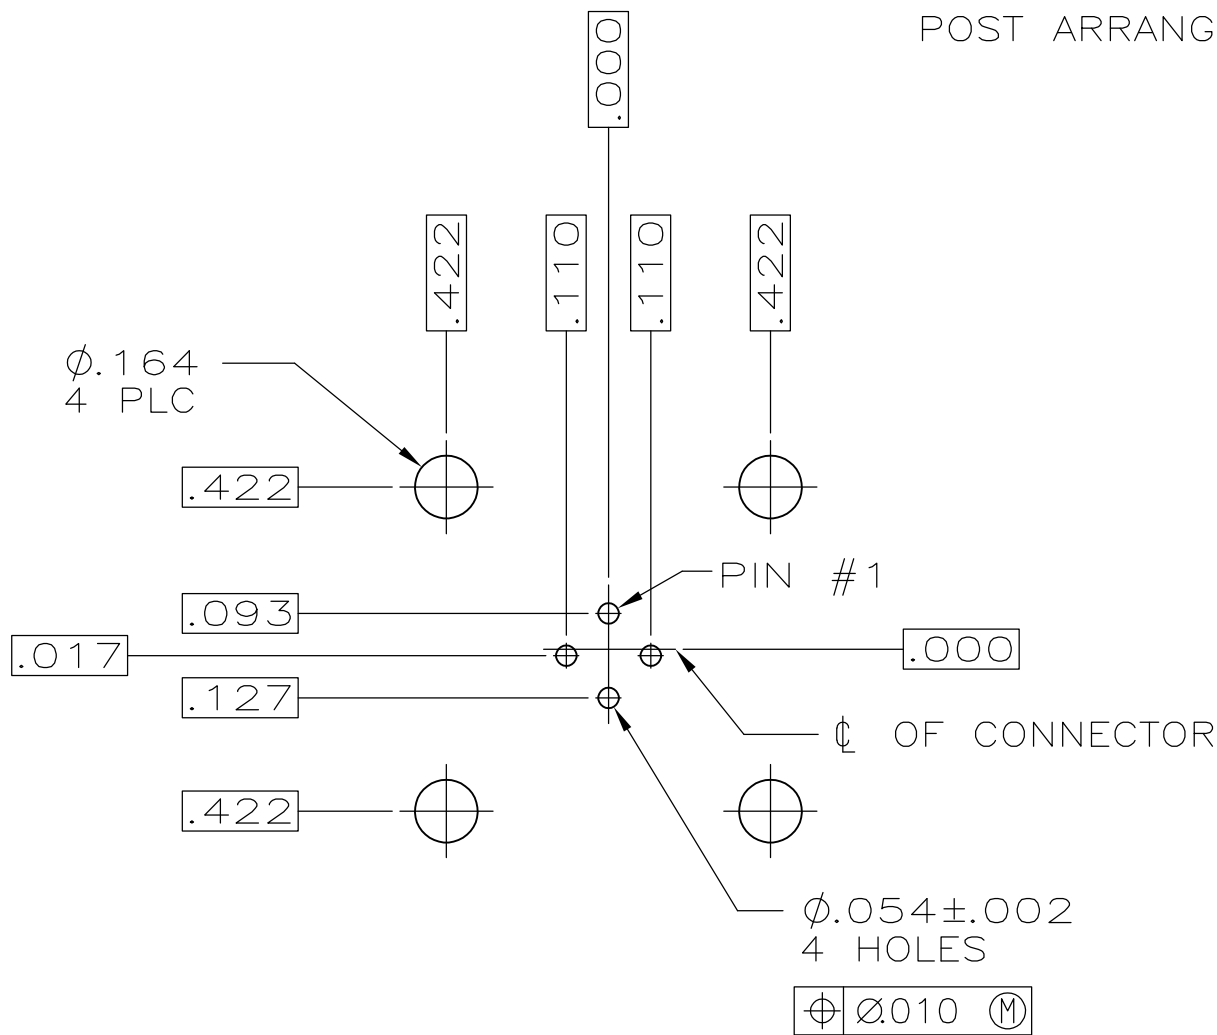
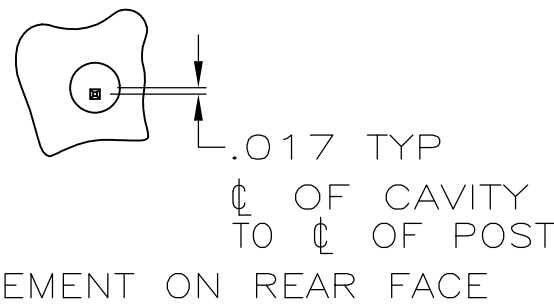
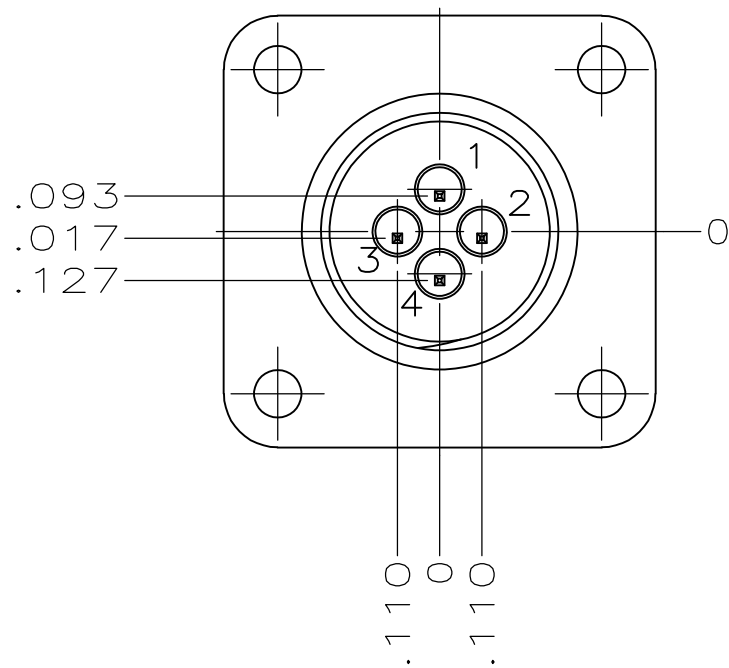
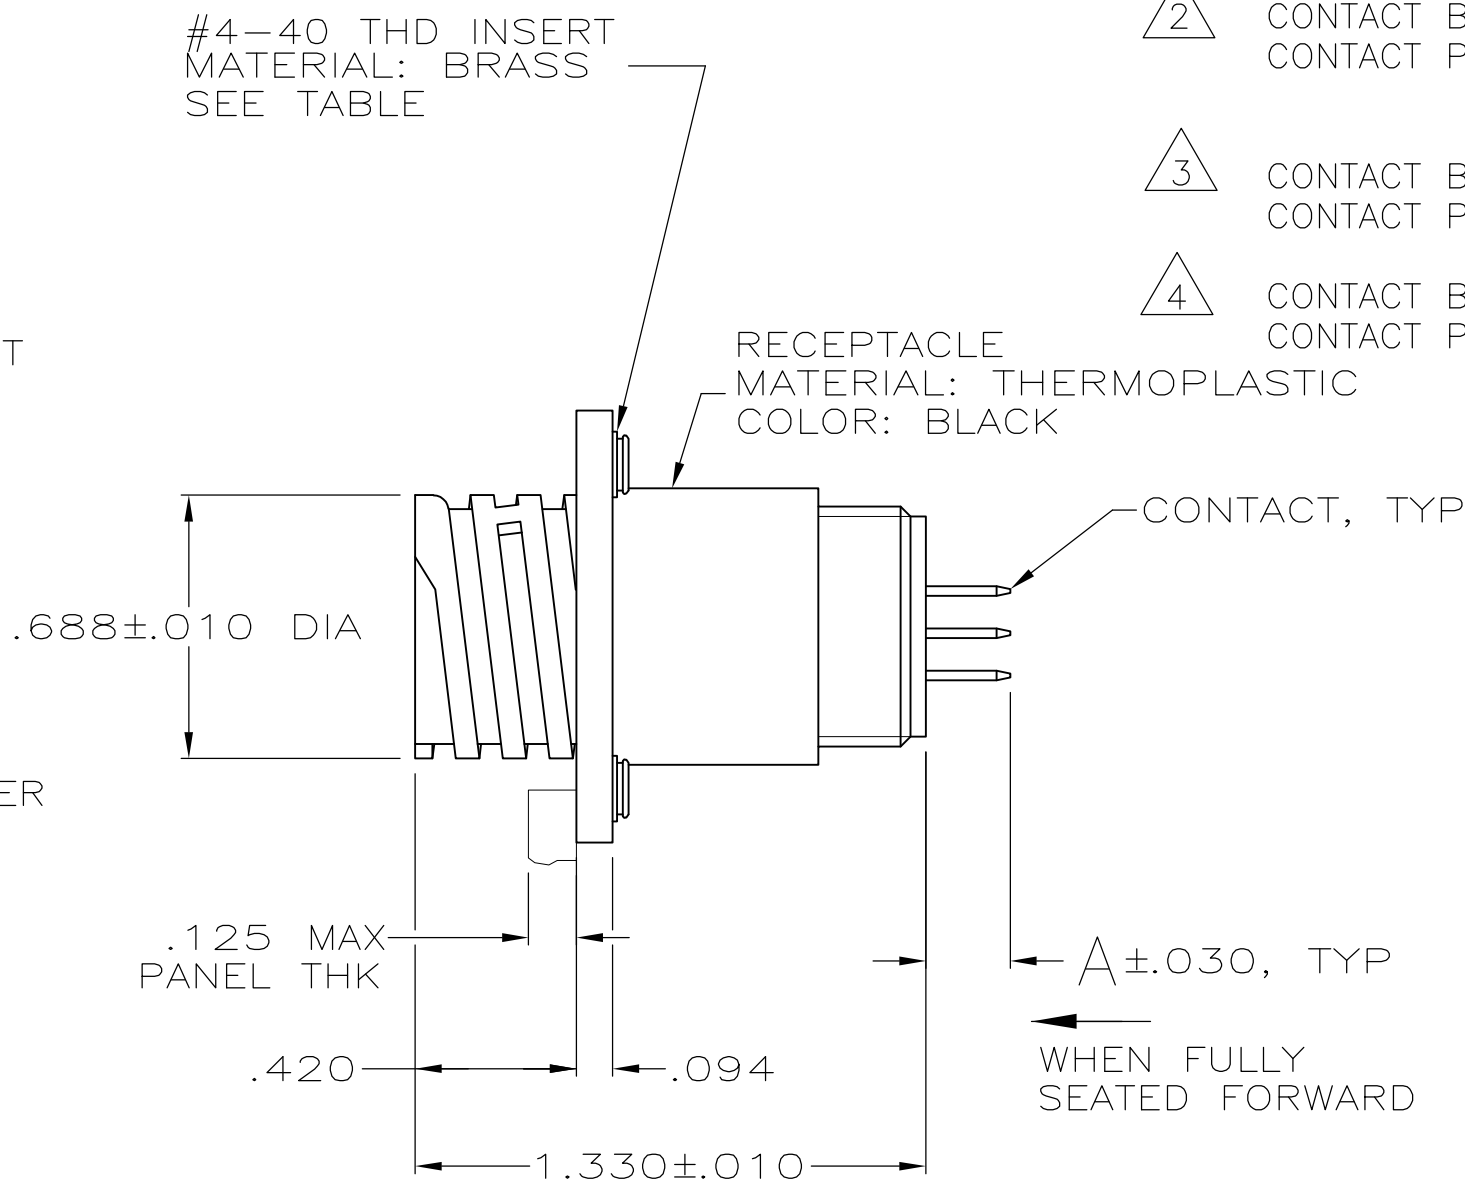


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
S		REVISED PER ECO-17-004657	05APR2017	RS	MZ

- 1
- RECEPTACLE IS LOADED WITH 4 TYPE III+ POSTED PIN CONTACTS.
- 2
- CONTACT BODY: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
CONTACT POST: TIN-LEAD PER MIL-T-10727 OVER COPPER PER MIL-C-14550A.
- 3
- CONTACT BODY: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
CONTACT POST: TIN OVER COPPER PER MIL-C-14550A.
- 4
- CONTACT BODY: TIN OVER NICKEL PER MIL-C-14550A
CONTACT POST: TIN OVER NICKEL PER MIL-C-14550A

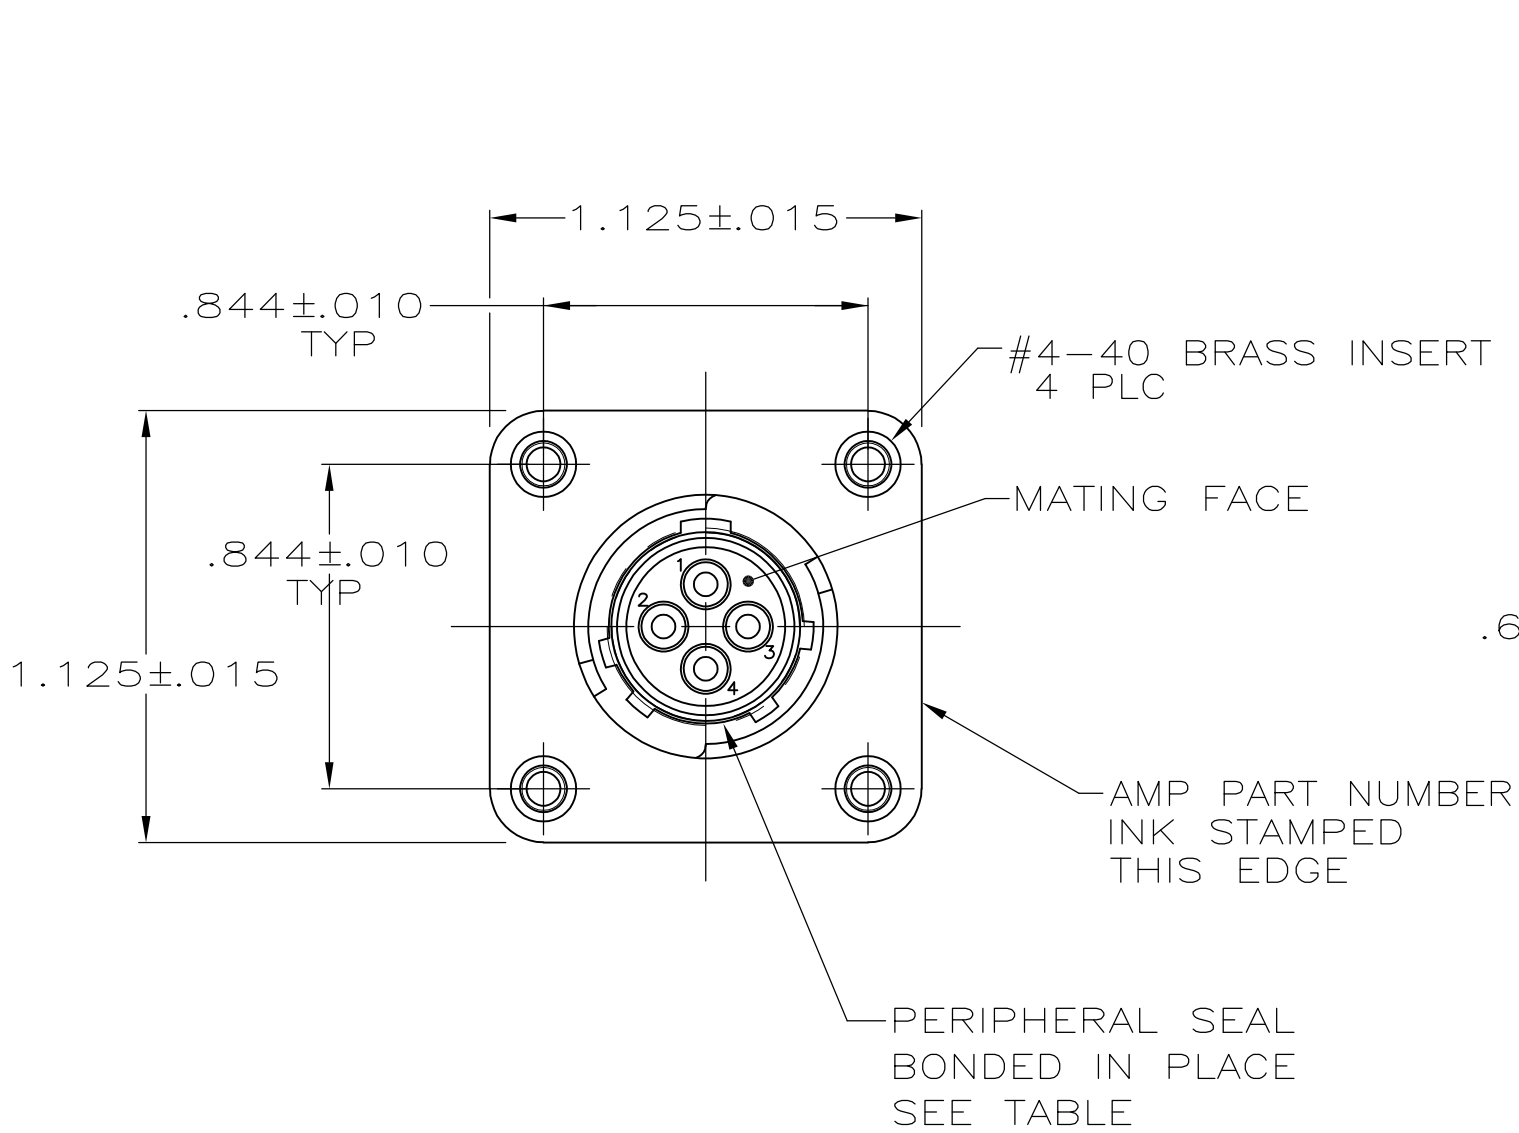

RECOMMENDED P.C. BOARD LAYOUT

	3	.220	YES	NO	1-207825-5
OBSOLETE	4	.429	YES	YES	1-207825-4
OBSOLETE	3	.119	NO	NO	1-207825-2
	4	.618	NO	YES	1-207825-1
OBSOLETE	3	.119	YES	YES	1-207825-0
	3	.119	NO	YES	207825-9
OBSOLETE	2	.220	YES	NO	207825-8
OBSOLETE	2	.429	YES	YES	207825-7
	2	.119	NO	NO	207825-6
OBSOLETE	2	.119	NO	NO	207825-5
OBSOLETE	2	.618	NO	YES	207825-4
OBSOLETE	2	.119	YES	YES	207825-3
OBSOLETE	2	.220	NO	YES	207825-2
	2	.119	NO	YES	207825-1
CONTACT FINISH		A	PERIPHERAL SEAL	THREADED INSERTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.LEE BG 7-1-91	 TE Connectivity				
DIMENSIONS: INCHES		CHK W.G.LENKER 4-14-92					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, POSTED, STD SEX, SERIES 1, 11-4, CPC				
	0 PLC ± -	APVD -					
	1 PLC ± -	PRODUCT SPEC 108-10024					
	2 PLC ± -	APPLICATION SPEC					
	3 PLC ± .005						
4 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL -	FINISH	WEIGHT -	A2	00779	C=207825	-	
CONTACT: 		CUSTOMER DRAWING			SCALE 2:1	SHEET 1 of 1	REV S