



SPECIFICATIONS

- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
3 x 30A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO NEUTRAL: 2.2KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.4mA @ 250VAC, 50Hz

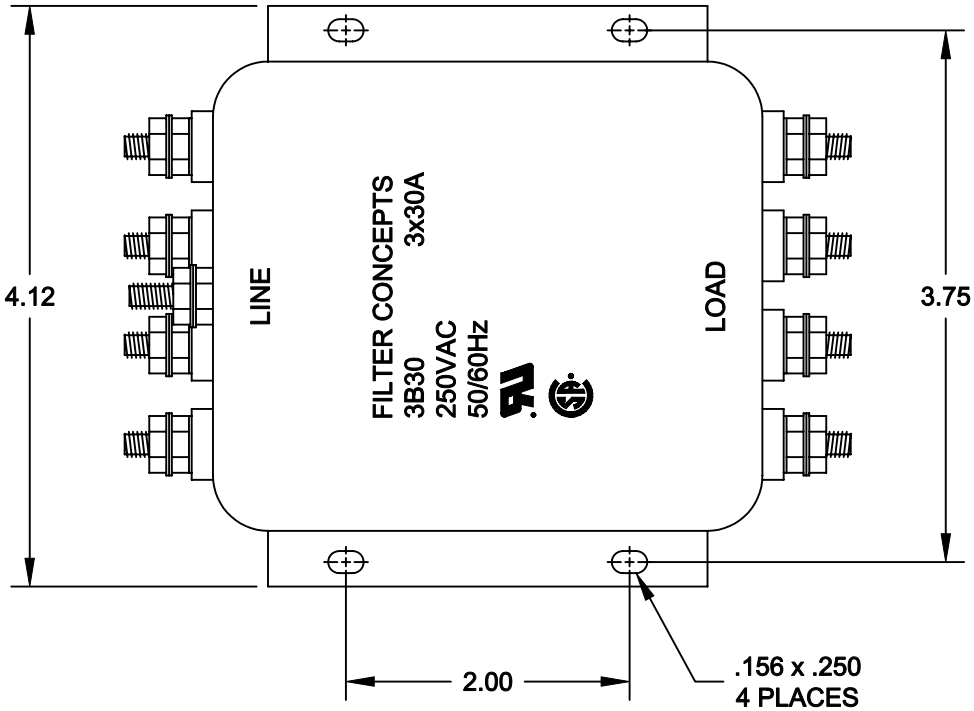


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03-01-91	GD

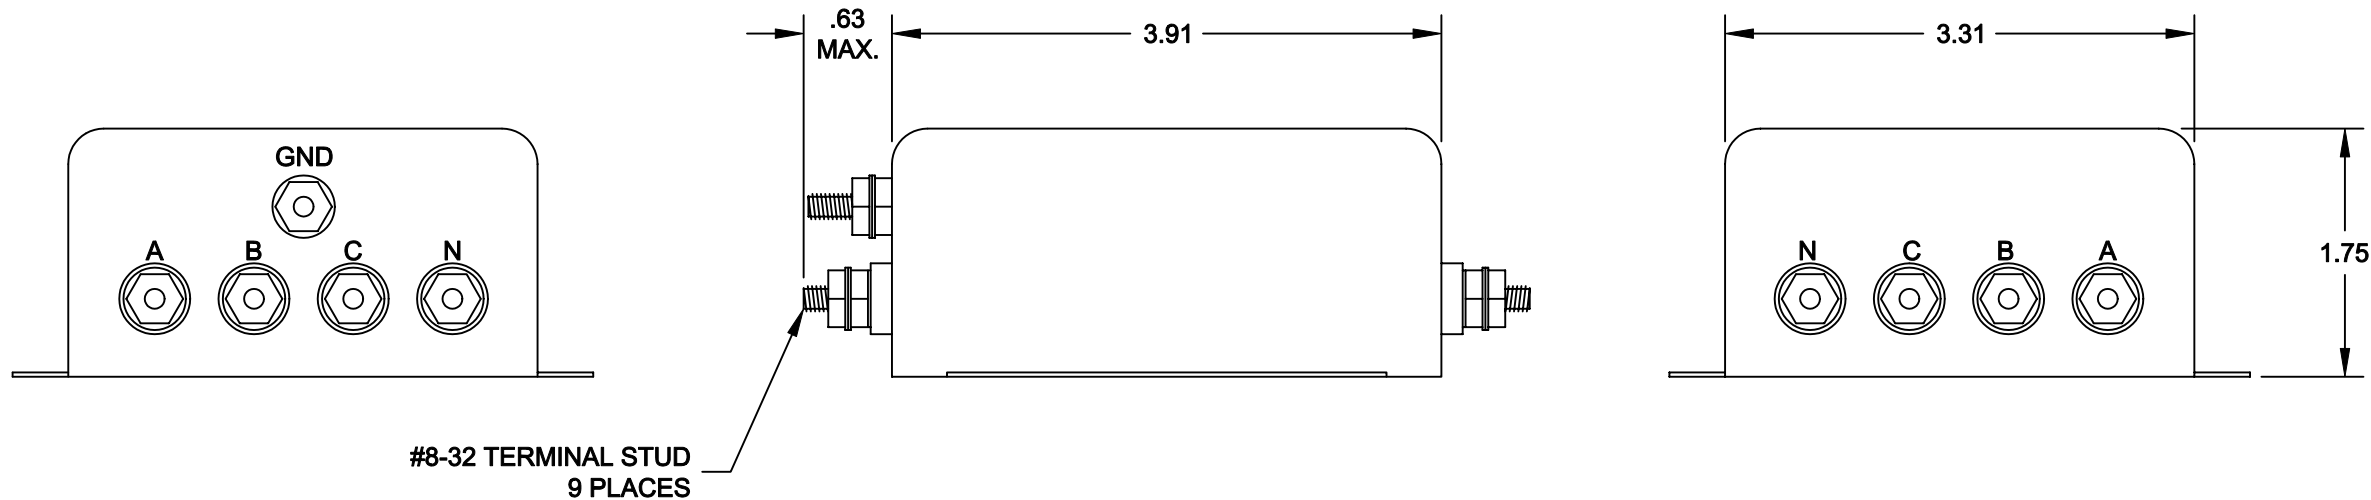

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/N	12 db	20 db	40 db	60 db	50 db	50 db
L/G	4 db	18 db	38 db	44 db	50 db	50 db

SCHEMATIC

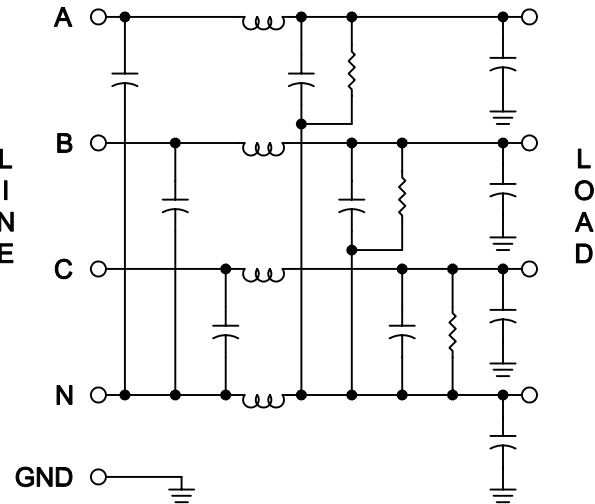

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.		
	APPROVALS	DATE			
MATERIAL	DRAWN MG	03-01-91	APPLICATION DRAWING 3B30 FILTER		
	CHECKED				
			SIZE B	CODE IDENT NO.	DRAWING NO. 7151
FINISH			SCALE 3/4		SHEET 1 OF 1
NEXT ASSY	USED ON				
APPLICATION					