

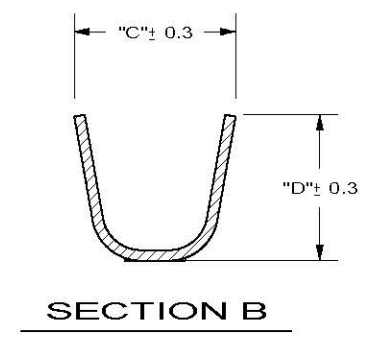

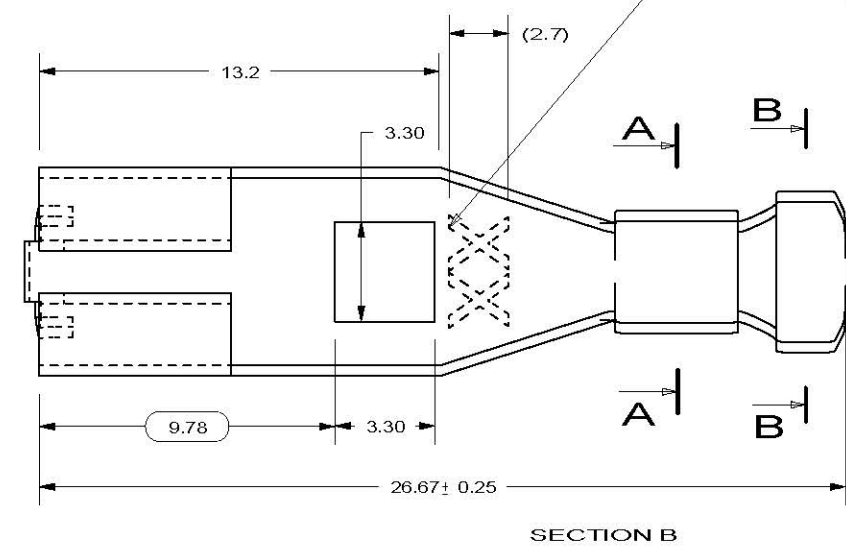
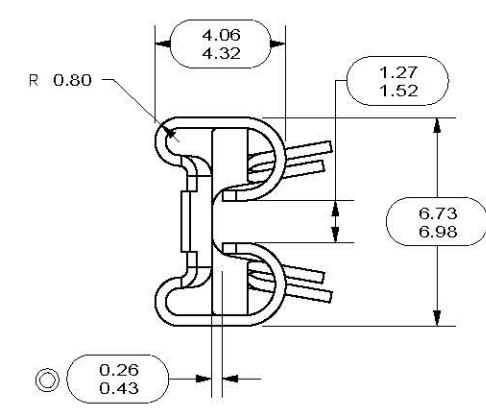



LTR	DATE	REVISION	CHK	APD
A	12/09/11	503915ERA NEW RELEASED EJIN		

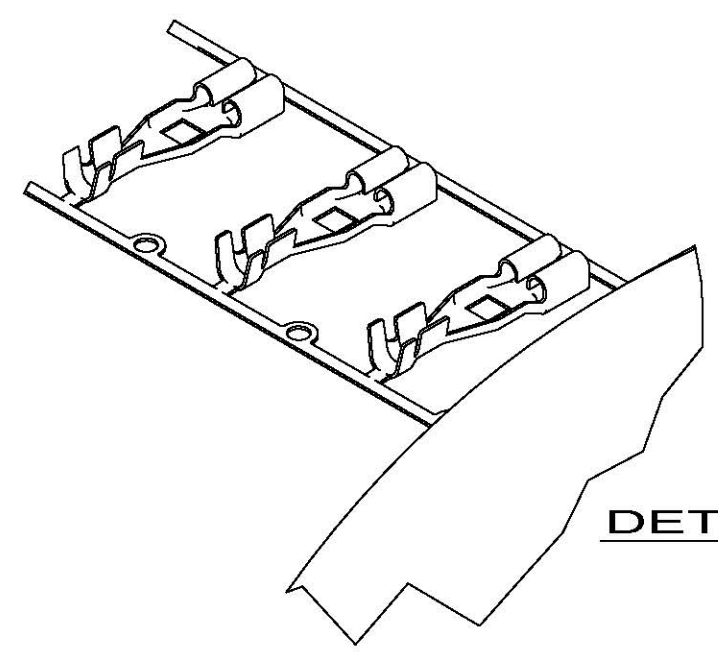



STEEL STAMP NUMBERS
PER TABLE GAGE SIZE I.D.
PUNCHES VARY IN SIZE
LOCATION OF STAMP
NOT CARRIER

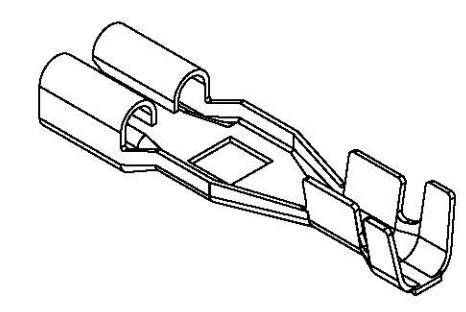

DETAIL C

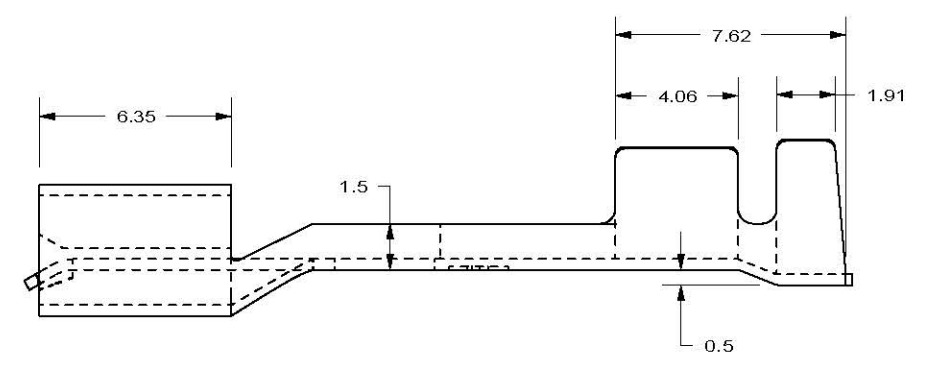

REEL DETAIL

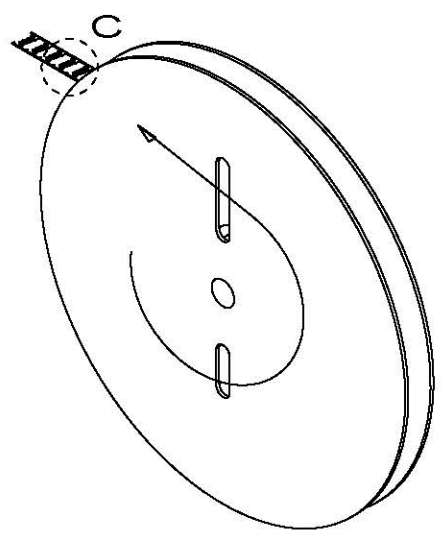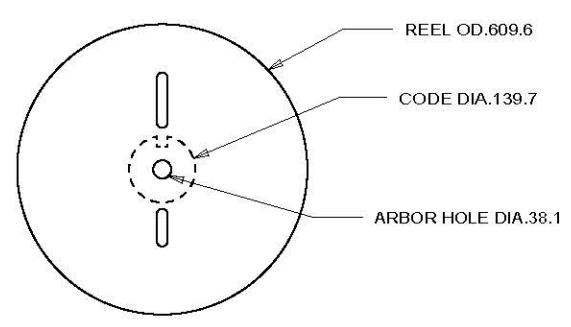

LITTELFUSE PART NO.	REELED	PAPER INTERLEAF	WIRE GAUGE	GRIP TYPE-1			
				A	B	C	D
913-007	YES	YES	10	5.30	5.08	7.80	6.10
913-008	YES	YES	14	4.06	4.06	5.33	4.83

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
TOLERANCE
DECIMALS ANGULAR
X ± 0.25 ± 1°
XX ± 0.12
DO NOT SCALE DRAWING

METRIC
COMPONENT

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
⊙	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE			
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS			
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE			
COPIES TO		MATL SPEC		
1	9	18	SEE NOTE	
2	10	19	FINISH	
3	12	20	SEE NOTE	
4	13	21	DRW	EJIN
5	14	23	DATE	12/09/11
6	15	33	SCALE	4:1
7	16	43	CHK	DATE
8	17	53	APPD	DATE
			FINSH GOOD WT	GRAMS/PIECE
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-TH)				
DIMENSION	0.5 - 3	3 - 6	6 - 30	30 - 120
TOLERANCE	± 0.10	± 0.15	± 0.20	± 0.30
3RD ANGLE PROJECTION		TITLE		
		CRIMP TERMINAL WITH INSULATION GRIP		
Littelfuse		REVISION	DRWG. NO.	
DES PLAINES, ILLINOIS 60016		A	913-007	

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED