
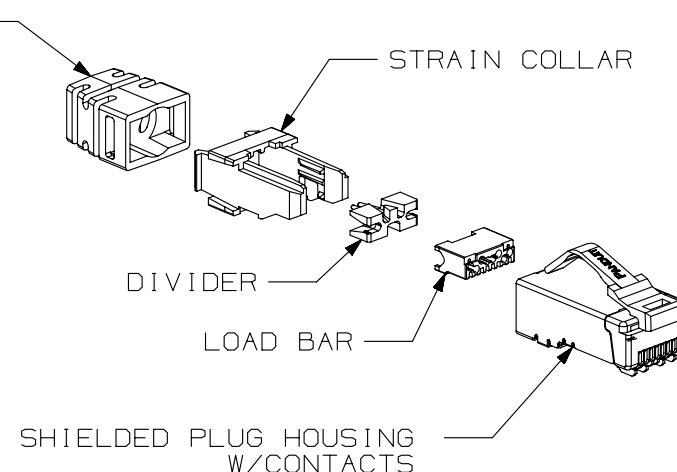




NOTES :

NOTES:

1. MATERIAL: HOUSING, LOAD BAR, DIVIDER, STRAIN COLLAR -  THERMOPLASTIC UL94V-0 RATED; STRAIN RELIEF BOOT - TPE-UL94-HB RATED; CONTACT TERMINAL - PHOSPHOR BRONZE ELECTRO-POLISHED AND PLATED WITH .000050" MIN. GOLD IN MATING AREA, GOLD FLASH OVER REMAINDER, .000100" MIN. NICKEL UNDERPLATE; SHIELD - CARTRIDGE BRASS WITH NICKEL PLATING.
2. PLUG ACCEPTS 4 PAIR CABLE .225-.250" DIA. WITH 24-26 AWG CONDUCTOR WITH A MAXIMUM INSULATOR DIAMETER OF .040".
3. MEETS DIMENSIONAL REQUIREMENTS OF FCC PART 68 AND IEC 60603-7. ALL DIMENSIONS MAXIMUM UNLESS OTHERWISE SPECIFIED.
4. TERMINATED CONTACT HEIGHT DIMENSION: .237±.005".
5. PACKAGE QUANTITY= 100
6. RATED FOR 2500 MATING CYCLES.
7. UL AND CSA LISTED.



PART NUMBER		SPS688 - C			
TITLE					
CATEGORY 6 SHIELDED MODULAR PLUG					
CUSTOMER DRAWING					
ITEM REVISION NAME		M02085BA/27			
DATASET FILE NAME		M02085BA_DC02/27C			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .010 [.3] .XX ± .03 [.8] ANGLES ±				MATERIAL : SEE NOTES	
		THIRD ANGLE PROJECTION		DRAWING NUMBER: 02085-02	
DRAWN BY	DATE	CHK	SCALE	SIZE	
MDJR	11-30-04	PBD	NONE	SHT 1 OF 1	
				A	

010100DA/14