

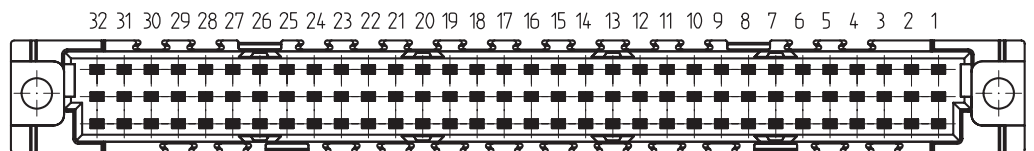


Bestückungsplan / contact layout

■ bestückt / assembled

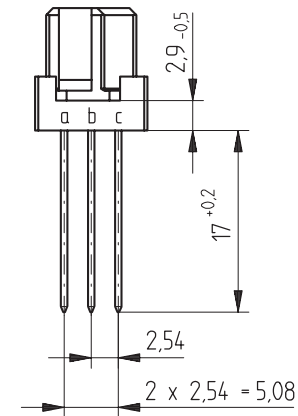

Leiterplatten-Lochbild / PCB drillhole pattern

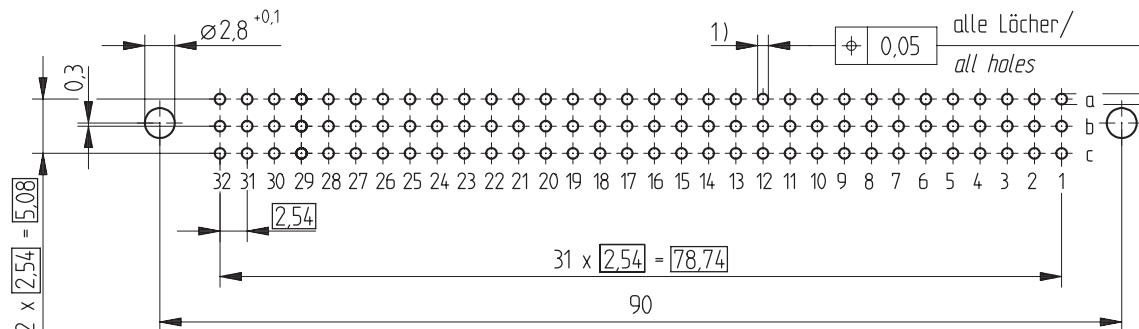

Elastische Einpresszone mit Übergabesteckzone /
compliant pressfit zone with mating transfer zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles


Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6

diameter of drilled hole see drawing 164062/Nr.6

- 1) $\varnothing 1,0 \pm 0,09$ Durchmesser des metallisierten Loches
 $\varnothing 1,0 \pm 0,09$ Diameter of finished plated-through hole
- $\varnothing 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches
 $\varnothing 1,15 \pm 0,025$ Diameter of drilled hole

| | | | | | |
|---|--|--|---|------------------------------|-----|
| Information: | | Tolerances |  | Scale | 2:1 |
| All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | | Subject to modification without prior notice. Drawing will not be updated. | | Designation | |
| a | | 18.04.2007 | | Federleiste C 96 EE | |
| Index | | Date | | Fem. Connector C 96 Pressfit | |
| | | H:00061690.SZA | | 244295 | |
| | | | | STVC | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[244295](#)