

REV. 0


DCO 17683

COIL: @ 25°C	
RESISTANCE	310 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.6 VDC
MUST RELEASE	3.35 VDC MAX, 0.55 VDC MIN

ENVIRONMENT:	
VIBRATION	10 Hz TO 2500 Hz @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX  
 RELEASE 5 MS MAX  
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

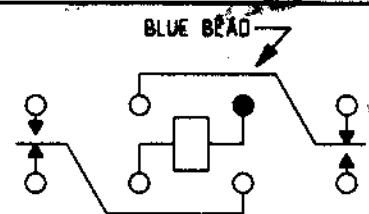

TERMINAL VIEW

CONTACT RATING:	2 AMPS 28 VDC
	0.1 AMP 115 VAC RESISTIVE 0.5 AMPS
	28 VDC INDUCTIVE 100,000 OPERATIONS

DR. B.D. 02JUL03 CK. *WBS 7/2/03*

**CII Technologies**  
 advanced control electronic solutions

CUST. QPL  
 CUST. NO. M39016/44-026L REV. \_\_\_\_\_

"HMS" RELAY

HMS1201S110L