



### Main

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Range of product                   | Harmony XVB Universal             |
| Product or component type          | Indicator bank                    |
| Beacon or indicator bank unit type | illuminated unit                  |
| Signalling type                    | Flashing                          |
| Mounting diameter                  | 2.76 in (70 mm)                   |
| Component name                     | XVBC                              |
| Material                           | Polycarbonate                     |
| Light source                       | Red integral flash discharge tube |
| Bulb type                          | Flash discharge tube              |
| [Us] rated supply voltage          | 24 V AC/DC                        |
| Flash energy                       | 5 J                               |

### Complementary

|  |   |
|--|---|
| Assembly style                         | Customer assembly, up to 5 units  |
| Connections - terminals                | Screw clamp terminals : $\leq 1 \times 1.5 \text{ mm}^2$ with cable end |
| [Ui] rated insulation voltage          | 250 V conforming to IEC 60947-1   |
| Nominal voltage limit                  | 0.85...1.1 $U_n$ conforming to IEC 60947-5-1                            |
| Current consumption                    | < 350 mA DC<br>< 550 mA AC  |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1  |
| Flashing frequency                     | 1 Hz  |
| CAD overall width                      | 2.76 in (70 mm)   |
| CAD overall height                     | 6.18 in (157 mm)  |
| CAD overall depth                      | 2.76 in (70 mm)   |
| Product weight                         | 0.65 lb(US) (0.295 kg)  |

### Environment

|                                     |  |
|-------------------------------------|--|
| product certifications              | CCC<br>CSA C22-2 No 14<br>GOST<br>UL 508   |
| standards                           | EN/IEC 60947-5-1   |
| protective treatment                | TC   |
| ambient air temperature for storage | -40...158 °F (-40...70 °C)   |
| electrical shock protection class   | Class I on support tube conforming to IEC 61140<br>Class II on base unit conforming to IEC 61140 |
| IP degree of protection             | IP65 on fixing base XVBZ0. conforming to IEC 60529<br>IP66 on base unit conforming to IEC 60529  |
| NEMA degree of protection           | NEMA 4X indoor conforming to UL 508  |

### Offer Sustainability

|  |  |
|--|--|
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |


### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Indicator Bank with “Flash” Discharge Tube Unit

### Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

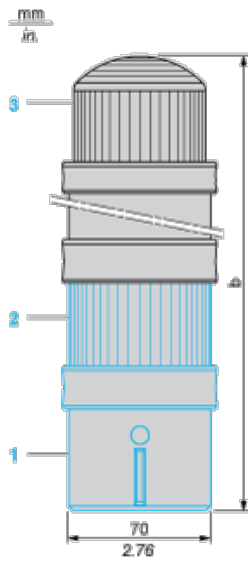

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) “Flash” unit

| Number of illuminated or audible signalling units other than “flash” tube | b in mm | b in in. |
|---|---------|----------|
| 1   | 295     | 11.61    |
| 2   | 358     | 14.09    |
| 3   | 421     | 16.57    |
| 4   | 484     | 19.06    |