

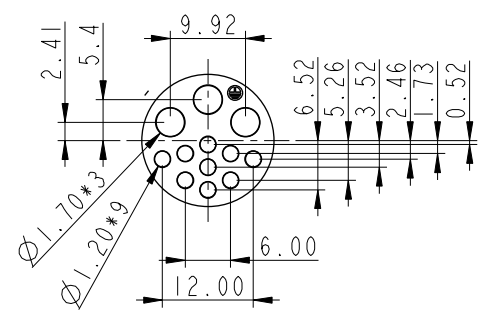


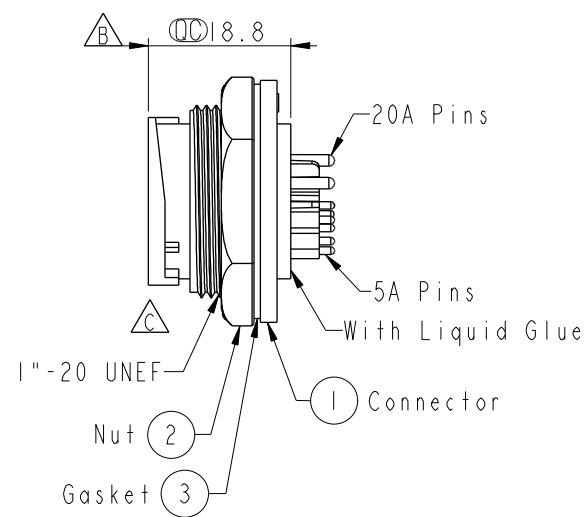




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1130424	2011/03/07	Kevin Wang	Modify the Dimension
C	LEN14C0055	2014/11/19	Sam	Update View&Logo.
D	CI90314	2019/03/12	Ruru	Modify Note



Recommended
PCB Lay-out

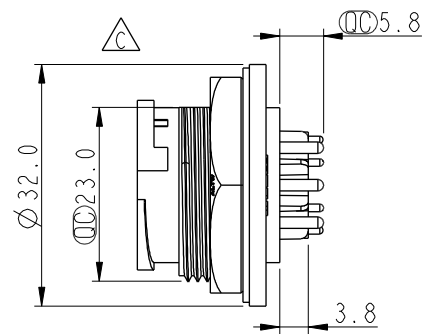

Pin Assignments
Front View



Recommended
Panel Cut-Out

- NOTE:
- * Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Panel Connector 3FPin(20A)+9MPin(5A)PCB		ITEM NO DCD-12PMDP-LC7001		DRAWN BY Ruru		DATE 2019-03-12	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1		DWG NO DCD-12PMDP-LC7001		CHECKED BY Rita		DATE 2019-03-12	
REV. D		WC-REV. A.2		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-12	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司