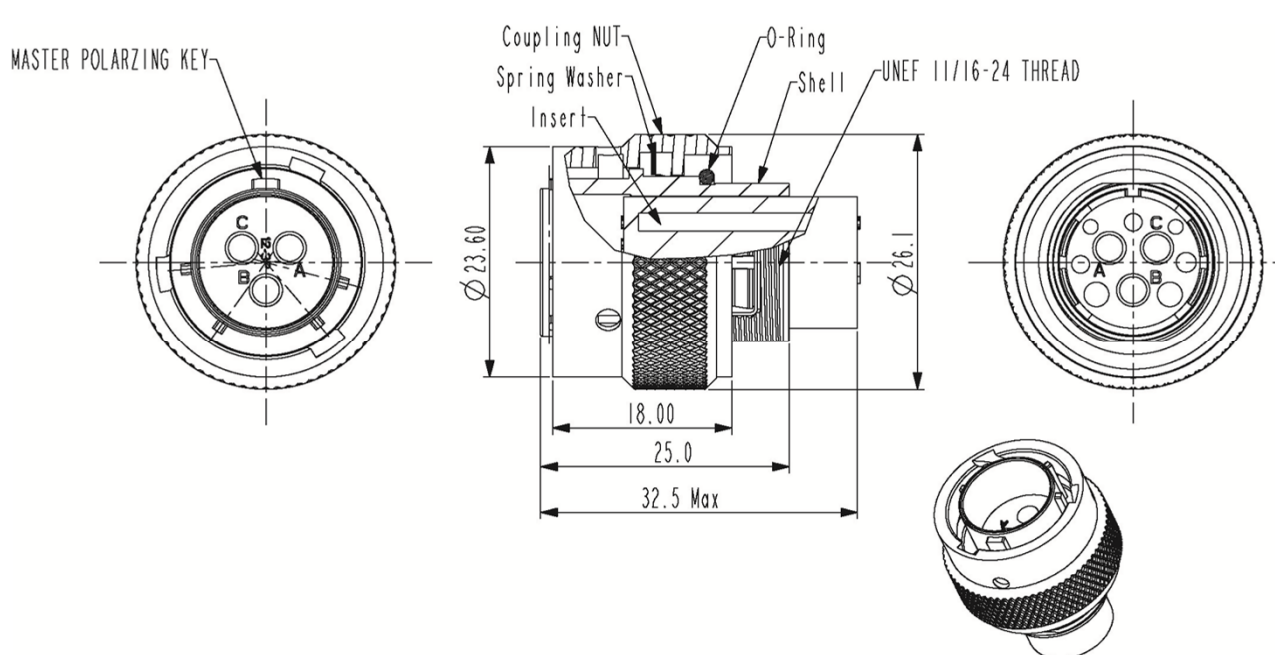


CONFIGURATION		PART NUMBER
Male Plug, 3 Pin, 16 Awg, Shell 12		RT06123PNH
DIMENSIONS		
 Technical drawing of the RT06123PNH connector. The drawing includes three views: a front view on the left showing the master polarizing key and pin positions A, B, and C; a side view in the center showing the coupling nut, spring washer, insert, O-ring, and shell with dimensions; and a rear view on the right showing the internal pin arrangement. Dimensions include an outer diameter of 23.60, an inner diameter of 26.1, a coupling nut length of 18.00, a total length of 25.0, and a maximum length of 32.5. Labels include MASTER POLARIZING KEY, Coupling NUT, Spring Washer, Insert, O-Ring, Shell, UNEF 11/16-24 THREAD, and pin positions A, B, and C.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	250V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	Aluminum, Nickel Plated	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	-	
CURRENT:	13A	
CONTACT SIZE:	16 Awg	
APPROVALS:	UL ECBT2	