

## Accessories - IC-DFR 13 - 1852134

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Accessories, Number of positions: 13, Pitch: 5.08 mm, Color: green, This assembly frame can only be used in combination with IC 2,5/...-STGF-5,08

### Product Features

- Feed-through assembly frame for inverted COMBICON plug IC 2,5/-STGF-5,08
- Vibration-resistant screw connection for both plugs provided by screw flanges
- Frame in plate cutout can be used and screwed on.
- Snap-locking of the IC plug into the frame
- Fitting the MSTB 2,5/...-STF-5,08 plug from outside
- Up to a panel thickness of 1.5 mm, the frame can be screwed before the IC plug is mounted



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| Minimum order quantity               | 50 pc   |
| GTIN                                 | <br>4 017918 109011 |
| Weight per Piece (excluding packing) | 3.28 g  |
| Custom tariff number                 | 39269097  |
| Country of origin                    | Poland  |

### Technical data

#### Dimensions

|             |          |
|-------------|----------|
| Pitch       | 5.08 mm  |
| Dimension a | 60.96 mm |

#### General

## Accessories - IC-DFR 13 - 1852134

### Technical data

#### General

|  |                     |
|--|---------------------|
| Range of articles                      | IC-DFR              |
| Insulating material group              | I                   |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Number of positions                    | 13                  |

#### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440210 |
| eCl@ss 9.0 | 27440210 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000879 |
| ETIM 4.0 | EC000879 |
| ETIM 5.0 | EC002310 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Accessories

Accessories

Mounting material

## Accessories - IC-DFR 13 - 1852134

### Accessories

Screw set - DFK-MSTB-SS - 0708263



Screw set, for securing the header to the device wall, consists of an M3 x 10 screw, with a spring washer and a nut

### PCB plug


Printed-circuit board connector - IC 2,5/13-STGF-5,08 - 1825611




Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 13, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

### Drawings

Drilling diagram

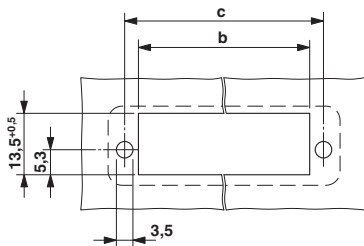

Dimensional drawing

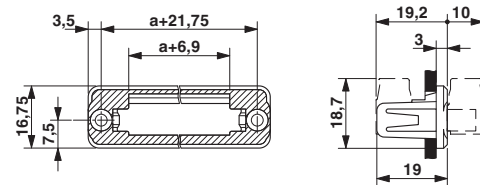

Dimension b: 10.84 mm + (no. of pos. x 5.08 mm)

Dimension c: Dim. b + 5.83 mm