

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0457730003

Status:


Active

Overview:

Micro-Fit 3.0™ Connectors

Description:

Micro-Fit 3.0™ Crimp Terminal, Female, with Lubricant, with Gold (Au) Plated Phosphor Bronze Contact, 20-24 AWG, Reel

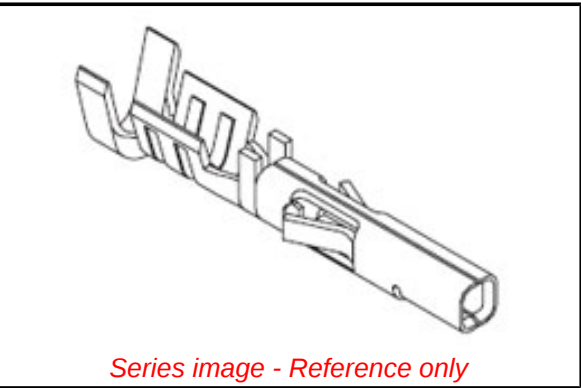

Documents:	
Drawing (PDF)	Test Summary TS-43045-001 (PDF)
Product Specification PS-43045 (PDF)	Test Summary TS-43045-002 (PDF)
Product Specification PS-43650 (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	Crimp Terminals
Series	45773
Application	Power
Crimp Quality Equipment	Yes
Overview	Micro-Fit 3.0™ Connectors
Product Name	Micro-Fit 3.0™
UPC	822348293964
Physical	
Durability (mating cycles max)	30
Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	0.067/g
Packaging Type	Reel
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.85mm max.
Wire Size AWG	20, 22, 24
Wire Size mm²	N/A
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-43045, PS-43650
Sales Drawing	SD-45773-001
Test Summary	TS-43045-001, TS-43045-002

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Contains SVHC(2014 December 17): No	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant

Search Parts in this Series

45773 Series

Mates With

43031 Micro-Fit 3.0™ Male Crimp Terminals

Use With

43025 , 43645 Micro-Fit 3.0™ Receptacle Housings, 44133 Micro-Fit BMI™ Panel Mount Receptacle Housings

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
FineAdjust™ Applicator for Insulation OD	0639018800

1.10-1.30mm - 20-24	
AWG	
FineAdjust™	<u>0639018900</u>
Applicator for	
Insulation OD	
0.91-1.09mm - 20-24	
AWG	
FineAdjust™	<u>0639004500</u>
Applicator for	
Insulation OD	
1.30-1.85mm, 20-24	
AWG Wire	
Hand Crimp Tool	<u>0638190000</u>
Insertion Tool for	<u>0638120800</u>
Crimp Terminal	
T2 Terminator™	<u>0639118800</u>
for insulation OD	
1.10-1.30mm - 20-24	
AWG	
T2 Terminator™	<u>0639104500</u>
for insulation OD	
1.30-1.85mm - 20-24	
AWG	
T2 Terminator™	<u>0639118900</u>
for insulation OD	
0.91-1.09mm - 20-24	
AWG	