

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. BNC MALE TO BNC MALE CABLE ASSEMBLY ON RG58C/U COAXIAL CABLE, 50Ω w/MOLDED BEND RELIEF BOOTS.
2. SPECIFICATIONS:
CONNECTOR:
BNC MALE CRIMP, 50Ω IMPEDANCE PER MIL-C-39012.
BODY: BRASS OR DIECAST ZINC.
DIELECTRIC: TEFLON.
CENTER PIN: BRASS, GOLD PLATED.

CABLE:
RG58C/U PER MIL-C-17
50Ω, BLACK, Ø0.195 DIAMETER.

MOLDED BOOT MATERIAL:
PVC, BLACK. (MOLDED TO CABLE AND CONNECTOR).
3. RATING:
VOLTAGE: 500Vrms.
IMPEDANCE: 50Ω.
TEMPERATURE: 0° C TO +80° C.


REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	10/24/02	


PART NUMBER

CT2942-L

LENGTH: (CENTIMETERS)
STANDARDS: 25, 50, 100, 120, 150, 200, 250

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4604			
			APPROVALS		DATE		TITLE	
		MATERIAL	DRAWN WDH		10/20/02		CABLE ASSEMBLY, BNC MALE TO MALE, RG58C/U, 50Ω	
		FINISH	CHECKED				SIZE	
NEXT ASSY			ENGR.				CAGE CODE	
USED ON			DESIGN ACTIVITY				DWG. NO.	
APPLICATION							P294200	
					SCALE NONE		REV. -	
					SHEET 1 OF 2			

THIS IS ISSUED IN STRICT CONFIDENCE
THAT IT IS NOT USED AS A BASIS FOR
MANUFACTURE OR SALE AND THAT IT
IS NOT COPIED, REPRINTED OR
DISCLOSED TO A THIRD PARTY EITHER
WHOLLY OR IN PART WITHOUT THE
PRIOR WRITTEN CONSENT OF CAL TEST
ELECTRONICS, INC.

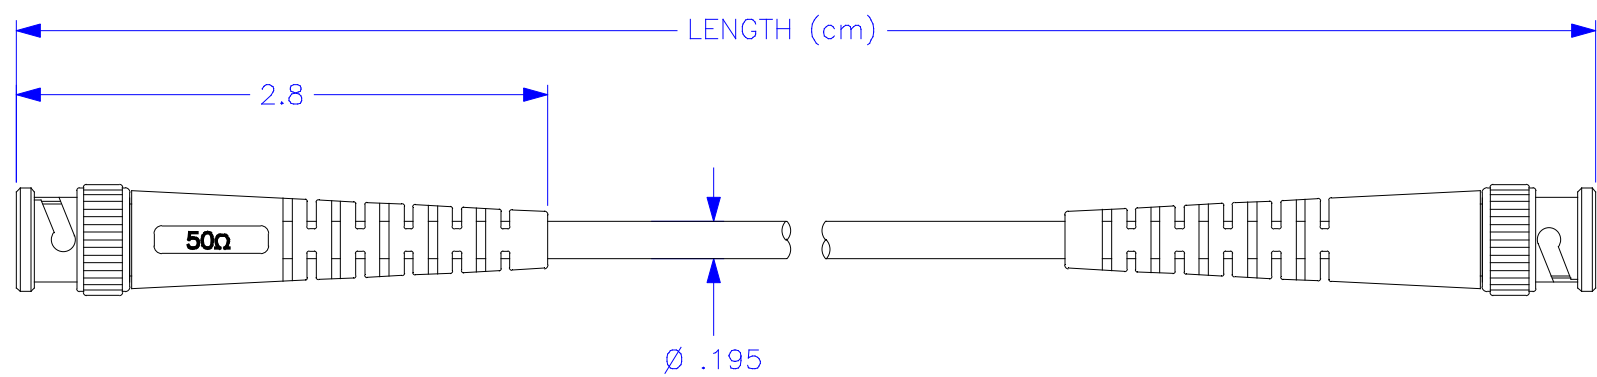

DRAWN		WDH	10/20/02	SIZE	A	CAGE CODE	DWG. NO.	P294200	REV.	—
CHECKED				SCALE	1:1			SHEET	2 OF 2	