
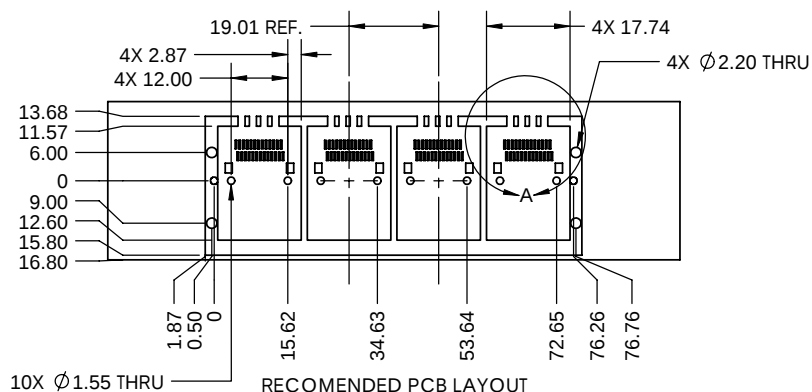
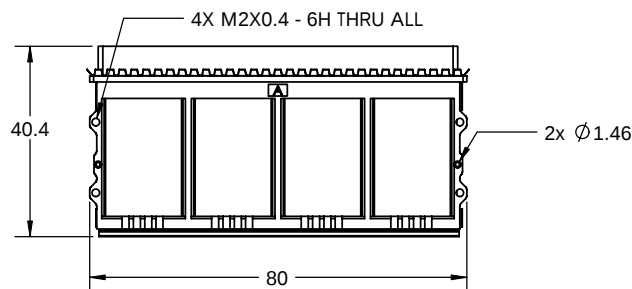


RECOMENDED PANEL CUT-OUT




RECOMENDED PCB LAYOUT

DO NOT SCALE DRAWING


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.



RECOMENDED FACE PLATE TO LOCATING POST DISTANCE

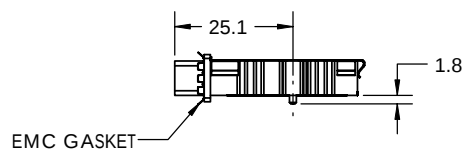

EMC GASKET

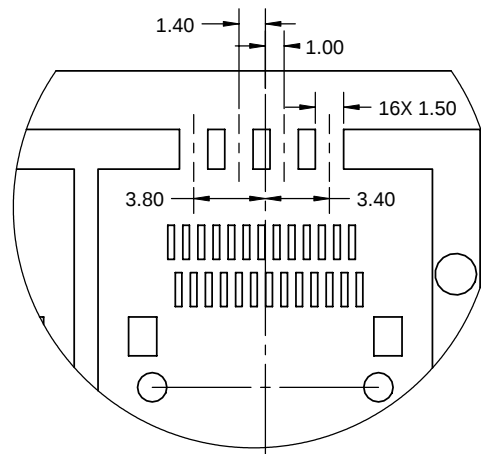


DETAIL A
SCALE 4 : 1

REVISIONS


REV.	ECN	DESCRIPTION	DATE	APPROVED
A	X	PRELIMINARY	MAY 23/07	
B	X	ASSEMBLY PART NUMBERS ADDED	JULY 13/07	
C	X	76.30 ADDED	MAR 25/08	
D	X	CAGE COVER MATERIAL CHANGE	JUN 02/08	ZLJ



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE	Amphenol Canada Corp.	
DECIMALS X.X ± 0.15 X.XX ± 0.05 X.XXX ± 0.025		DRAWN		ZLJ	MAY 23/07	
ANGLES ± 0.5°		DESIGNED		ZLJ	MAY 23/07	
MATERIAL AND FINISH X		CHECKED		X	X	
REF.		QA APPD.		R.CURTIS	X	
CODE IDENT. NO. 03554		IE APPD.		A.GREEN	X	
		DWG APPD.				
		SCALE		1:1	PROJECT	
		SHEET		1 OF 2		

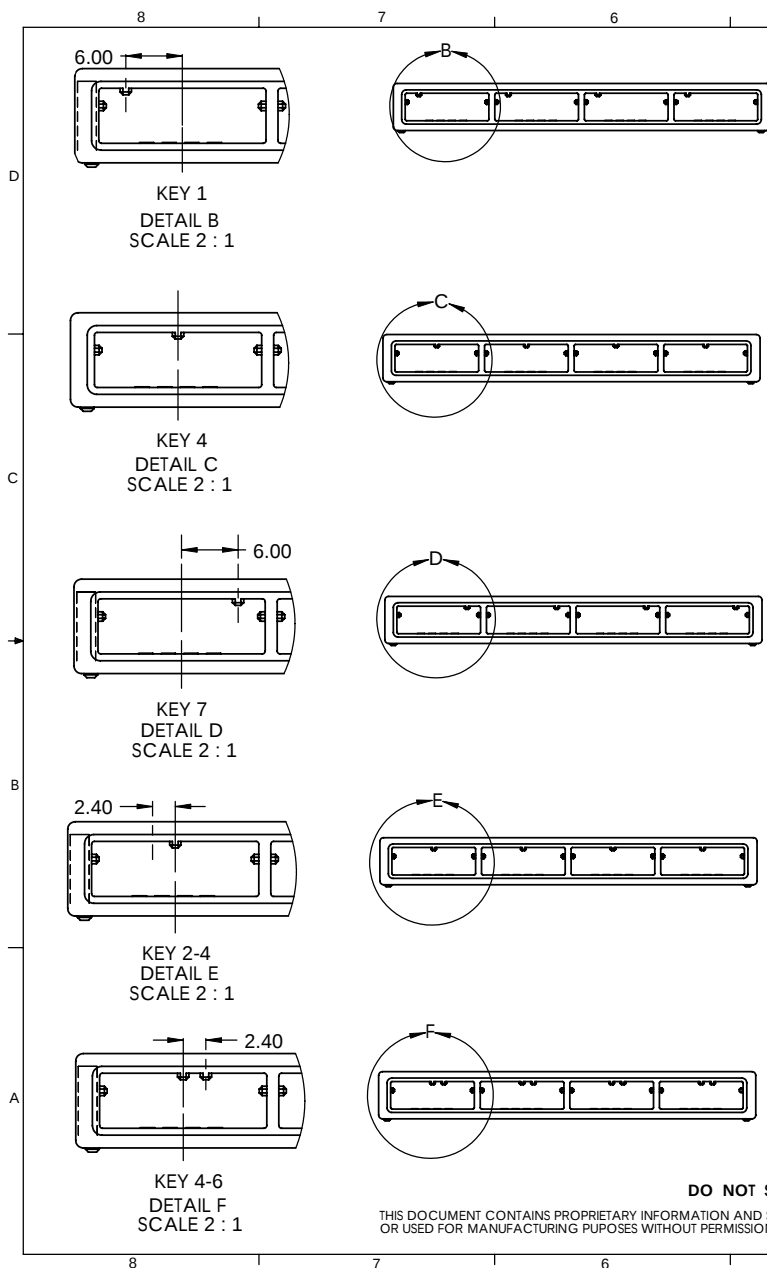

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
D	X	CAGE COVER MATERIAL CHAGNE	JUN 02/08	ZLJ

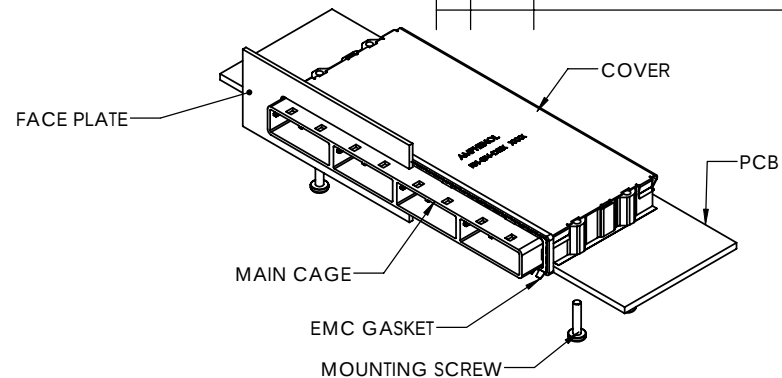

Key Option	All Ports	Description	Cage Part Number
1		SATA 'X' Cable	FS1-SF4-11E1
4		SAS Universal Port	FS1-SF4-14E1
7		SATA 'M' Cable	FS1-SF4-17E1
2, 4		SAS Out Port	FS1-SF4-1D22E1
4, 6		SAS In Port	FS1-SF4-1D66E1

NOTES:

1) MATERIAL:

MAIN CAGE: ZINC DIECAST SHELL WITH 150 MICROINCHES OF NICKEL PLATING

EMC GASKET: STAINLESS STEEL

COVER: STAINLESS STEEL

MOUNTING SCREW: M2 X 0.4, QTY 6 SUPPLIED, BULK PACKED

2) ROHS COMPLIANT

3) COMPLIES WITH SFF-8088

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE		Amphenol Canada Corp.	
DECIMALS X.X ± 0.15 X.XX ± 0.05 X.XXX ± 0.025		DRAWN		ZLJ		MAY 23/07	
ANGLES ± 0.5°		DESIGNED		ZLJ		MAY 23/07	
MATERIAL AND FINISH X		CHECKED		X		X	
REF.		QA APPD		R.CURTIS		X	
CODE IDENT. NO. 03554		IE APPD		A.GREEN		X	
DWG APPD		SCALE		PROJECT		SHEET 2 OF 2	