



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	J	REVISED PER ECO-17-000037	10MAR2017	RS	MZ

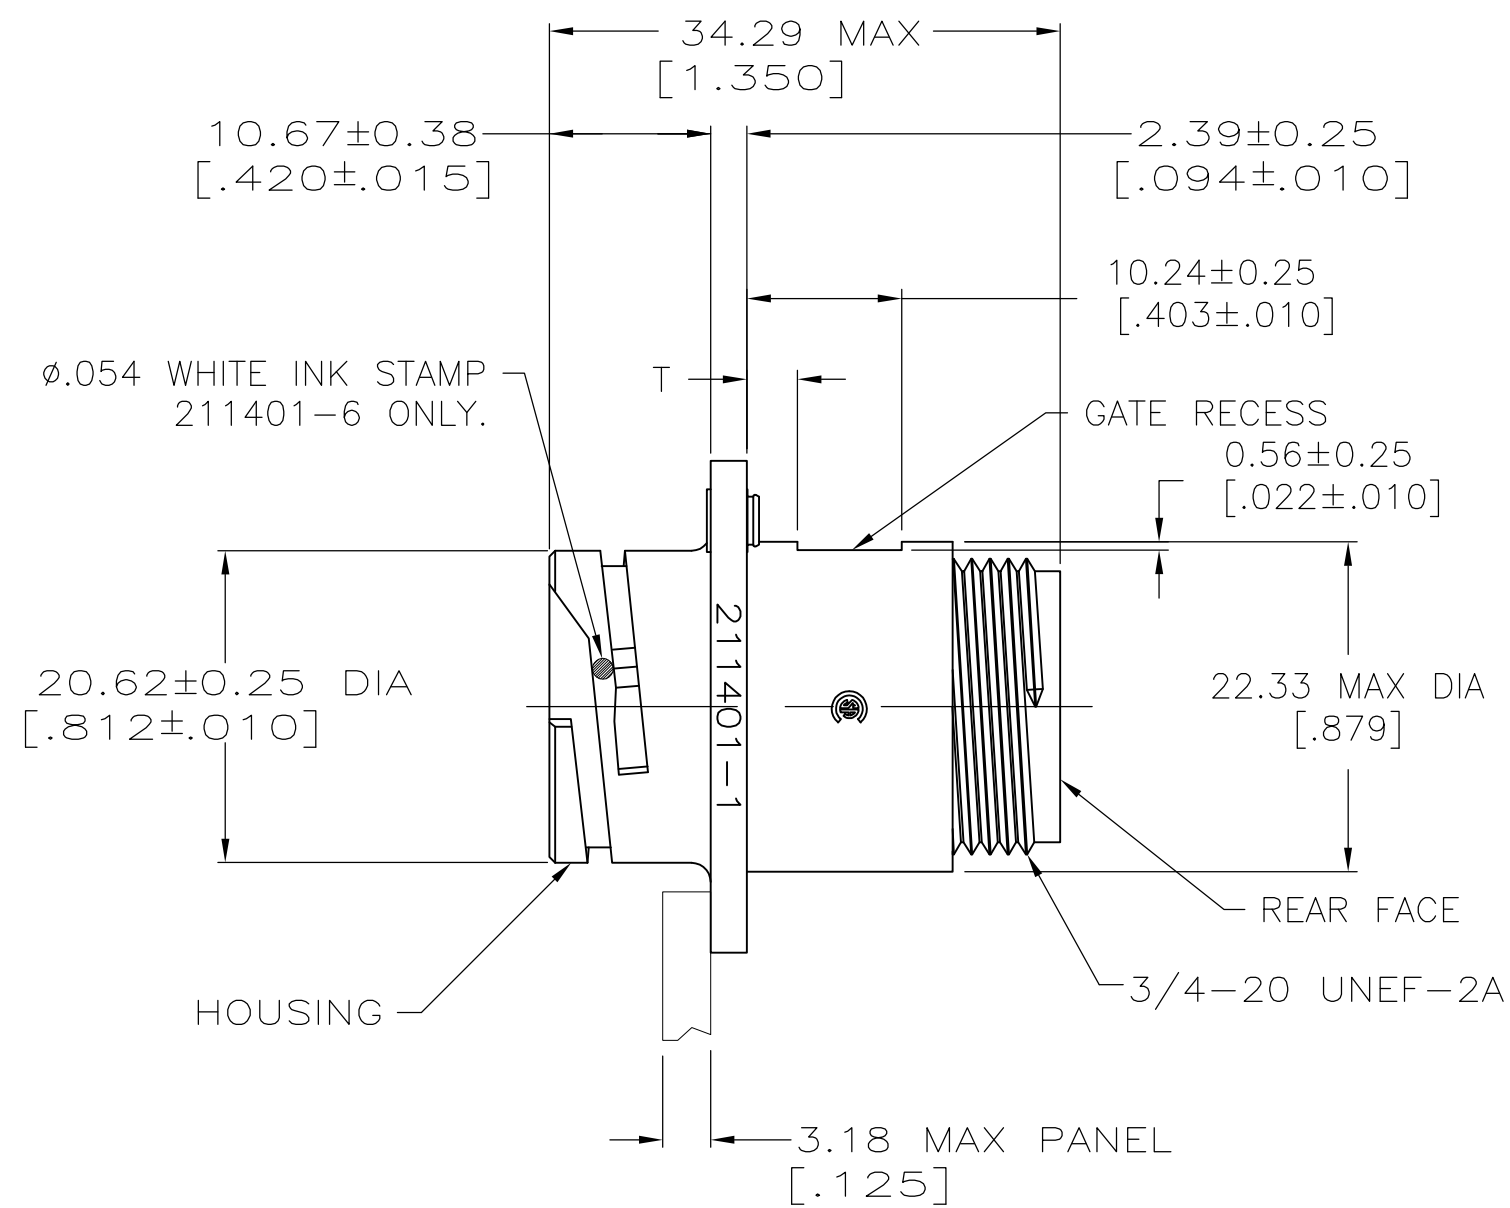

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN <u>D.HARDY</u> 08-01-94		 TE Connectivity				
		CHK <u>R.STONE</u> 08-10-94						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± —		NAME RECEPTACLE HOUSING, STANDARD SEX, 13-7, CPC				
		APVD — PRODUCT SPEC — APPLICATION SPEC —						
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		—		A2	00779	C-211401	—	
CUSTOMER DRAWING						SCALE 2:1	SHEET 1 OF 2	REV J

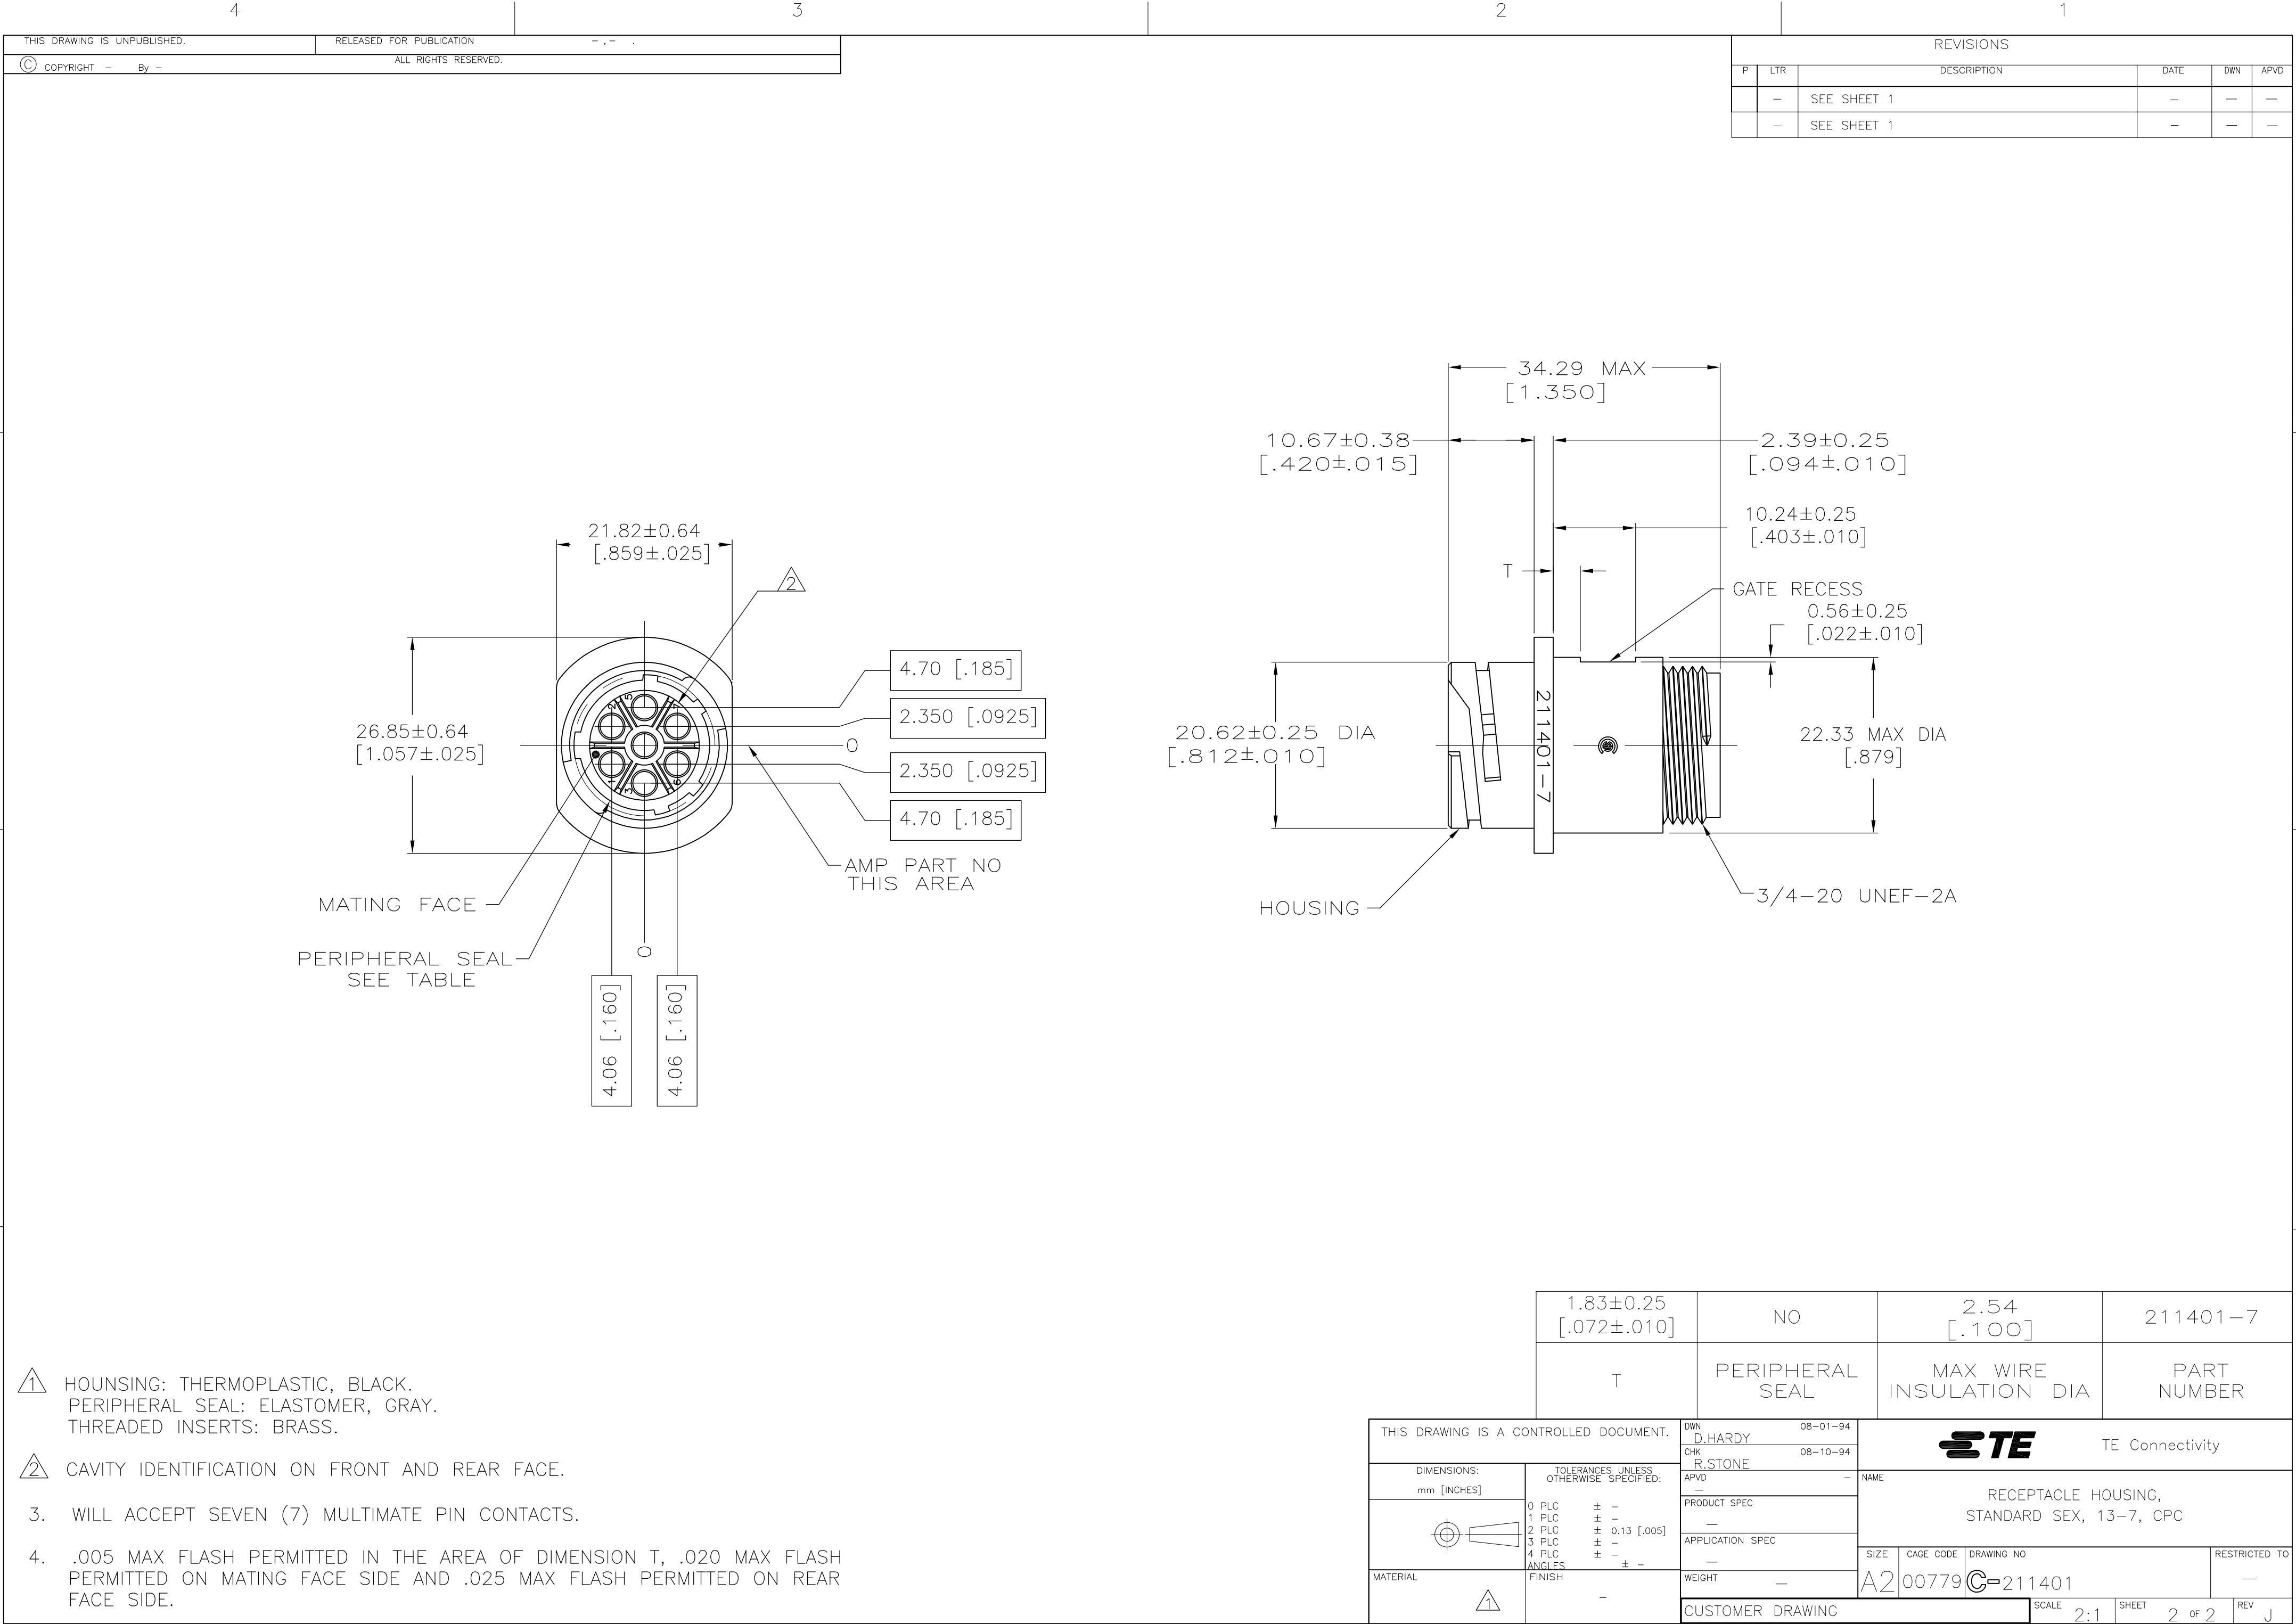

- 1 HOUNSING: THERMOPLASTIC, BLACK.
PERIPHERAL SEAL: ELASTOMER, GRAY.
THREADED INSERTS: BRASS.
- 2 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
3. WILL ACCEPT SEVEN (7) MULTIMATE PIN CONTACTS.
4. .005 MAX FLASH PERMITTED IN THE AREA OF DIMENSION T, .020 MAX FLASH PERMITTED ON MATING FACE SIDE AND .025 MAX FLASH PERMITTED ON REAR FACE SIDE.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-
-	-	SEE SHEET 1	-	-	-

1.83 ± 0.25 [.072 ± .010]	NO	2.54 [.100]	211401-7
T	PERIPHERAL SEAL	MAX WIRE INSULATION DIA	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 08-01-94	 TE Connectivity			
		CHK R.STONE 08-10-94				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD —	NAME RECEPTACLE HOUSING, STANDARD SEX, 13-7, CPC			
		PRODUCT SPEC —				
		APPLICATION SPEC —				
		—				
MATERIAL	FINISH	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=211401	RESTRICTED TO —
	—	CUSTOMER DRAWING	SCALE 2:1		SHEET 2 of 2	REV J