




TOP VIEW

SIDE VIEW

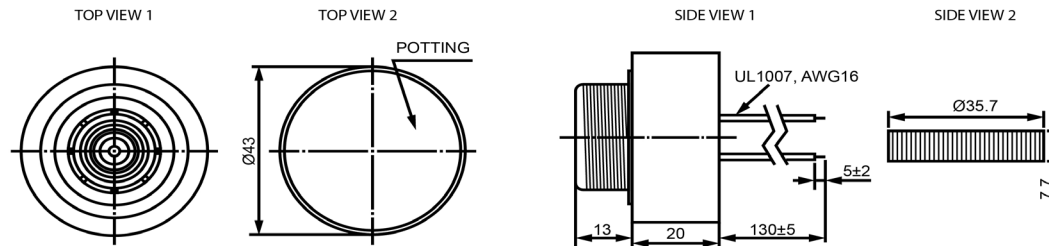

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	2,900	(Hz)								
Rated Voltage	12	(V)								
SPL @ 10cm	110	(dBA)								
Tone	Single									
Mount Type	Panel Mount									
Voltage Range	3 ~ 20	(V)								
Max Rated Current	50	(mA)								
Housing Material	ABS									
Operating Temperature	-20 ~ +60	°C								
Storage Temperature	-30 ~ +70	°C								
Weight	43	(g)								
 DB UNLIMITED						IP432912-4				
			Drawn by			Date	Checked by	Date	Approved by	Date
			A.B.			10/21/2013	C.E.	10/21/2013	J.S	10/21/2013