
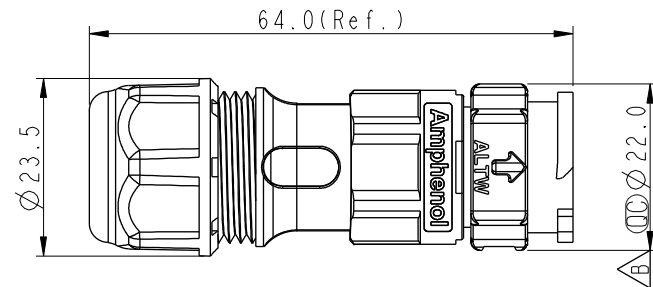

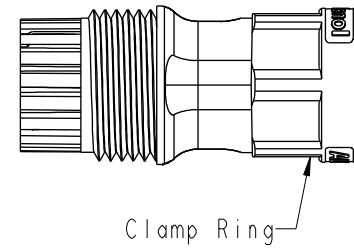


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2018/03/14	Mafei	Change Rev.01 To Rev.A
B	E191814	2019/10/23	Ruru	B X3


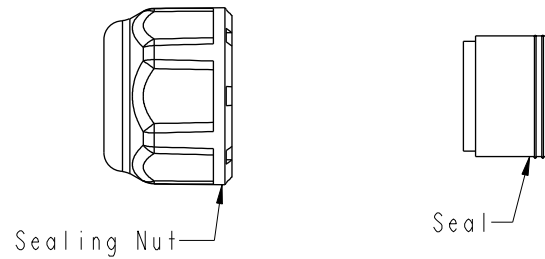


CC-XXBMMB-QLXPP


02-2 Pin —

03-3 Pin —

—S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
—M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
—L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
—A: With Seal 1 & Seal 2 & Seal 3.

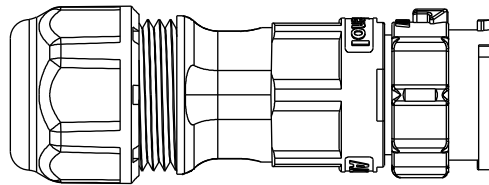

2 Pin



3 Pin

UNIT: mm



TOLERANCE

 $\pm 0.5 \text{ mm}$

TITLE

XLOK, C-20A, 02P, CABLE W/O SR
M, M, FI SCREW IN, XLOK 

SCALE 8.5

SIZE	A 4
------	-----

SHEET	OF	2
-------	----	---

REV. B

WC-REV. A 3

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DESCRIPTION	QTY	UNIT	PRICE	TOTAL
1	...	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...
11	...	...	...	...	...
12	...	...	...	...	...
13	...	...	...	...	...
14	...	...	...	...	...
15	...	...	...	...	...
16	...	...	...	...	...
17	...	...	...	...	...
18	...	...	...	...	...
19	...	...	...	...	...
20	...	...	...	...	...
21	...	...	...	...	...
22	...	...	...	...	...
23	...	...	...	...	...
24	...	...	...	...	...
25	...	...	...	...	...
26	...	...	...	...	...
27	...	...	...	...	...
28	...	...	...	...	...
29	...	...	...	...	...
30	...	...	...	...	...
31	...	...	...	...	...
32	...	...	...	...	...
33	...	...	...	...	...
34	...	...	...	...	...
35	...	...	...	...	...
36	...	...	...	...	...
37	...	...	...	...	...
38	...	...	...	...	...
39	...	...	...	...	...
40	...	...	...	...	...
41	...	...	...	...	...
42	...	...	...	...	...
43	...	...	...	...	...
44	...	...	...	...	...
45	...	...	...	...	...
46	...	...	...	...	...
47	...	...	...	...	...
48	...	...	...	...	...
49	...	...	...	...	...
50	...	...	...	...	...
51	...	...	...	...	...
52	...	...	...	...	...
53	...	...	...	...	...
54	...	...	...	...	...
55	...	...	...	...	...
56	...	...	...	...	...
57	...	...	...	...	...
58	...	...	...	...	...
59	...	...	...	...	...
60	...	...	...	...	...
61	...	...	...	...	...
62	...	...	...	...	...
63	...	...	...	...	...
64	...	...	...	...	...
65	...	...	...	...	...
66	...	...	...	...	...
67	...	...	...	...	...
68	...	...	...	...	...
69	...	...	...	...	...
70	...	...	...	...	...
71	...	...	...	...	...
72	...	...	...	...	...
73	...	...	...	...	...
74	...	...	...	...	...
75	...	...	...	...	...
76	...	...	...	...	...
77	...	...	...	...	...
78	...	...	...	...	...
79	...	...	...	...	...
80	...	...	...	...	...
81	...	...	...	...	...
82	...	...	...	...	...
83	...	...	...	...	...
84	...	...	...	...	...
85	...	...	...	...	...
86	...	...	...	...	...
87	...	...	...	...	...
88	...	...	...	...	...
89	...	...	...	...	...
90	...	...	...	...	

DWG NO	
--------	--

CUSTOMER

ITEM NO	
DWG NO	CC-XXBMMB-QL8XPP
CUSTOMER	ALTW

DRAWN BY	
----------	--

	CHECKED BY
--	------------

	APPROVED BY
--	-------------

M a f e i

Jerry

BY Max

DATE

	DATE
--	------

	DATE
--	------

2018-03-14


2018-03-14

2018-03-14

 Note:

- *  Important Dimension
- * Waterproof Rate: IP68, Mated
IP68 : 1M Depth Of Water In 24hours
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

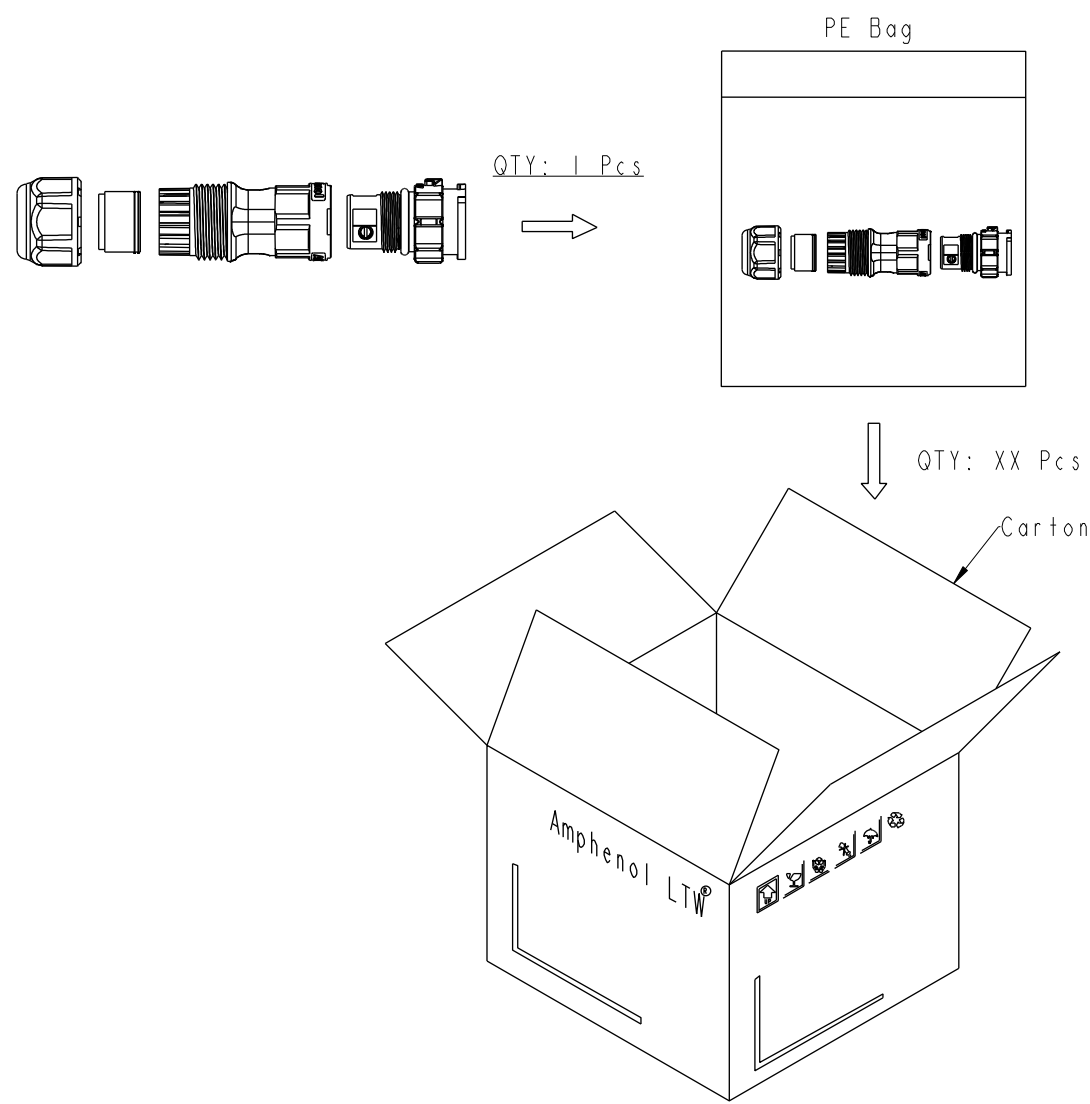

Note:
* One Set Unassembled In One PE Bag.
(每一組未組裝，放置於一個PE袋，並封口，如圖示)
* Label is Attached To PE Bag Front.
(標籤貼在PE袋正面)

A	UNIT:mm				TITLE XLOK, C-20A, 02P, CABLE W/O SR M, M, FI SCREW IN, XLOK		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY		DATE					
	TOLERANCE ±0.5 mm								SCALE 8:5		SIZE A4		SHEET 2 OF 2		DWG NO CC-XXBMMB-QL8XPP		CHECKED BY Jerry	
					REV. B				WC-REV. A.3		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2018-03-14	
	1		2		3				4		5		6		7		8	
																WI0814-03-0001A2		