

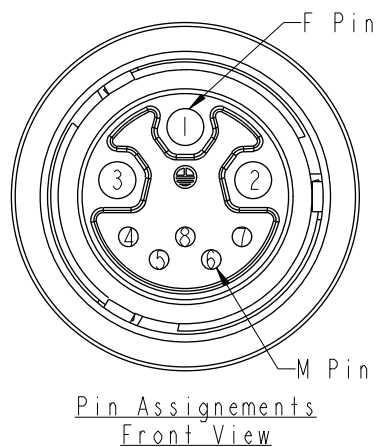


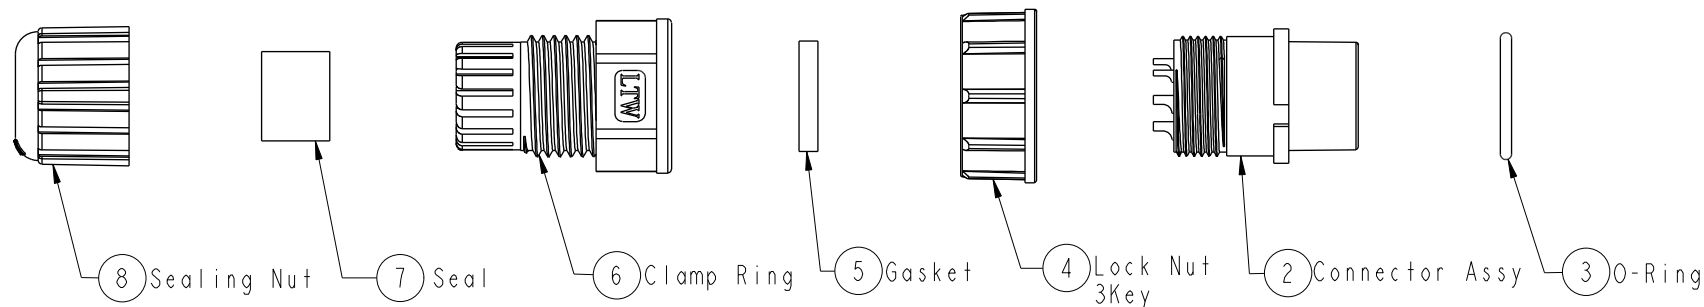


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2011/07/26	Kevin Wang	
B	LEN1350051	2013/04/24	Ruru	Modify Cable OD Max



Pin Assignments
Front View

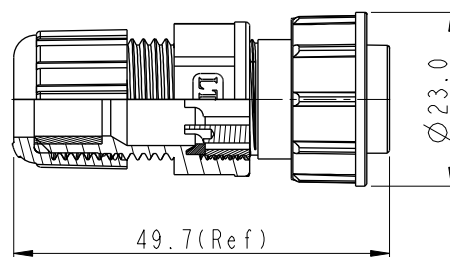

Conn.

Note:

- * Important Dimension.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM, Black
- * Lock Nut: Nylon+GF, Black
- * Gasket: Silicone, Black
- * Clamp Ring: Nylon, Black
- * Seal: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Cable OD Max : $\varnothing 7.6 \sim \varnothing 9.6 \text{mm}$

UNIT:mm		
TOLERANCE		
.X	± 0.25	
.XX	± 0.1	
.XXX	± 0.05	
ANGLES	$\pm 1^\circ$	

TITLE HyBrid Assy., Middle, 3Key 3FPin(10A)+5MPin(2A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. B.1	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. CBU-08BFDA-TL7001	DRAWN BY Ruru	DATE 2013-05-06
DWG NO. CBU-08BFDA-TL7001	CHECKED BY Rita	DATE 2013-05-06
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-05-06