

DIN Connector, Socket, 7-pole, solder terminals for PCB



7-pole

**Description**

- PCB Mounting
- DIN Plug: 7-pole, straight

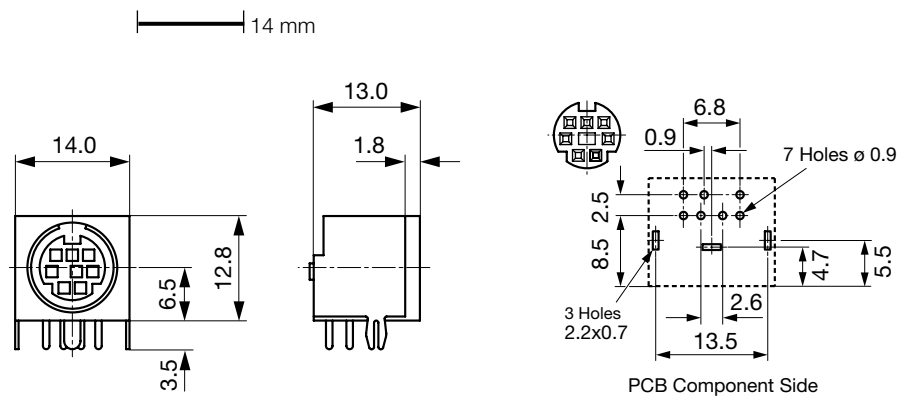
Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | |
|-----------------------|-------------------|
| Diameter | 9.0 mm |
| Number of Poles | 7-pole |
| Ratings DC | 1 A / 12 VDC |
| Ratings AC | 1 A / 100 VAC |
| Dielectric Strength | 250 VAC |
| Insulation Resistance | > 50 MΩ @ 250 VDC |

| | |
|---------------------------|------------------------------------|
| Allowable Operation Temp. | -20°C to 70°C |
| Terminal | PCB solder terminals silver plated |
| Lifetime | 5000 Insertions |

Dimensions**Variants**

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|-----------------|---------------|-----------------|----------------------|--------------|
| DIN Plug/Socket | 9.0 | 7-pole | PCB solder terminals | 4850.2710 |

Packaging unit 750 Pcs

Mating Inlets/Plugs

Category / Description



[DIN Plug/Socket Overview complete](#)

DIN Connector, Plug, 7-pole, solder terminal

4850.1710

[DIN Plug/Socket further types to 4850 DIN-Stecker, verschiedene](#)

