


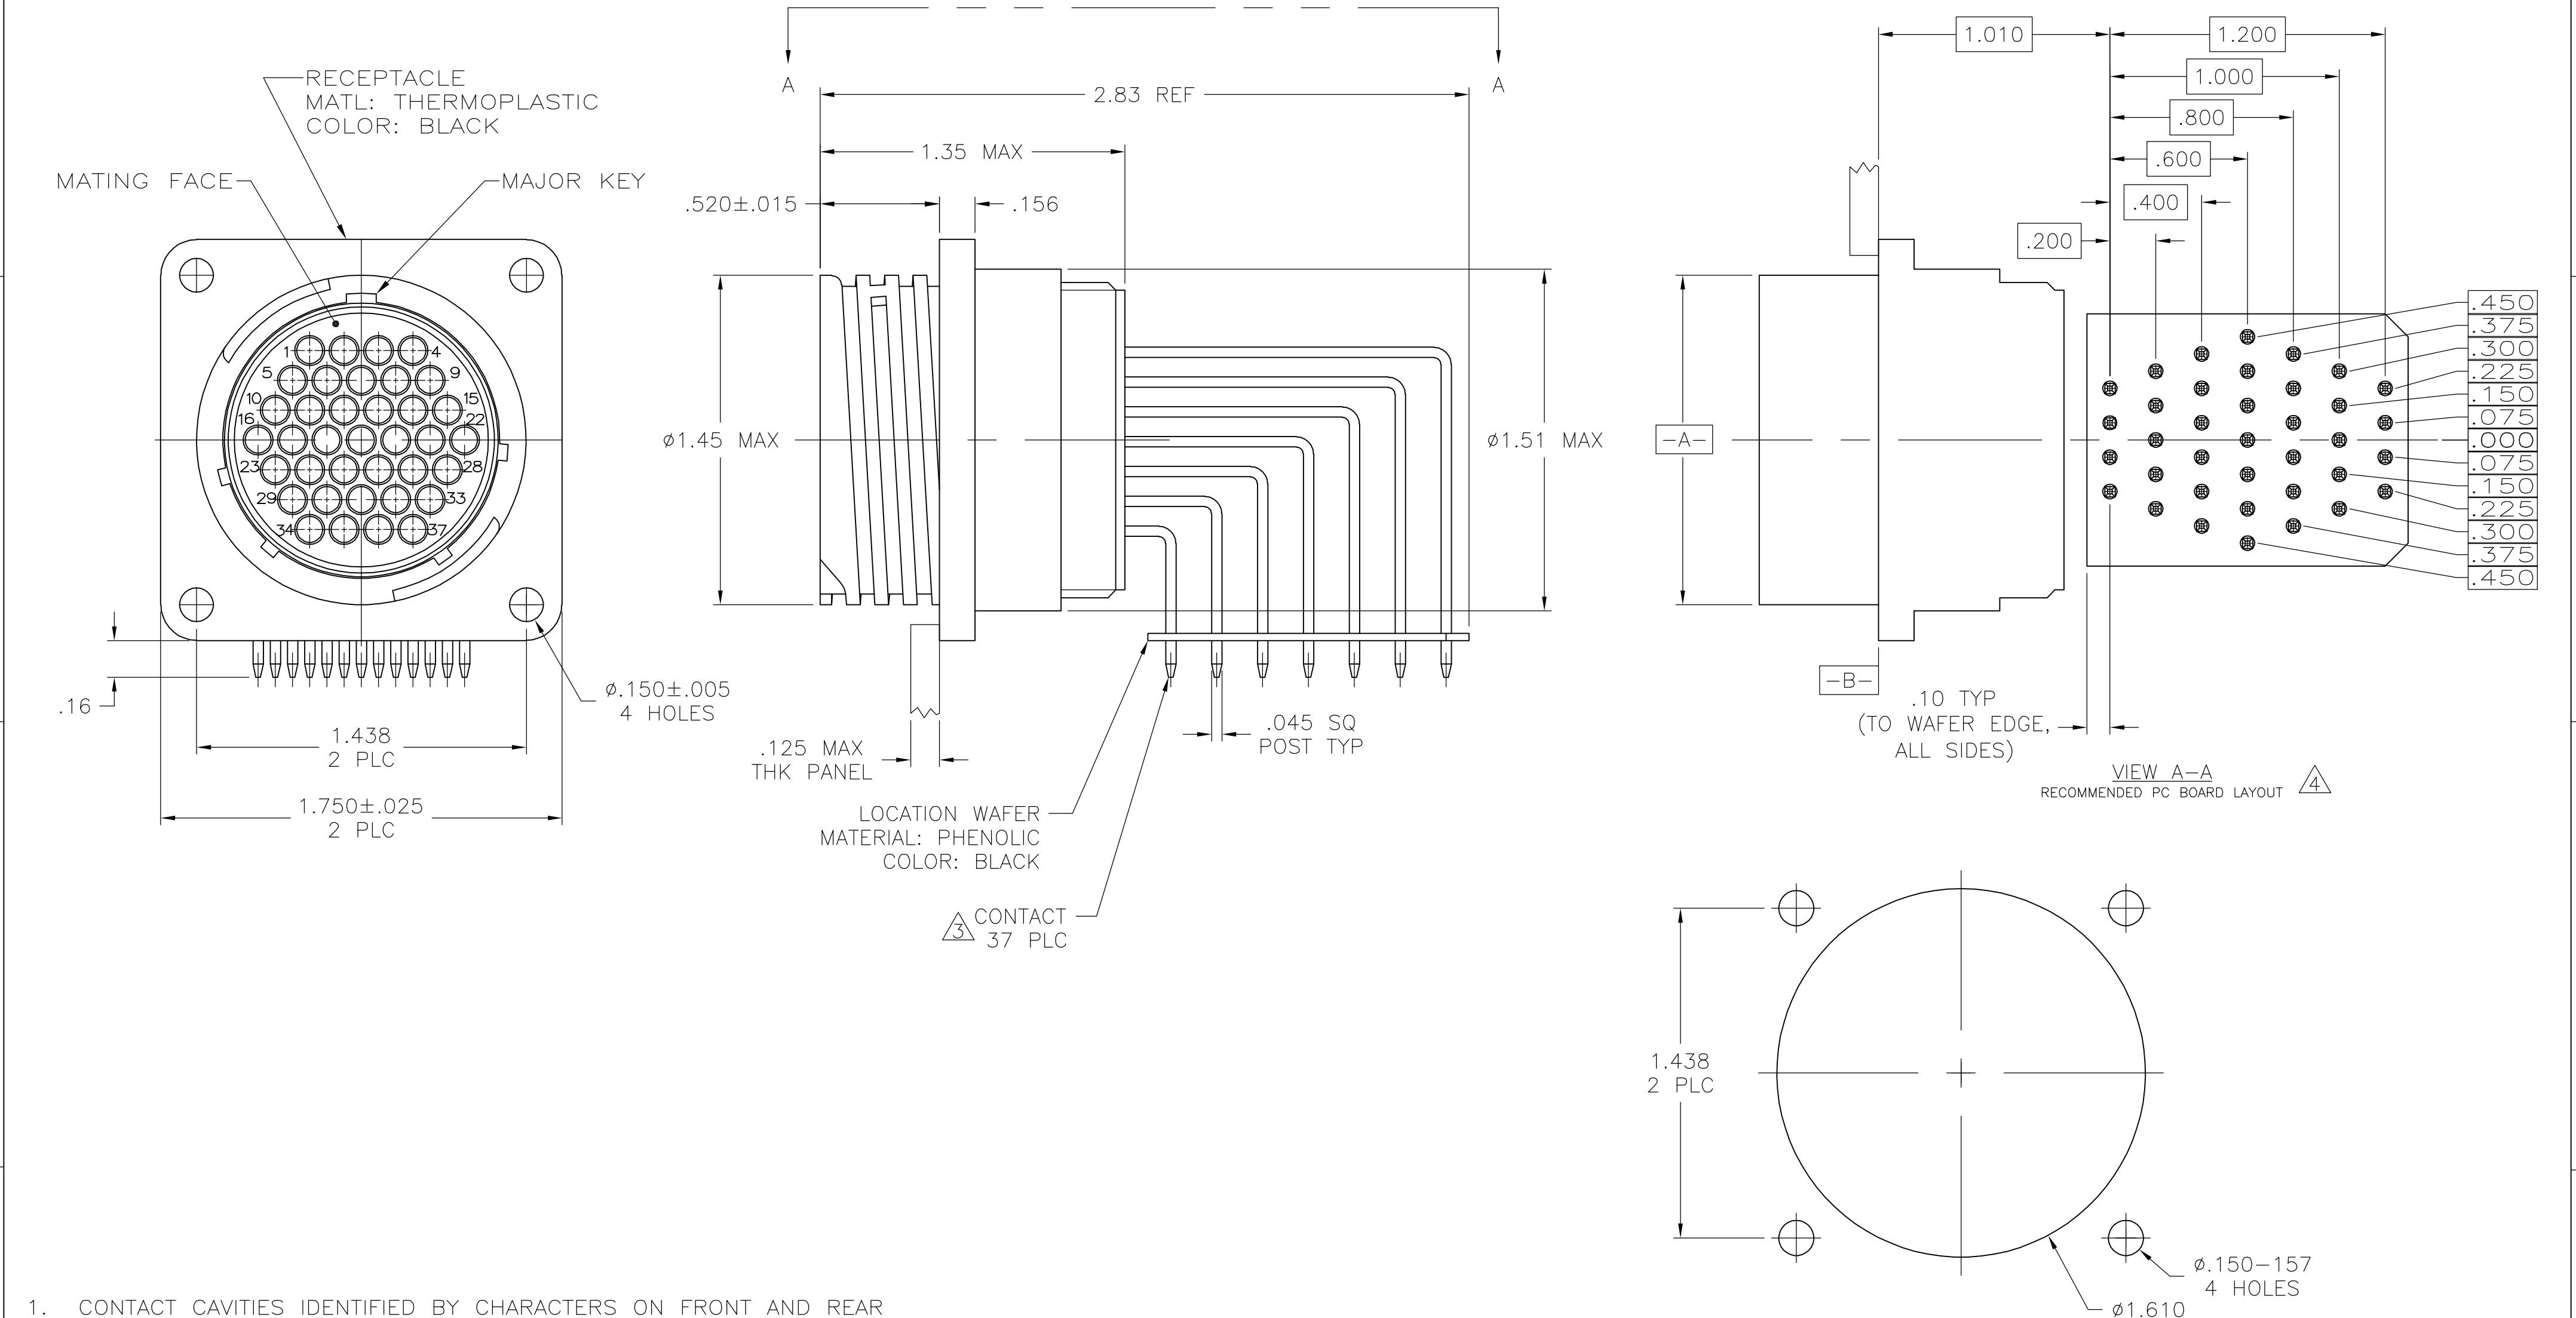

- CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
 - #6 FASTNER RECOMMENDED FOR MOUNTING.
- CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER MIN COPPER.
- PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 10/4/06	1776906-1	
DIMENSIONS: INCHES		CHK S HEADER 10/4/06	PART NUMBER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S HEADER 10/4/06		
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± .03				
3 PLC ± .010				
4 PLC ± -				
ANGLES ± -				
FINISH				
MATERIAL		WEIGHT		
		CUSTOMER DRAWING		

Tyco Electronics Corporation Harrisburg, PA 17105-3608		NAME	
RECEPTACLE ASSEMBLY, POSTED, RT ANGLE, STD SEX, SIZE 23-37, SERIES 1, CPC			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1776906	-
SCALE 2:1		SHEET 1 of 1	REV A